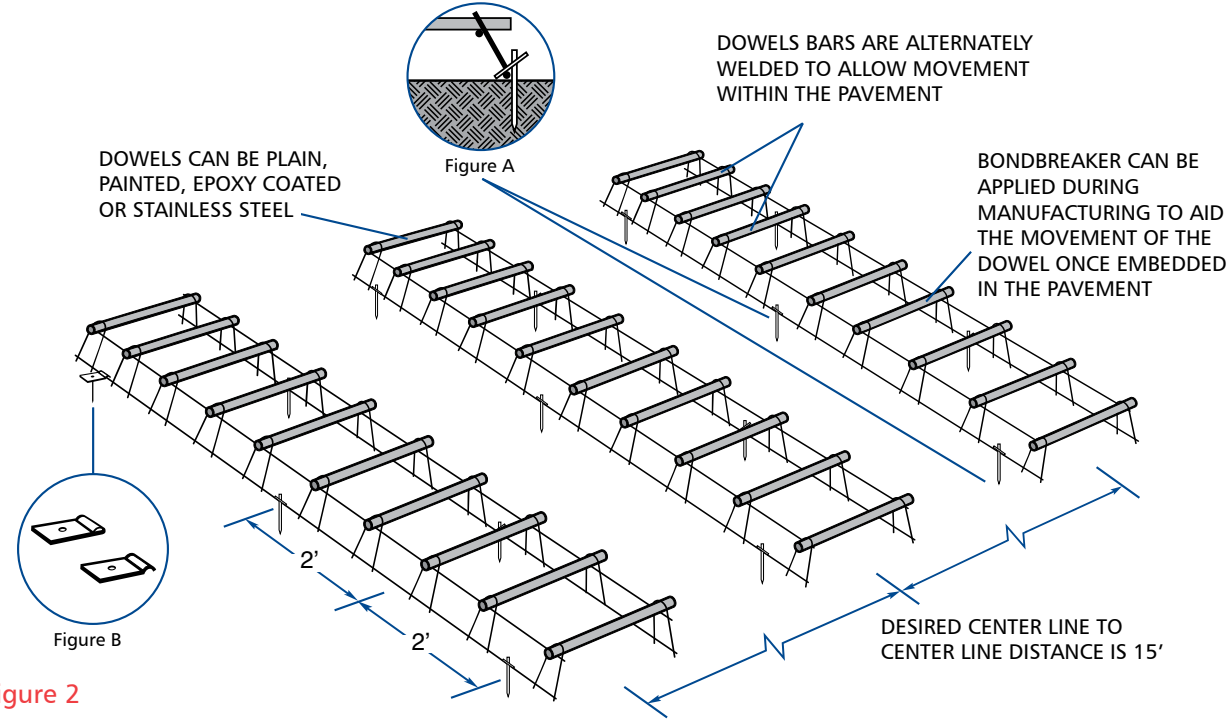
Figure A
DOWELS BARS ARE ALTERNATELY WELDED TO ALLOW MOVEMENT WITHIN THE PAVEMENT
DOWELS CAN BE PLAIN, PAINTED, EPOXY COATED OR STAINLESS STEEL
BONDBREAKER CAN BE APPLIED DURING MANUFACTURING TO AID THE MOVEMENT OF THE DOWEL ONCE EMBEDDED IN THE PAVEMENT
2'
2'
Figure B
DESIRED CENTER LINE TO CENTER LINE DISTANCE IS 15'

Figure 2