



MASTER CATALOG

MANUFACTURERS OF



QUALITY IS CHOICE

800-321-5336 diamondproducts.com

DIAMOND PRODUCTS WAREHOUSES



- 1. Cleveland, OH 216-712-6973
- 2. Grand Rapids, MI 616-554-4686 (Specialty Equipment)
- 3. Annapolis Junction, MD 800-342-4750
- 4. Austell, GA 888-472-2930 Regional Warehouse
- 5. Orlando, FL 407-896-1800
- 6. Franklin Park, IL 847-678-9543
- 7. Blue Springs, MO- 877-990-1385 Regional Warehouse
- 8. Missouri City, TX 281-491-0351
- 9. Monterrey, Mexico +52 (81) 8307-7477
- 10. Orange, CA 714-282-7816 Regional Warehouse

- 11. Hayward, CA 510-264-9199
- 12. Portland, OR 503-232-3480
- 13. Surrey, BC Canada 604-314-3299
- 14. Mississauga, ON Canada 905-565-1355 Regional Warehouse
- 15. Mascouche, QC Canada 514-990-2262
- 16. Dallas, TX 972-247-8871
- 17. Nampa, ID 800-225-0142 (Grooving & Grinding Division)
- 18. Calgary, AB Canada 403-287-0311
- 19. Mt. Uniacke, NS Canada 902-452-9133



Diamond Products Headquarters - Elyria, Ohio U.S.A.

INFORMATION PAGES

Table of Contents	1-7
Catalogs & Booklets	8
Point of Purchase Products Marketing Aids	9
Aggregate Map of the USA and Canada	10
Diamond Cutting Process	11
Diamond Blade Information	12
Website and Online Information	13
RPM Charts	14
Electrical Information	15

WET BLADES

Imperial Purple Cured Walk Behind Wet Blades	16
Heavy Duty Orange Cured Walk Behind Wet Blades	17
Premium Black Cured Walk Behind Wet Blades	18
Pro Blue Cured Walk Behind Wet Blades	19
Super Premium Silver Cured Walk Behind Wet Blades	20
Mega Premium Green Cured Walk Behind Wet Blades	21
Giga Titanium Cured Walk Behind Wet Blades	22
Imperial Purple Asphalt/Green/Overlay Walk Behind Wet Blades	23
Heavy Duty Orange Asphalt/Green/Overlay Walk Behind Wet Blades	24
Premium Black Asphalt/Green/Overlay Walk Behind Wet Blades	25
Pro Blue Asphalt/Green/Overlay Walk Behind Wet Blades	26
Super Premium Silver Asphalt/Green/Overlay Walk Behind Wet Blades	27
Wall Saw/Hand Saw Blade Information and Specifications	28
Hydraulic Hand Saw Blades	29
Wall Saw Blades - Premium Black, Pro Blue, Super Premium Silver	30
Wall Saw Blades Specifications	31
Crack Saw & Loop Blades	32
Bevel & Refractory Blades	33
Joint Widening Blades and Chamfer Blades	34
Ring Saw Blades	35
Diamond Wire & Accessories	36-37
DRY BLADES	
Dry Blade Specification Charts & Blade Bushings	39
High Speed Dry Blades	40-41
High Speed Ultimate Blades	42
High Speed Specialty Blades	43
High Speed Turbo Blades	44-45
X-Line Turbo Blades	46
High Performance Turbo Blades	47
Specialty Turbo - G.O. Blades and Graviton Blades	48
Specialty Turbo - Demo Cut and Fiber Cement Board Blades	49
Small Diameter Blades	50-51
Dry Walk Behind Blades	52-53
Masonry Blades	54-55
Tuck Point Blades	56-57
Tile Blades	58-59
ORE PREP	
CORE PREP Products	60
CPG305 Hand Polisher	61
Polishing Pads	62-63
Cup Grinders	64-67
Floor Grinders - CPG80E, CPG100 & CPG200	68-70
Core-Lock Grinding, Grinding Inserts and Grinding Heads	71-75
CPST1415E1 Floor Stripper	76
CPS81413E1 Filodi Stripper CPS83E & CPS848G Scarifiers	77
CPS1300 Wide Grind Scarifier	79
	13
RST-CUT PRODUCTS	
CC150XL-EE First-Cut Saws	80
CC190PRO-EE First-Cut Saw	81
EXPERT First-Cut Blades	82-83
	84-85

SAWING EQUIPMENT

Tile Saws - CC600T, CC912TS, CC900TE & CC1000T	88-89
Masonry Information	90
CC300M Masonry Saw	91
CC500MXL2 Masonry Saw	92-93
CC800M Block Saw	94-95
CC1000 Mini Joint Cutting Saw	96
CC1100XL Small Joint Cutting Saw	97
CCE0900 Portable Saw	98
CC1200XL Portable Walk Behind Saw	99
CC1300XL Small Walk Behind Saw	100-101
CC1500E Modular Walk Behind Saw	102
CC1823BVXLP Propane Saw	103
CC1800XL Medium Walk Behind Saw	104-105
CC2500 Medium Walk Behind Saw	106-107
CC2525KCP Propane EFI Saw	108
CC3535JBVP Propane Saw	109
CC3500 Walk Behind Saw	110-111
CC3500E Electric Walk Behind Saw	112-113
CC4948DC Rear Pivot Saw	114-115
CC5048DC Front Pivot Saw	116-117
CC6561GK Gas Large Walk Behind Saw	118-119
CC6571D Liquid Cooled Large Diesel Walk Behind Saw	120-121
CC6774DCV Walk Behind Saw	122-123
CC7574DD-PRO In-Line Deutz Turbo Diesel Walk Behind Saw	124-125
CC7574DKV In-Line Kubota Turbo Diesel Walk Behind Saw	126-127
CC9074DCV Deep Cut Saw	128-129
CC7875DT4 EZ Rider Saw	130-131
CC8574DD Rider Saw	132-133
CC114HCS Curb Cutter Saw	134-135
C14, C14PRO & C16 Electric High Speed Hand Saws	138-139
THE CHOICE SYSTEM High Cycle Equipment - FU6D Inverter	140-141
THE CHOICE SYSTEM High Cycle Equipment	142-145
Hydraulic Hand Saws	146-147
Mini-Dragon Electric Ring Saw	148
Dragon Ring Saws - Hydraulic & Electric	149
CSH24 Chain Saw, Weka Chain Saw, CSE12 Chain Saw, Chains and Competition Chains and Bars	150-153
CC1600 Hydraulic Wall Saw	156-157
CC1600 Wall Saw Blade Guards	158-159
WSE1621 Wall Saw System	160-161
WSE2226 Walk Saw System	162-163
Hydrostress WCH17 & WCE17 Wire Saws	164
Hydrostress SB Wire Saws	165
Hydrostress CCH25 Hydraulic & THE CHOICE SYSTEM CCE25 Circular/Plunge Wire Saws	166
WS25 Wire Saw System	167
WS30-XLE High-Cycle Wire Saw	168
Wire Saw Accessories	169
WS50-XLE High-Cycle Wire Saw	170-171



CORE BORE BITS

Core Bore Bit Information	173
Hyper Core Bore Line - Hyper Bit, Mach III & Ultra White	174
Star Blue & Standard Gold Wet Bore	175
Heavy Duty Orange Wet Bore	176
Premium Black Wet Core Bore	177
Large Diameter Heavy Duty Orange & Premium Black	178-179
Professional Wet Core Bore	180
Precast Wet Core Bore	181
Turbo Wet Core Bore	182
Specialty Turbo Core Bore	183
Pro Specialty - Commander Core Bore	184
Thinwall Wet Core Bore	185
Dry Hole Saws & Dry Vacuum Core Bore	186-187
Threaded Core Bits, Barrels and Caps	188-189
Carbide Rebar, Carbide Plate Cutter & Wood Core Bore	190
Specialty Core Bore Bits - Walk Duct, Step Bits & Pancake	191-192
Expansion Adapters & Information	193
Diamond Core Bore Segments and Crowns	194-197
Core Bore Bit Information	198
Core Bore Bit Resegmenting	195





CORING EQUIPMENT

Core Rig Basics	202
M1-AA-15 Rigs	203
M-1 Core Bore Rigs	204-205
M-2 Heavy Duty Core Bore Rigs	206-207
M-3 Stair Core Bore Rigs	208-209
M-4 Portable Core Bore Rigs	210-211
M-5 Quick Disconnect Core Bore Rigs	212-213
M-5PRO Professional Quick Disconnect Core Bore Rigs	214-215
M-6 Large Hydraulic Core Bore Rigs	216-217
Hydraulic Motors and Accessories	218-219
Core Bit Troubleshooting	220
Milwaukee & Core Bore Mountable Motors	221
Weka Mountable Motors	222-223
CB215, CB515 & Weka Hand Held Motors	224-225
Core Bore Bit Adapters	226
Competition Style Drilling Adapters	227
Core Rig Masts/Columns	228
Core Bore Drilling Extensions	229
M-2 Angle Pivot Stands	230
Bit Roller Support	231
Drilling Accessories	232-237

CORE VAC

Core Vac Dust Bandits	238-239
Core Vac CV150C Hepa Wet/Dry Dust Control Vacuum	240
Core Vac CV258LC and CV258B Dust Containment Vacuums	241
Core Vac CV353B Dust Containment Vacuum	242
Core Vac CV300S Wet Slurry Vacuum	243
Core Vac CVG1-PRO Dust Containment Vacuum	244-245

CORE POWER

Hydraulic Power Information	247
Hydraulic Power Units - CP15EXL, CP18BVXL, CP20EXL, CP22HXL	248-249
Hydraulic Power Units - CP35BVXL, CP38KXL, CP30EXL, CP40EXL	250-251
Hydra-Gen CPHG173-85 Hydraulic Power System	252
CPSK Open Generator Units	253
CP54GK Power Unit	254-255
CP74D Skid Mount & CP74DDC Trailer Mounted Hydraulic Power Units	256-257
Custom Utility Truck	258-259

TYROLIT ABRASIVES TABLE OF CONTENTS



ABRASIVES

Tyrolit Abrasives Icons & Information	258
Abrasives Safety Information	259
Depressed Center Wheels - Cutting & Light Grinding	260
Comfort Start Information	261
Depressed Center Wheels - Grinding	262-264
Super-Thin Cut-Off Wheels	265
Cut-Off Wheels & Small Diameter Wheels	266
Cut-Off Wheels	267
High Speed Cut-Off Wheels with Universal Arbors	268-269
Flap Discs	270
Wire Brushes	271
Wire Wheels	272
Cups, Blocks, Stones & Grinding Wheels	273

GROOVING & GRINDING TABLE OF CONTENTS



GROOVING & GRINDING

CG1 & CG2 Mini-Groovers	276
TBG134 Bridge Deck Groover	277
PC1504 Pavement Grinder & Groover	278-279
PC4505 Pavement Grinder	280-281
PC6004EC Pavement Grinder	282-283
Barn Groover	284-285
CG3R Pavement Groover	286-287
Warranty Information	288-289

€

CATALOGS & BOOKLETS



Master Product Catalog
Full line catalog of diamond tools,
abrasives and equipment
Part # LIT0003



Price Book
List prices of all catalog products
Part # LIT0520




First-Cut Booklet
Presenting the full line of early entry
products - Update March 2020
Part # LIT0513



DP Basics Booklet
Highlighting basic products for the
Diamond Products Distributor
Part # LIT0017




Saw Lineup Booklet
Walk Behind Saws
Part # LIT0009



Training Booklet
Offering instructional information on
cutting and coring Part # LIT0009



Dust Control Products
Part # LIT0009



CORE POWER Booklet
Power Units
Part # LIT0516




Core Rig Lineup Booklet Core Rigs Part # LIT0009



High Cycle Products
Booklet
Featuring The Choice System
Part # LIT0511



Masonry & Tile Booklet
Masonry, Tile Saw and Diamond Tools
Part # LIT0514



CORE PREP
Surface Preparation Booklet
Part # LIT0517
(Available 2nd Qtr)

Check with your local sales person for copies or call customer service at 800-321-5336.

Digital copies are available on the website under /DOCUMENTATION

POINT OF PURCHASE DISPLAYS





CUSTOM MODULAR DISPLAY STANDS

Custom Is the Way to Go!

Modular Pegboard Design Lets You Pick Which Display Parts You Need For Your Products

- Abrasive Display Rack
- Core Bit Display Rack
- · Multiple Different Display Hooks
- · Header Image Sign and Sub Header Text
- · Product Description and Pricing Hooks

Header Signs, Shelving, Display Hooks, Literature Holders, Abrasive Shelf Holders and More



19" Deep



Core Bit Holder



Shelving to hold product boxes and Hand Saws



Header sign for graphic available with many options


Talk to your local Diamond **Products** Sales Person for Ordering

available in 4ft wide sections. Sticks to your existing pegboard or slat-walls. 3ft tall sections with two header give you an 8ft tall section.

Logo Header (1' tall x 4' wide) Part # GS0014A Main wall skin panel (3' tall x 4' wide) Part # GS0024A





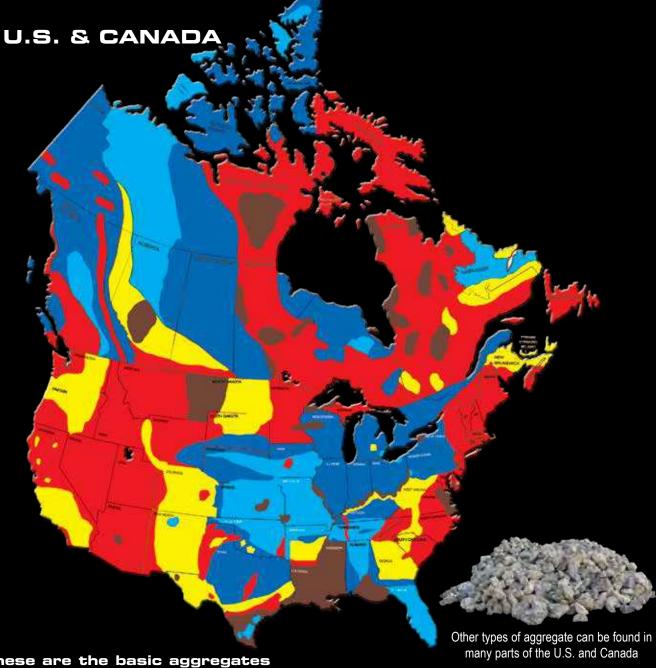

These are the basic aggregates found in the shown areas:

Soft Limestone
Sandstone
Dolomite Limestone
Siliceous
Soft Shell

SOFT

Pit Gravel
Limestone
Dolomite

SOFT

Medium
Traprock

Decomposed
Granite

Medium
Crushed
Gravel

Medium Hard

MEDIUM

Granite
Slate
Traprock
Basalt
Quartzite

MEDIUM HARD Hard Chert

Quartz


Flint Rock

Hard River Rock

HARD

DIAMOND CUTTING PROCESS




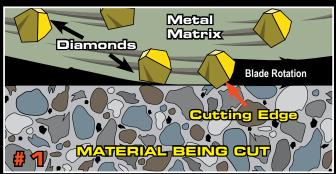


The exposed diamond crystals do the grinding work. The metal matrix or bond holds the diamond in place. Trailing behind each exposed diamond is a bond tail which helps to support the diamond. As the blade rotates through the material, the exposed surface diamonds grind the material.



After several thousand passes through the material, the exposed diamonds begin to crack and fracture. The matrix holding the diamonds also begins to wear away.

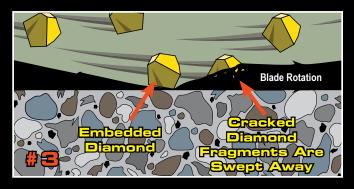

Eventually the diamond completely breaks apart and its fragments are swept away with the material it is grinding. When the blade is cooled with water this material, included with water, produces slurry.

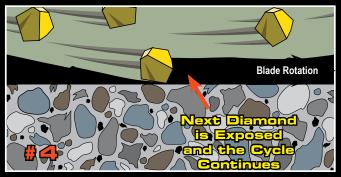

As the old diamonds are fractured and worn away they are replaced by new diamonds and the process continues until the segments are worn down to the core.

#1 Rule for Diamond Blades:
Use a Hard Bond to Cut Something Soft and
Use a Soft Bond to Cut Something Hard

DIAMOND QUALITY - YOU GET WHAT YOU PAY FOR



LOW QUALITY SYNTHETIC DIAMONDS

- · Weaker crystals with irregular shape
- Shorter life & lower cutting rates
- Lower thermal stability
- Does not handle steel & hard aggregates well
- Jagged points that break causing faster wear & lower cutting & drilling performance
- Widely used in low priced dry products


MEDIUM QUALITY SYNTHETIC DIAMONDS

- Good crystal strength & shape
- Good for sawing & drilling applications
- Good cutting speed
- Handles moderate steel & hard aggregate applications

HIGH QUALITY SYNTHETIC DIAMONDS

- Strongest crystals
- Lasts longer
- · Withstands high temperatures
- Octahedral shape for increased tool life & faster cutting
- High impact strength against steel & hard aggregate

DIAMOND BLADE INFO



(X) Slant Seg Protection

No extra charge on any blade. Used on cured concrete, asphalt and green concrete blades when undercutting conditions are occurring

EXAMPLE BOND: C56HXM



(R) Radius tection

Low cost undercut protection for average undercutting situations. **EXAMPLE BOND:** A606TRM Asphalt and Green Concrete Wet Blades



(Q) Insert Protection

Our most popular, maximum wear retardant protection used in tough undercut conditions across North America. Noted with an "I" in the part number.

EXAMPLE BOND: A606PQM sphalt and **G**r Concrete Wet Blades



To ensure maximum performance, water is required to cool these blades during the cutting process.



Dry cutting products use air to cool the blade. Intermittent cuts are required to allow proper cooling. Dry products can also be used with water.

Wet Blade Diamond Depth By Quality Grade Quality Quality Diamond Segment Grade Code Depth Height Imperial Purple Wet Cured .394 .494 Imperial Purple Asphalt/Green .312 .412 **Heavy Duty Orange** Н .250 .350 Ρ Premium Black .275 .375 Pro Blue Τ .310 .410 SP .375 .475 Super Premium Silver TH .310 .410 Pro Heavy Duty Super Heavy Duty SH .375 .475 MP .437 .537 Mega Premium Green

Diamond Depth indicates the measurement of diamonds in a segment. This measurement is different than the segment height.

Segment height is the total measurement of the diamond depth plus the backer pad.

A backer pad is the side of the segment that does not have diamonds in it to

MACHINE ICONS FOR BLADES:



Large Walk Behind Saws



Hvdraulic Hand Saws



High Speed Hand Saws



Small/Medium Walk Behind Saws <20HP



Small First-Cut Saws



Large First-Cut Saws



Wall Saws



Masonry Saws



Block Saws



Electric Circular Saws



Tile Saws



Tuck Point Grinder



Right Angle Grinder



Side Grinder



Floor Grinder

MATERIAL ICONS:


































WEBSITE & ONLINE INFO



REGISTER FOR YOUR ONLINE ACCOUNT TO GET THESE BENEFITS:

- Net pricing
- Place orders with our easy ordering system
- Order history
- · Order tracking and ship dates
- Create pricing quotes
- Download parts lists and operator manuals
- Access training information

Call 1-800-321-5336 to get your login information

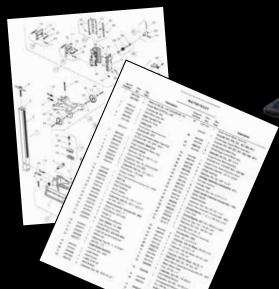

Check out the website under 'Documentation' for a full list of parts manuals.



www.diamondproducts.com

Current Company News New Product Information Product Specification Documentation Videos

Send Us Your Email Address

For the latest product updates, press releases, promotions and more.

Send To: marketing@diamondproducts.com

Diamond Products protects all contact information and will not sell, give or share any consumer information with outside sources.



FOLLOW US ONLINE:











Listen to Industry Training Talk on the DPU PODCAST!

Found on all major streaming networks where you listen to podcast.



DIAMOND BLADE CUTTING SPEEDS & SAFETY

Things to Consider About Operating Speeds & Safety

Horsepower: High horsepower may require harder bonds and higher diamond concentration. Lower horsepower may require softer bonds and lower diamond concentration.

Shaft Speed: Increasing blade shaft speed makes the diamond blade cut harder. Decreasing shaft speed makes the blade wear faster.

Material Hardness/Abrasive: Harder, less abrasive materials require slower shaft speed. Softer, more abrasive materials require faster shaft speed.

WARNING: Operating saw blades at rotational speeds greater than the maximum RPM can cause blade damage and possibly personal injury.



Walk Behind Wet

Blade Diameter	Maximum Cutting Depth	Recommended Operating Speed RPM	Maximum Safe Speed RPM
12"	3-3/4"	2900	4500
14"	4-3/4"	2900	3900
16"	5-3/4"	2600	3400
18"	6-3/4"	2600	3000
20"	7-3/4"	2450	2700
24"	9-3/4"	1950	2250
26"	10-3/4"	1950	2100
30"	11-3/4"	1650	1800
36"	14-3/4"	1300	1500
42"	17"	1050	1300
48"	20"	900	1000
54"	22-1/2"	600	700
60"	25-1/2"	540	640
72"	31-1/2"	500	500



Wall Saw Blades

Blade Diameter	Maximum Cutting Depth	Recommended Operating Speed RPM	Maximum Safe Speed RPM
18"	6-1/4"	2600	3000
20"	7-1/4"	2450	2700
24"	9-1/4"	1950	2250
30"	12-1/4"	1650	1800
36"	15-1/4"	1300	1500
42"	18-1/4"	1050	1300
48"	21-1/4"	900	1000
54"	24-1/4"	600	700
60"	27-1/4"	540	640
72"	33-1/4"	500	500



Dry Blades



Blade Diameter	Maximum Cutting Depth	Maximum Safe Speed RPM
4"	1"	18000
4-1/2"	1-1/4"	16000
5"	1-1/2"	15000
6"	2"	13000
7"	2-1/2"	11000
8"	2-5/8"	9000
9"	2-3/4	8300
10"	2-7/8"	7500
12"	3-3/4"	6300
14"	4-3/4"	5400
16"	5"	4200
18"	5-1/2"	3800



Masonry Blades




Blade Diameter	Maximum Cutting Depth	Recommended Operating Speed RPM	Maximum Safe Speed RPM
14"	5"	2550	3900
18"	7"	2300	3000
20"	8"	2300	2700
24"	10"	2250	1950



Tile Blades

Blade Diameter	Maximum Cutting Depth	Recommended Operating Speed RPM	Maximum Safe Speed RPM
4"	1"	8000	13000
4-1/2"	1-1/4"	7500	12000
5"	1-1/2"	7000	11000
6"	1-3/4"	6050	9000
7"	2-1/4"	5175	8000
8"	2-3/4"	4500	7000
9"	3-1/4"	4025	5400
10"	3-3/4"	3625	5300

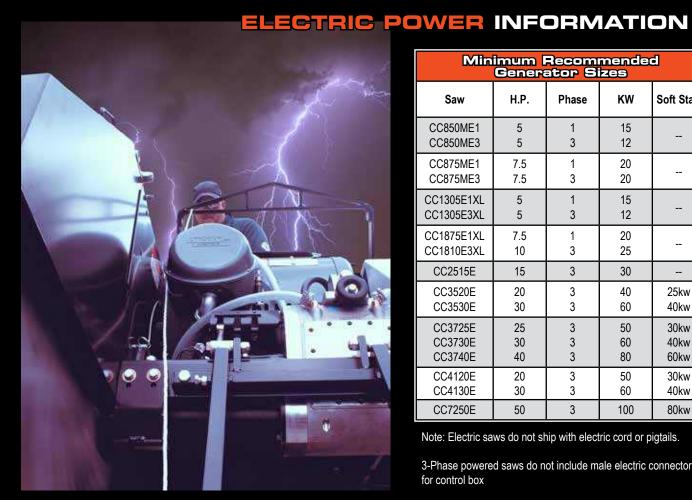

Minimum Recommended Generator Sizes						
Saw	H.P.	Phase	KW	Soft Start		
CC850ME1	5	1	15			
CC850ME3	5	3	12			
CC875ME1	7.5	1	20			
CC875ME3	7.5	3	20			
CC1305E1XL	5	1	15			
CC1305E3XL	5	3	12			
CC1875E1XL	7.5	1	20			
CC1810E3XL	10	3	25			
CC2515E	15	3	30	1		
CC3520E	20	3	40	25kw		
CC3530E	30	3	60	40kw		
CC3725E	25	3	50	30kw		
CC3730E	30	3	60	40kw		
CC3740E	40	3	80	60kw		
CC4120E	20	3	50	30kw		
CC4130E	30	3	60	40kw		
CC7250F	50	3	100	80kw		

Note: Electric saws do not ship with electric cord or pigtails.

3-Phase powered saws do not include male electric connector for control box

RECOMMENDED POWER CORD GAUGE-1 PHASE								
Horsepower	Phase	Voltage	Amps	50ft Cord	100ft Cord	150ft Cord	200ft Cord	300ft Cord
1.5	1	115	13	#12	#10	#8	1	
1.5	1	230	6	#14	#14	#12		
2	1	115	16	#10	#8	#6	ı	
2	1	230	8	#14	#14	#12		
2.5	1	115	21	#10	#8	#6	ı	
2.5	1	230	11	#14	#12	#10	-	
5	1	230	23	#10	#8	#6	#6	#4
7.5	1	230	33	#8	#8	#6	#4	#2

CAUTION: Use of a wire gauge that is too small will cause loss of power or overheating and will damage the electric motor.

	RECC	MMENI	DED PO	WER CO	rd Gal	JGE-3 PI	HASE	
Horsepower	Phase	Voltage	Amps	50ft Cord	100ft Cord	150ft Cord	200ft Cord	300ft Cord
5	3	230	12	#14	#12	#10	#8	#6
5	3	460	6	#14	#14	#14	#14	#12
7.5	3	230	17	#12	#10	#8	#6	#6
10	3	230	24	#10	#8	#6	#6	#4
10	3	460	12	#14	#14	#12	#12	#10
15	3	230	36	#8	#6	#6	#4	#2
15	3	460	18	#12	#12	#12	#10	#8
20	3	230	52	#6	#6	#4	#2	N/A
20	3	460	26	#10	#10	#8	#8	#6
25	3	230	58	#6	#4	#4	#2	N/A
25	3	460	29	#10	#10	#8	#8	#6
30	3	460	37	#8	#8	#8	#6	#4
40	3	460	48	#6	#6	#6	#6	#4
50	3	460	62	#4	#4	#4	#4	#2



IMPERIAL PURPLE CURED CONCRETE BLADES





1" arbor with drive pin hole standard.

Imperial Purple-I

- .394" Diamond Depth
- Economical blades that work well for contractors who don't have a heavy volume of cutting to do.
- · Delivers the speed and convenience of a diamond blade compared with conventional abrasive blades that require frequent blade changes.
- Basic quality diamond and economical cutting value.





To ensure maximum performance, water is required to cool these blades during the cutting process.

AGGREGATE HARDNESS

MEDIUM AGGREGATE

Imperial Purple Specifications for Light to Medium Reinforced Concrete C2650I





HEAVY DUTY ORANGE CURED CONCRETE BLADES

	TY ORANGE
CURED CONC	RETE BLADES
SIZE	SIZE
10" x .110	24" x .140
10" x .125	24" x .155
12" x .110	24" x .165
12" x .125	24" x .175
12" x .140	24" x .187
12" x .155	24" x .210
12" x .187	24" x .250
12" x .250	26" x .155
12" x .375	26" x .165
14" x .110	26" x .175
14" x .125	26" x .187
14" x .140	26" x .250
14" x .155	28" x .187
14" x .187	30" x .175
14" x .250	30" x .187
14" x .375	30" x .210
16" x .125	30" x .250
16" x .140	32" x .175
16" x .155	32" x .187
16" x .187	32" x .210
16" x .250	32" x .250
18" x .125	36" x .175
18" x .140	36" x .187
18" x .155	36" x .210
18" x .165	36" x .250
18" x .175	42" x .187
18" x .187	42" x .210
18" x .210	42" x .220
18" x .250	48" x .210
20" x .125	48" x .250
20" x .140	54" x .220
20" x .155	60" x .220
20" x .165	
20" x .187	
20" x .250	



Heavy Duty Orange-H

· .250" Diamond Depth

Pro Heavy Duty-TH

- .310" Diamond Depth
- · Taller segment, high diamond concentration

Super Heavy Duty-SH

- .375" Diamond Depth
- Even taller segment and higher diamond concentration
- Fast cutting blade that works well with a wide variety of high or low HP saws.
- · Combines long life performance while maximizing your blade dollars.

HEAVY	HEAVY DUTY ORANGE Concrete Specification Chart					
Aggregate Hardness	SOFT	MEDIUM SOFT	MEDIUM	MEDIUM HARD	HARD	
Reinforcement		Light to Medium Reinforcement				
Bond Spec	C62H	C60H	C56H	C52H	C50WH	
Reinforcement		Heavy Reinforcement				
Bond Spec	C56H	C56H	C52H	C51WH	C45H	
Aggregate Type	Soft Limestone Sandstone Dolomite Limestone Siliceous Soft Shell	Pit Gravel Limestone Dolomite	Medium Hard River Rock Medium Traprock Decomposed Granite Crushed Gravel	Granite Slate Traprock Basalt Quartzite	Hard Chert Quartz Flint Rock Hard River Rock	

See page 10 for color coded aggregate map of the U.S. and Canada

1" arbor with drive pin hole standard. Custom arbor sizes/types are available.

When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

NO CHARGE FOR 'X' SLANT SEG WEAR PROTECTION OR CUSTOM **BOLT PATTERNS**

(Example: LOUIE or ROGER bolt pattern)



To ensure maximum performance, water is required to cool these blades during the cutting process.



For use on walk behind saws.

PREMIUM BLACK CURED CONCRETE BLADES







Premium Black-P

- .275" Diamond Depth
- A high quality blade that delivers long lasting, fast cutting performance.
- Designed for contractors who demand maximum efficiency and value.

1" arbor with drive pin hole standard. Custom arbor sizes/types are available.

When ordering, please specify arbor size/type if different from 1".

NO CHARGE FOR 'X' SLANT SEG WEAR PROTECTION OR CUSTOM BOLT PATTERNS

(Example: LOUIE or ROGER bolt pattern)





To ensure maximum performance, water is required to cool these blades during the cutting process.

	ACK CURED
	DES SIZE
SIZE	SIZE
10" x .110	24" x .140
10" x .125	24" x .155
12" x .110	24" x .165
12" x .125	24" x .175
12" x .140	24" x .187
12" x .155	24" x .210
12" x .187	24" x .250
12" x .250	26" x .155
12" x .375	26" x .165
14" x .110	26" x .175
14" x .125	26" x .187
14" x .140	26" x .250
14" x .155	28" x .187
14" x .187	30" x .175
14" x .250	30" x .187
14" x .375	30" x .210
16" x .125	30" x .250
16" x .140	32" x .175
16" x .155	32" x .187
16" x .187	32" x .210
16" x .250	32" x .250
18" x .125	36" x .175
18" x .140	36" x .187
18" x .155	36" x .210
18" x .165	36" x .250
18" x .175	42" x .187
18" x .187	42" x .210
18" x .210	42" x .220
18" x .250	48" x .210
20" x .125	48" x .250
20" x .140	54" x .220
20" x .155	60" x .220
20" x .165	
20" x .187	
20" x .250	

PRE	MUM	BLA	Concrete S	Specification	n Chart		
Aggregate Hardness	SOFT	MEDIUM SOFT	MEDIUM	MEDIUM HARD	HARD		
Reinforcement	L	Light to Medium Reinforcement					
Bond Spec	C62P	C60P	C56P	C52P	C50WP		
Reinforcement		Heavy Reinforcement					
Bond Spec	C56P	C56P	C52P	C51WP	C45P		
Aggregate Type	Soft Limestone Sandstone Dolomite Limestone Siliceous Soft Shell	Pit Gravel Limestone Dolomite	Medium Hard River Rock Medium Traprock Decomposed Granite Crushed Gravel	Granite Slate Traprock Basalt Quartzite	Hard Chert Quartz Flint Rock Hard River Rock		

^{*} Additional blade sizes available upon request.







PRO BLUE CU	RED BLADES
SIZE	SIZE
10" x .110	24" x .140
10" x .125	24" x .155
12" x .110	24" x .165
12" x .125	24" x .175
12" x .140	24" x .187
12" x .155	24" x .210
12" x .187	24" x .250
12" x .250	26" x .155
12" x .375	26" x .165
14" x .110	26" x .175
14" x .125	26" x .187
14" x .140	26" x .250
14" x .155	28" x .187
14" x .187	30" x .175
14" x .250	30" x .187
14" x .375	30" x .210
16" x .125	30" x .250
16" x .140	32" x .175
16" x .155	32" x .187
16" x .187	32" x .210
16" x .250	32" x .250
18" x .125	36" x .175
18" x .140	36" x .187
18" x .155	36" x .210
18" x .165	36" x .250
18" x .175	42" x .187
18" x .187	42" x .210
18" x .210	42" x .220
18" x .250	48" x .210
20" x .125	48" x .250
20" x .140	54" x .220
20" x .155	60" x .220
20" x .165	
20" x .187	
20" x .250	

PRO BLUE Concrete Specification Chart						
Aggregate Hardness	SOFT	MEDIUM SOFT	MEDIUM	MEDIUM HARD	HARD	
Reinforcement	Lie	Light to Medium Reinforcement				
Bond Spec	C62T	C60T	C56T	C52T	C50WT	
Reinforcement		Heav	y Reinforce	ment		
Bond Spec	C56T	C56T	C52T	C51WT	C45T	
Aggregate Type	Soft Limestone Sandstone Dolomite Limestone Siliceous Soft Shell	Pit Gravel Limestone Dolomite	Medium Hard River Rock Medium Traprock Decomposed Granite Crushed Gravel	Granite Slate Traprock Basalt Quartzite	Hard Chert Quartz Flint Rock Hard River Rock	

See page 10 for color coded aggregate map of the U.S. and Canada



Professional Blue-T

• .310" Diamond Depth

Professional Blue Plus-T+

- .310" Diamond Depth
- · Additional diamond concentration for longer life
- · Same high quality as our Premium Black blade with a taller segment to lower your cutting costs.
- · Made for 35HP saws and larger

1" arbor with drive pin hole standard. Custom arbor sizes/types are available. When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

NO CHARGE FOR 'X' SLANT SEG AR PROTECTION OR CUSTOM **BOLT PATTERNS**

(Example: LOUIE or ROGER bolt pattern)





To ensure maximum performance, water is required to cool these blades during the cutting process.



SUPER PREMIUM SILVER CURED CONCRETE BLADES



SUPER PREMIUM SILVER





Super Premium Silver-SP

• .375" Diamond Depth

Super Premium Silver Plus-SP+

- · .375" Diamond Depth
- · Additional diamond concentration for longer life
- · Especially well suited for sawing in tough applications.

1" arbor with drive pin hole standard. Custom arbor sizes/types are available. When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

NO CHARGE FOR 'X' SLANT SEG WEAR PROTECTION OR CUSTOM BOLT PATTERNS

(Example: LOUIE or ROGER bolt pattern)





To ensure maximum performance, water is required to cool these blades during the cutting process.

	BLADES
SIZE	SIZE
10" x .110	24" x .140
10" x .125	24" x .155
12" x .110	24" x .165
12" x .125	24" x .175
12" x .140	24" x .187
12" x .155	24" x .210
12" x .187	24" x .250
12" x .250	26" x .155
12" x .375	26" x .165
14" x .110	26" x .175
14" x .125	26" x .187
14" x .140	26" x .250
14" x .155	28" x .187
14" x .187	30" x .175
14" x .250	30" x .187
14" x .375	30" x .210
16" x .125	30" x .250
16" x .140	32" x .175
16" x .155	32" x .210
16" x .187	32" x .250
16" x .250	36" x .175
18" x .125	36" x .187
18" x .140	36" x .210
18" x .155	36" x .250
18" x .165	42" x .187
18" x .175	42" x .210
18" x .187	42" x .220
18" x .210	48" x .210
18" x .250	48" x .250
20" x .125	54" x .220
20" x .140	60" x .220
20" x .155	
20" x .165	
20" x .187	
20" x .250	

SUPER	PREMI	UM S	ILVER Cond	crete Specifi	cation Chart
Aggregate Hardness	SOFT	MEDIUM SOFT	MEDIUM	MEDIUM HARD	HARD
Reinforcement	L	ight to I	Medium Reii	nforceme	nt
Bond Spec	C62SP C60SP C56SP		C52SP	C50WSP	
Reinforcement		Heavy Reinforcement			
Bond Spec	C56SP	C56SP	C56SP C52SP C51WSP		
Aggregate Type	Soft Limestone Sandstone Dolomite Limestone Siliceous Soft Shell	Pit Gravel Limestone Dolomite	Medium Hard River Rock Medium Traprock Decomposed Granite Crushed Gravel	Granite Slate Traprock Basalt Quartzite	Hard Chert Quartz Flint Rock Hard River Rock





MEGA PREMIUM

CURED CONCRETE BLADES

	IIUM GREEN BLADES
SIZE	SIZE
12" x .110	24" x .140
12" x .125	24" x .155
12" x .155	24" x .165
12" x .187	24" x .175
12" x .250	24" x .187
12" x .375	24" x .210
14" x .110	24" x .250
14" x .125	26" x .155
14" x .140	26" x .165
14" x .155	26" x .175
14" x .187	26" x .187
14" x .250	26" x .250
14" x .375	28" x .187
16" x .125	30" x .175
16" x .140	30" x .187
16" x .155	30" x .210
16" x .187	30" x .250
18" x .125	32" x .175
18" x .140	36" x .175
18" x .155	36" x .187
18" x .165	42" x .187
18" x .175	42" x .210
18" x .187	42" x .220
18" x .210	48" x .210
18" x .250	48" x .250
20" x .125	54" x .220
20" x .140	
20" x .155	
20" x .165	
20" x .187	
20" x .250	



- .437" Diamond Depth
- · Additional diamond concentration for longer life
- · Extremely long life blade especially good for hard aggregates.
- · Delivers the lowest diamond tool cost per inch foot in the industry.

For use on

1" arbor with drive pin hole standard. Custom arbor sizes/types are available. When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

NO CHARGE FOR 'X' SLANT SEG **WEAR PROTECTION OR CUSTOM BOLT PATTERNS**

(Example: LOUIE or ROGER bolt pattern)





To ensure maximum performance, water is required to cool these blades during the cutting process.

MEGA PREMIUM GREEN Concrete Specification Chart					
Aggregate Hardness	SOFT	MEDIUM SOFT	MEDIUM	MEDIUM HARD	HARD
Reinforcement			Medium Rei	nforceme	nt
Bond Spec	C62MP	C60MP	C56MP	C52MP	C50WMP
Reinforcement	Heavy Reinforcement				
Bond Spec	C56MP	C56MP	C52MP	C51WMP	C45MP
Aggregate Type	Soft Limestone Sandstone Dolomite Limestone Siliceous	Pit Gravel Limestone Dolomite	Medium Hard River Rock Medium Traprock Decomposed Granite Crushed Gravel	Granite Slate Traprock Basalt Quartzite	Hard Chert Quartz Flint Rock Hard River Rock

GIGA TITANIUM CURED CONCRETE BLADES



GIGA TITANIUM CURED





GIGA IIIAN	
CONCRET	E BLADES
SIZE	SIZE
12" x .125	24" x .155
12" x .140	24" x .165
12" x .155	24" x .175
12" x .187	24" x .187
14" x .110	24" x .210
14" x .125	24" x .250
14" x .140	26" x .155
14" x .155	26" x .165
14" x .187	26" x .175
14" x .250	26" x .187
16" x .125	26" x .250
16" x .140	28" x .187
16" x .155	30" x .175
16" x .187	30" x .187
16" x .250	30" x .210
18" x .125	36" x .175
18" x .140	36" x .187
18" x .155	36" x .210
18" x .165	36" x .250
18" x .175	42" x .187
18" x .187	42" x .210
18" x .210	42" x .220
20" x .125	48" x .210
20" x .140	-
20" x .155	-
20" x .165	-
20" x .187	-

Giga Premium Titanium-GP

· .500" Diamond Depth

Giga Premium Plus Titanium-GP+

- · .500" Diamond Depth
- · Additional diamond concentration for longer life

Giga Supreme Titanium-GU

- · .500" Diamond Depth
- · Ultra-High diamond concentration for maximum life
- Especially well suited for sawing in tough applications.

1" arbor with drive pin hole standard.

Custom arbor sizes/types are available.

When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

NO CHARGE FOR 'X' SLANT SEG WEAR PROTECTION OR CUSTOM BOLT PATTERNS

(Example: LOUIE or ROGER bolt pattern)





To ensure maximum performance, water is required to cool these blades during the cutting process.

GIGA PREMIUM TITANIUM Concrete Specification Chart					
Aggregate Hardness	SOFT	MEDIUM SOFT	MEDIUM	MEDIUM HARD	HARD
Reinforcement	I	ight to	Medium Rei	nforcemer	nt
Bond Spec	C62GP	C60GP	C56GP	C52GP	C50WGP
Reinforcement		Heavy Reinforcement			
Bond Spec	C56GP	C56GP C52GP C		C51WGP	C45GP
Aggregate Type	Soft Limestone Sandstone Dolomite Limestone Siliceous Soft Shell	Pit Gravel Limestone Dolomite	Medium Hard River Rock Medium Traprock Decomposed Granite Crushed Gravel	Granite Slate Traprock Basalt Quartzite	Hard Chert Quartz Flint Rock Hard River Rock



IMPERIAL PURPLE ASPHALT/ GREEN CONCRETE/ASPHALT OVER CONCRETE WET BLADES

SIZE	PART #	CAT#
14" x .140	AI14140XM	36821
18" x .140	AI18140XM	36822
20" x .140	AI20140XM	36823
24" x .155	AI24155XM	36824
26" x .165	Al26165XM	36825
30" x .187	Al30187XM	36828
36" x .187	Al36187XM	36831





Imperial Purple-I

- .312" Diamond Depth
- Delivers the speed and convenience of a diamond blade compared with ab. sive blades that require frequent blade changes.
- · Basic quality diamond and economical cutting value

AGGREGATE HARDNESS MEDIUM AGGREGATE ASPHALT/ **GREEN CONCRETE**

Imperial Purple Specification A60001

See page 10 for color coded aggregate map of the U.S. and Canada





To ensure maximum performance, water is required to cool these blades during the cutting process.

ALT/GREEN/OVERLAY Blades



HEAVY DUTY ORANGE ASPHALT/GREEN/OVERLAY BLADES









HEAVY DUTY ORANGE ASPHALT-GREEN CONCRETE & ASPHALT OVER CONCRETE WET BLADES

SIZE	
12" x .125	
12" x .140	
12" x .187	
12" x .250	
12" x .375	
14" x .125	
14" x .140	
14" x .187	
14" x .250	
14" x .375	
16" x .125	
16" x .140	
18" x .125	
18" x .140	
18" x .155	
18" x .175	
18" x .187	
18" x .250	
20" x .125	
20" x .140	
20" x .155	
20" x .165	
24" x .155	
24" x .175	
24" x .187	
26" x .155	
26" x .187	
30" x .175	
30" x .187	
32" x .187	
36" x .175	
36" x .187	

Heavy Duty Orange-H

- · .250" Diamond Depth
- · Fast cutting blade that works well with a wide variety of high or low HP saws.
- Combines long life performance while maximizing your blade dollars.

1" arbor with drive pin hole standard. Custom arbor sizes/types are available.

When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

When determining an Asphalt, Green Concrete or Asphalt over Concrete specification use this formula:

 $\dot{\text{Blade}}$ type A, G or AC, (spec #) (grade) optional wear protection) M

A = Asphalt, G = Green Concrete, AC = Asphalt over Concrete Example: A606TRM or AC62SWSPQM

Low HP = 18 HP or lower High HP = 20 HP or higher

See page 12 for undercut protection options





To ensure maximum performance, water is required to cool these blades during the cutting process.

If you need a size or spec for something not shown, please call customer service at (800) 321-5336.

SOFT	MED. SOFT	MEDIUM	MED. HARD	HARD
H.D. ORAN	NGE Cutting Asp	halt with Low	HP Saw Specifi	cations
A635H	A615H	A606H	A605H	A350H
H.D. ORANG	GE Cutting Asp	halt with High	HP Saw Speci	fications
A665H	A635H	A630H	A606H	A605H
H.D. ORANGE	Cutting Green (Concrete with L	ow HP Saw Sp	ecifications
G670H	G660H	G606H	G606H	G605H
H.D. ORANGE	Cutting Green (Concrete with H	ligh HP Saw Sp	ecifications
G670H	G660H	G606H	G606H	G605H
H.D. ORANGE Cu	itting Asphalt O	er Concrete wit	h Low HP Saw S	pecifications
AC64DWH	AC64DWH	AC64DWH	AC62DWH	AC62DWH
H.D. ORANGE Cu	itting Asphalt Ov	er Concrete wit	h High HP Saw S	specifications
AC64DWH	AC64DWH	AC64DWH	AC62DWH	AC62DWH







PREMIUM BLACK **ASPHALT/GREEN/OVERLAY BLADES**



OVER CONCRETE WET BLADES
SIZE
12" x .125
12" x .140
12" x .187
12" x .250
12" x .375
14" x .125
14" x .140
14" x .187
14" x .250
14" x .375
16" x .125
16" x .140
18" x .125
18" x .140
18" x .155
18" x .175
18" x .187
18" x .250
20" x .125
20" x .140
20" x .155
20" x .165
24" x .155
24" x .175
24" x .187
26" x .155
26" x .187
30" x .175
30" x .187
32" x .187
36" x .175
36" x .187

See page 12 for undercut protection options



Premium Black-P

- · .275" Diamond Depth
- · A high quality blade that delivers long lasting, fast cutting performance.
- · Designed for contractors who demand maximum efficiency and value.

1" arbor with drive pin hole standard.

Custom arbor sizes/types are available.

When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

When determining an Asphalt, Green Concrete or Asphalt over Concrete specification use this formula:

Blade type A, G or AC, (spec #) (grade) optional wear protection) M

A = Asphalt, G = Green Concrete, AC = Asphalt over Concrete Example: A606TRM or AC62SWSPQM

Low HP = 18 HP or lower High HP = 20 HP or higher

SOFT MED. SOFT **MEDIUM** MED. HARD PREMIUM BLACK Cutting Asphalt with Low HP Saw Specifications A615P A606P A605P A350P PREMIUM BLACK Cutting Asphalt with High HP Saw Specifications A635P A630P A606P A605P PREMIUM BLACK Cutting Green Concrete with Low HP Saw Specifications G670P G606P G605P G660P G606P PREMIUM BLACK Cutting Green Concrete with High HP Saw Specifications G660P G606P G605P PREMIUM BLACK Cutting Asphalt Over Concrete with Low HP Saw Specifications AC64DWP AC64DWP AC62DWP AC62DWP PREMIUM BLACK Cutting Asphalt Over Concrete with High HP Saw Specifications AC64DWP AC64DWP AC62DWP AC62DWP





To ensure maximum performance, water is required to cool these blades during the cutting process.

If you need a size or spec for something not shown, please call customer service at (800) 321-5336.



PRO BLUE ASPHALT/GREEN/OVERLAY BLADES





PRO BLUE ASPHALT/ GREEN CONCRETE ASPHALT OVER





Professional Blue-T

- · .310" Diamond Depth
- · Same high quality as Premium Black with a taller segment to lower your cutting cost.
- · Best used with 35HP and up

1" arbor with drive pin hole standard. Custom arbor sizes/types are available.

When ordering, please specify arbor size/type if different from 1".


* Additional blade sizes available upon request.

When determining an Asphalt, Green Concrete or Asphalt over Concrete specification use this formula:

Blade type A, G or AC, (spec #) (grade) optional wear protection) M

A = Asphalt, G = Green Concrete, AC = Asphalt over Concrete Example: A606TRM or AC62SWSPQM

Low HP = 18 HP or lower High HP = 20 HP or higher

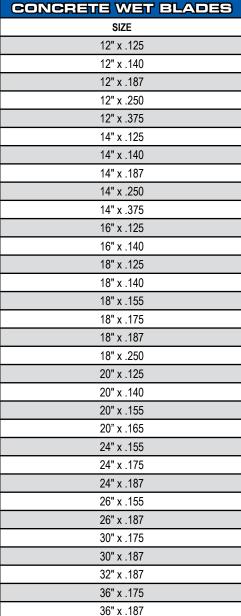

See page 12 for undercut protection options





To ensure maximum performance, water is required to cool these blades during the cutting process.

If you need a size or spec for something not shown, please call customer service at (800) 321-5336.

SOFT	MED. SOFT	MEDIUM	MED. HARD	HARD
PRO B	LUE Cutting Asp	halt with Low	HP Saw Specific	ations
A635T	A615T	A606T	A605T	A350HT
PRO B	LUE Cutting Aspl	halt with High	HP Saw Specific	ations
A665T	A635T	A630T	A606T	A605T
PRO BLUE	Cutting Green C	oncrete with	Low HP Saw Spe	cifications
G670T	G660T	G606T	G606T	G605T
PRO BLUE	Cutting Green C	oncrete with	High HP Saw Spe	cifications
G670T	G660T	G606T	G606T	G605T
PRO BLUE Cu	tting Asphalt Ov	er Concrete w	ith Low HP Saw	Specifications
			AC62DWT	
			ith High HP Saw	
AC64DWT	AC64DWT	AC64DWT	AC62DWT	AC62DWT







SUPER PREMIUM SILVE ASPHALT/GREEN/OVERLAY BLADES



SUPER PREMIUM SILVER ASPHALT/GREEN ASPHALT OVER CONCRETE WET BLADES SIZE 12" x .125 12" x .140 12" x .187 14" x .125 14" x .140 14" x .187 14" x .250 14" x .375 16" x .125 16" x .140 18" x .125 18" x .140 18" x .155 18" x .175 18" x .187 18" x .250 20" x .125 20" x .140 20" x .155 20" x .165 24" x .155 24" x .187 26" x .155 26" x .187 30" x .175 30" x .187 36" x .187

See page 12 for undercut protection options



Super Premium Silver-SP

- .375" Diamond Depth
- · A high quality long life blade.
- · Made with high diamond concentration.
- · Especially well suited for sawing in tough applications.

1" arbor with drive pin hole standard.

Custom arbor sizes/types are available.

When ordering, please specify arbor size/type if different from 1".

* Additional blade sizes available upon request.

When determining an Asphalt, Green Concrete or Asphalt over Concrete specification use this formula:

Blade type A, G or AC, (spec #) (grade) optional wear protection) M

A = Asphalt, G = Green Concrete, AC = Asphalt over Concrete Example: A606TRM or AC62SWSPQM

Low HP = 18 HP or lower High HP = 20 HP or higher

SOFT MED. SOFT **MEDIUM** MED. HARD **HARD** SP SILVER Cutting Asphalt with Low HP Saw Specifications A615SP **A606SP** A605SP SP SILVER Cutting Asphalt with High HP Saw Specifications A635SP A630SP SP SILVER Cutting Green Concrete with Low HP Saw Specifications G670SP G660SP G606SP G605SP SP SILVER Cutting Green Concrete with High HP Saw Specifications G660SP G606SP G606SP SP SILVER Cutting Asphalt Over Concrete with Low HP Saw Specifications
AC64DWSP AC64DWSP AC62DWSP AC62DWSP SP SILVER Cutting Asphalt Over Concrete with High HP Saw Specifications AC64DWSP AC64DWSP AC64DWSP AC62DWSP AC62DWSP





To ensure maximum performance, water is required to cool these blades during the cutting process.

If you need a size or spec for something not shown, please call customer service at (800) 321-5336.

WALL SAW & HAND SAW BLADES













40mm Straight Seg





20mm Split Segment





· Original segment for standard cutting

and long life

· For fast cutting and enhanced blade life

- Give less resistance for faster and more economical cutting.
- Keeps segments cooler in higher steel applications.
- Not available on U-Gullet Core

This 'horseshoe' shaped design provides faster cutting speeds and long life and also helps reduce segment loss

Our hand saw blades have multiple unique segment designs to choose from ensuring top performance, speed and life when cutting. All hand saw blades 20" and larger come standard with a 1" arbor and a LYFC bolt pattern. Other flush cut configurations are available upon request. Blades are available in diameters from 1" to 24". Custom sizes are available upon request.

Bond Specification Chart Material Sandwich Non-Sandwich W212 Fast cutting hard aggregate W20 General purpose hard aggregate W323 W2033 Fast cutting and long life W3A3 W33 Fast cutting general purpose W3342 W434 Fast cutting general purpose-extended life in W41 heavy steel and hard aggregate W535 W42 General purpose medium aggregate

U-GULLET CORE STYLE · Holds side clearances better · Cuts faster due to less surface to surface contact

When creating a specification for hand saw blades, use this formula:

When ordering 40mm blades add M to end of part number: (WP24187M) When ordering 20mm blades add MM to end of part number. (WP24187MM)

When ordering 9mm blades add M9 to end of part number (WP16187M9)

When ordering 16mm blades add M16 to end of part number. (WP24187M16)

W (spec) (grade) -20, -16, -9 or M (Example: W535P-20)

- · Removes slurry more efficiently
- Just order your normal blade(s) and add a 'U' to the end of the part number or bond specification

Sandwich Seg Wall Saw Blades Faster cutting-blades maintain better clearance for their full life

worn in use by preventing breakdown due to binding and lack

· Not available in 20mm Split Segment Style

and better tracking in the cut

of side clearance



Long life general purpose

Long life soft aggregate, brick & block

To ensure maximum performance, water is required to cool these blades during the cutting process.

Diamond Depths				
Quality Grade	40mm	20mm	16mm	9mm
Premium Black (P)	.250	.310	.310	.310
Professional Blue (T)	.310	.375	.375	.375
Super Premium Silver (SP)	.375	.437	.450	.450

W545

W5A5

• Longer life-sandwich segs help keep blades that are 75%

W50

High Diamond Concentration Low Diamond Concentration




For use on wall saws or hydraulic hand saws



HAND SAW Blades

HYDRAULIC HAND SAW BLADES



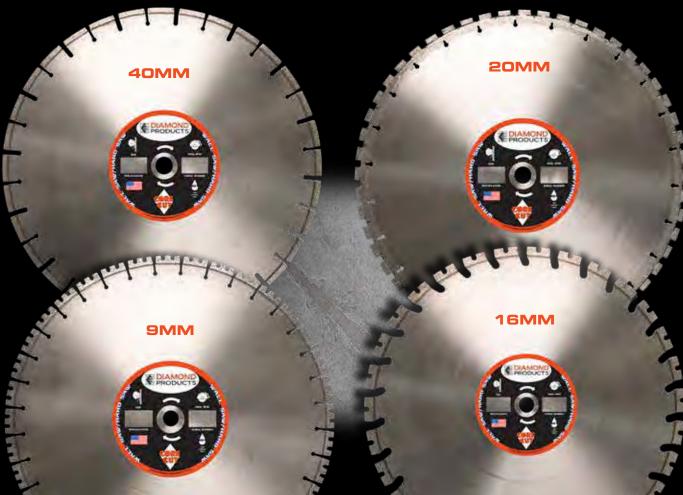

PREMIUM BLACK
Size
14" x .125
14" x .140
16" x .125
16" x .140
18" x .125
18" x .187
18" x .210
18" x .220
18" x .250
20" x .125
20" x .140
20" x .155
20" x .165
20" x .187
20" x .210
20-5/8" x .125
20-5/8" x .140
24" x .140

PRO BLUE
l
Size
14" x .125
14" x .140
16" x .125
16" x .140
18" x .125
18" x .187
18" x .210
18" x .220
18" x .250
20" x .125
20" x .140
20" x .155
20" x .165
20" x .187
20" x .210
20-5/8" x .125
20-5/8" x .140
24" x .140

SUPER PREMIUM SILVER
Size
14" x .125
14" x .140
16" x .125
16" x .140
18" x .125
18" x .187
18" x .210
18" x .220
18" x .250
20" x .125
20" x .140
20" x .155
20" x .165
20" x .187
20" x .210
20-5/8" x .125
20-5/8" x .140
24" x .140





WALL SAW BLADES

PREMIUM BLACK
Size
18" x .125
18" x .187
18" x .210
18" x .220
18" x .250
20" x .125
20" x .140
20" x .155
20" x .165
20" x .187
20" x .210
20-5/8" x .125
20-5/8" x .140
24" x .140
24" x .187
24" x .210
24" x .220
24" x .250
26" x .187
26" x .210
30" x .175
30" x .187
30" x .210
30" x .220
30" x .250
32" x .175
32" x .187
32" x .210
36" x .175
36" x .187
36" x .210
36" x .220
36" x .250
42" x .187
42" x .210
42" x .250
48" x .210
48" x .250
54" x .210
54" x .250
60" x .220

PRO BLUE
Size
18" x .125
18" x .187
18" x .210
18" x .220
18" x .250
20" x .125
20" x .140
20" x .155
20" x .165
20" x .187
20" x .210
20-5/8" x .125
20-5/8" x .140
24" x .140
24" x .187
24" x .210
24" x .220
24" x .250
26" x .187
26" x .210
30" x .175
30" x .187
30" x .210
30" x .220
30" x .250
32" x .175
32" x .187
32" x .210
36" x .175
36" x .187
36" x .210
36" x .220
36" x .250
42" x .187
42" x .210
42" x .250
48" x .210
48" x .250
54" x .210
54" x .250
60" x .220
72" x .220

	SUPER PREMIUM SILVER
	Size
	18" x .125
	18" x .187
	18" x .210
	18" x .220
	18" x .250
	20" x .125
	20" x .140
Į	20" x .155
	20" x .165
	20" x .187
	20" x .210
	20-5/8" x .125
	20-5/8" x .140
	24" x .140
	24" x .187
	24" x .210
	24" x .220
	24" x .250
	26" x .187
	26" x .210
	30" x .175
Į	30" x .187
Į	30" x .210
	30" x .220
ļ	30" x .250
Į	32" x .175
	32" x .187
	32" x .210
	36" x .175
	36" x .187
	36" x .210
ĺ	36" x .220
	36" x .250
l	42" x .187
l	42" x .210
	42" x .250
	48" x .210
	48" x .250
ĺ	54" x .210
Î	54" x .250
ĺ	60" x .220

U-Gullet core is not available for 20mm blades. U-Gullet core is available for 40mm blades upon request.





72" x .220

To ensure maximum performance, water is required to cool these blades during the cutting process.

When creating a <u>specification</u> for hand saw blades, use this formula: W (spec) (grade) -20, -16, -9 or M (Example: W535P-20) When ordering 40mm blades add M to end of <u>part number:</u> (WP24187M) When ordering 20mm blades add MM to end of <u>part number.</u> (WP24187MM) When ordering 16mm blades add M16 to end of <u>part number.</u> (WP24187M16) When ordering 9mm blades add M9 to end of <u>part number.</u> (WP16187M9)

WALL SAW BLADES



Bond Specification Chart			
Material	Sandwich	Non-Sandwich	
Fast cutting hard aggregate	W212	W20	
General purpose hard aggregate	W323	W2033	
Fast cutting and long life	W3A3	W33	
Fast cutting general purpose	W434	W3342	
Fast cutting general purpose-extended life in heavy steel and hard aggregate		W41	
General purpose medium aggregate	W535	W42	
Long life general purpose	W545		
Long life soft aggregate, brick & block	W5A5	W50	









To ensure maximum performance, water is required to cool these blades during the cutting process.



CRACK SAW & LOOP BLADES



Random Crack Saw Blade Specifications Aggregate Type Green Concrete Hard to Medium Hard G64DW C56 Soft G606DW C60

Random Crack Saw Blades

 Random Crack Saw Blades are used to prepare random cracks for resealing with joint sealant material

Available Quality Grades:

Heavy Duty Orange (H) (.250" diamond depth) Premium Black (P) (.275" diamond depth)

RANDOM CRACK SAW BLADES			
SIZE*	H.D. Orange (H)Part #	Premium Black (P) Part #	
5" x .250	CCH05250	CCP05250	
5" x .375	CCH05375	CCP05375	
5" x .500	CCH05500	CCP05500	
6" x .250	CCH06250	CCP06250	
6" x .375	CCH06375	CCP06375	
6" x .500	CCH06500	CCP06500	
7" x .250	CCH07250	CCP07250	
7" x .375	CCH07375	CCP07375	
7" x .500	CCH07500	CCP07500	
8" x .250	CCH08250	CCP08250	
8" x .375	CCH08375	CCP08375	
8" x .500	CCH08500	CCP08500	

All crack saw blades can be either laser welded or silver brazed upon request. Undercut protection may be added to any random crack saw blade.

* Additional blade sizes are available upon request.



LOOP BLADE PROFILE VIEW

Traffic Loop Blades

Disc style core for use on competition style loop saws. Uses asphalt or concrete wet blade specifications-give us your application and we'll determine the blade for you. Used for cutting wide joints for laying electric wire to activate traffic signals.

Typical grades include:

Premium Black (P) (.275" diamond depth) Professional Blue (T) (.310" diamond depth)

TRAFFIC LOOP BLADES		
SIZE	Premium Black (P) Part #	Pro Blue (T) Part #
14" x .375	CLP14375	CLT14375
18" x .375	CLP18375	



To ensure maximum performance, water is required to cool these blades during the cutting process.

BEVEL & REFRACTORY BLADES





Bevel Blades

- Bevel wet blades are used in pairs with each blade having a 45 degree angle giving the user a 90 degree bevel in the cut.
- · Blades must be ordered in pairs
- Bevel blades can be redressed to maintain chamfer for angle
- Diamond depth varies based on quality grade, thickness and angle thickness

BEVEL BLADES			
SIZE	H.D. Part #	Premium Part #	
8" x .250	CH08250MBVL	CP08250MBVL	
12" x .250	CH12250MBVL	CP12250MBVL	
12" x .500	CH12500MBVL	CP12500MBVL	

Specifications		
Aggregate Type Specification		
Hard	C 56	
Medium Hard	C60	
Soft	C64	

Bevel Blade

Additional blade sizes are available upon request.
Prices are per single blade.

Available Quality Grades:
Heavy Duty Orange (H)
Premium Eleck (P)
(Spacers sold separately)



Refractory Blades

Long Lasting, Fast Cutting in a Wide Range of Refractory Materials.

Available high concentration quality grades:

Heavy Duty Orange (H) (.295" diamond depth) Premium Black (P) (.250" diamond depth) Supreme Silver (U) (.250" diamond depth)

REFRACTORY BLADES Premium Black (P) Supreme Silver (U) H.D. SIZE Orange (H)Part # Part # Part # RH12110M 12" x .110 RP12110M RU12110M 12" x .125 RH12125M RP12125M RU12125M 14" x .110 RH14110M RP14110M RU14110M 14" x .125 RH14125M RP14125M RU14125M 16" x .125 RH16125M RP16125M RU16125M RU18125M 18" x .125 RH18125M RP18125M 20" x .125 RH20125M RP20125M RU20125M

1" arbor with drive pin hole is standard. Custom arbor sizes/types available upon request. When ordering, please specify arbor size/type. Additional blade sizes available upon request.

Refractory materials are used in linings for furnaces, kilns, incinerators and reactors.

WEI

To ensure maximum performance, water is required to cool these blades during the cutting process.

Refractory Blade Specifications	
Material/Abrasive Level	Specification
High alumina, hard materials, fast cutting	R92
Medium duty fire brick, fast cutting	R95
General purpose, insulating brick, ladle brick	R98
Long life for silicon carbide & other abrasive materials	R99



JOINT WIDENING & CHAMFER BLADES



Available Quality Grades:

Heavy Duty Orange (H) (.250" depth) Premium Black (P) (.275" depth) Professional Blue (T) (.310" depth)



*Ninja blades must be used in pairs. Prices listed are for single blades. Spacers are required for Ninja blades. Please call the factory for customized spacers.



- Widen control joints in green concrete or old sealed joints in cured concrete.
- Used in pairs with spacers, which allow the desired joint width to be maintained by flipping the blades inside out as the side gauge wears on the outside edge
- Spacers used between joint blades are made specifically for your machine and application

JOINT WIDENING BLADES					
SIZE	H.D. Part #	Premium Part #	Pro Blue Part #		
12" x .187	AH12187M	AP12187M	AT12187M		
12" x .220	AH12220M	AP12220M	AT12220M		
12" x .250	AH12250M	AP12250M	AT12250M		
14" x .187	AH14187M	AP14187M	AT14187M		
14" x .250	AH14250M	AP14250M	AT14250M		

Joint Widening & Cleaning Specifications				
Aggregate Type	Specification			
Hard-Average Abrasive	G62DW			
Hard-High Abrasive	G64DW			
Med Hard-Average Abrasive	G605DW			
Soft-High Abrasive	G606DW			

* Additional blade sizes are available upon request.

Ninja Joint Cleaning Blades

Used in pairs for fast, aggressive removal of sealants and compressibles in existing control joints while cutting joint face into smooth surface for resealing. See Joint Widening Specifications for Bonds.

Available Quality Grades:

Heavy Duty Orange (H) (.250" diamond depth) Premium Black (P) (.275" diamond depth) Professional Blue (T) (.310" diamond depth)

NINJA JOINT CLEANING BLADES					
SIZE	H.D. Part #	Premium Part #	Pro Blue Part #		
12" x .187	CNH12187M	CNP12187M	CNT12187M		
12" x .220	CNH12220M	CNP12220M	CNT12220M		
12" x .250	CNH12250M	CNP12250M	CNT12250M		
14" x.187	CNH14187M	CNP14187M	CNT14187M		
14" x .220	CNH14220M	CNP14220M	CNT14220M		
14" x .250	CNH14250M	CNP14250M	CNT14250M		

These are typical blades sizes. Custom sizes may be available.

Spacers are used between Ninja blades and are made specifically for your machine and application. (Spacers sold separately.)

Chamfer Grinding Blade

- 45 degree angled segments on thick disc for chamfer cuts for angle applications in concrete
- Can be used in pairs
- Special Premium grade diamonds for long life
- · For use on wall saws or walk behind saws

	.)
The second	
TIE	
For use on walk	For use on wall or

hydraulic hand saws.

CHAMFER SPECIAL GRINDING BLADE					
Size	Part #	Cat #	Description		
12" x .250" x 1"	CP12250CHF15	04094	Premium with 1.575" long, 45 degree segments		
12" x .250" x 1"	CP12250CHF1	41198	Premium with 1" long, 45 degree segments		
12" x .250 x 1"	CP12250CHF1527	57392	Premium with 1" long, 27 degree segments		

RING SAW BLADES





Dragon Claw Ring Saw Blades

- · For use ONLY with the Dragon Ring Saw
- Special 16mm split segments for fast cutting and slurry removal
- Use with water only
- 12" cutting depth with 16" blade
- 16" cutting depth with 20" blade



Wear plate is included with Dragon Claw blades

See Dragon Saw operator's manual for replacement frequency and instructions.

Replacement Wear Plate: Part #-6061184, Cat # 86515

Dragon Claw Ring Blades Specs


Extremely Hard Aggregate with

CRSDR18HM-16 Heavy Steel (specificly designed for electric and gas Dragon saws)

CRSDR20HM-16 Very Hard Aggregate
C41HM-16 Hard Aggregate
C42HM-16 Hard to Medium Hard Aggreg

Hard to Medium Hard Aggregate

Wear plate is included with each Dragon Claw Ring blade

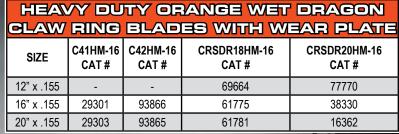



Wet Ring Saw Blades

- · Available with or without drive wheel
- · Custom wet bond specifications available
- · Offers a 10" cutting depth
- · Use for pre-cutting or following chain cutting
- · For use on competition-style ring saws

	REINFORCED
_	CONCRETE
	6 P
	4
	ب ا




NOTE: These blades DO NOT fit the Dragon Ring Saw

Ring Saw Blades Specs					
C42HM	Very Hard Aggregate				
C42WHM	Very Hard Aggregate with High Steel				
C50HM	Hard Aggregate				
C51WHM	Medium Hard Aggregate with Moderate Steel				
G50HM	Green Concrete with Hard Aggregate				

To ensure maximum performance, water is required to cool these blades during the cutting process.

WET RING SAW BLADES						
SIZE	CAT#	Specification				
14" x .165	90666	C42HM				
14" x .165	92209	C50HM				
14" x .165	90021	C51WHM				
14" x .165	92527	G50HM				
14" x .235	91403	C42WHM				
14" x .235	91404	C51WHM				
14" x .165	91495*	C42HM				
14" x .165	92666*	C50HM				
14" x .165	90134*	C51WHM				
14" x .165	54864*	G50HM				
14" x .235	92576*	C42WHM				
14" x .235	91057*	C51WHM				

^{*} Denotes blades that include drive wheel.





DIAMOND WIRE



Diamond Beaded Wire

For use on all Core Cut wire saws for cutting reinforced concrete, masonry stone and metals. Available with rubber injected and plastic coated versions in Premium and Supreme grades.



Sharpened) - Electroplated Ultra Grade for Reinforced Concrete - 46 beads per meter

ESG3 - Electroplated Ultra Grade for Reinforced Concrete - 40 beads per meter



W53C -Sintered Diamond Super Grade for Reinforced Concrete - 40 bead per meter



WV3B - Vacuum Brazed Ultra Grade for Reinforced Concrete 40 beads per meter



DWHP25 - Electroplated Super Grade for Steel - 46 beads per meter - Used on higher HP machines



BRW - Electroplated Super Grade - Wider Cut in Reinforced Concrete - 40 beads per meter

DIAMOND BEADED WIRE							
Bead Size / Description	Color/Coating	Concentration	Diamond Grade	Specification	Part #	Cat #	
10.2mm x 6mm Electroplated Wire (ideal for heavily reinforced concrete)	Black/Rubber	High	Ultra	BSG3 (sharpened)	WRD10.2EP3S	48781	
10mm x 6mm Electroplated Wire	Clear/Rubber	High	Ultra	BSG3 (sharpened)	SWRD10EP3	28154	
11mm x 6.5mm Sintered Wire	Black/Rubber	Very High	Super	WS3C	WRD1165PR	84547	
10.2mm x 5.5mm Vacuum Brazed Wire	Orange/Rubber	Very High	Ultra	WV3B	WRD10255PR	79498	
10.5mm x 5mm Electroplated Wire (For Steel Only)	Yellow/Rubber	High	Super	DWHP2S	WR1150URS	34118	
15mm x 5.5mm Electroplated Wire	Black/Rubber	High	Super	BRW	WR1555R	02205	



To ensure maximum performance, water is required to cool wire during the cutting process.

DIAMOND WIRE ACCESSORIES






HT45 Crimping Tool Jaws (Set of 2 pieces) Measures:

1.100" wide x .365" thick x .830 high



Screw Connectors



WIRE AND BEAD ACCESSORIES					
Description	Part #	Cat #			
Threaded Crimps 7mm X 20mm - Use HT45 Crimp Jaws P/N 1400297	1900296	82513			
Smooth Barrel 5/16" Wire Connector - Use HT45 Crimp Jaws P/N 1400521	1900183	00162			
Screw Connectors - Use HT45 Crimp Jaws 1400297	1400180	51176			
Swivel Connectors - Use HT45 Crimp Jaws 1400297 & Swivel Crimp Tool 860404	1400178	48176			
Swivel Crimp Pin Only - Extra Pins for Swivel Connectors P/N 1400178	724037	87592			
Swivel Crimp Tool - For removing pin in swivel connector	86404	67966			
Punch Replacement for Swivel Crimp Tool	148130	75678			
3/8" Connector (Short Version) - Use HT45 Crimp Jaw 1400297	1400177	74910			
Hydraulic Crimping Tool Model HT45 (Comes with 1 set of jaws P/N 1400297)	1400174	68408			
Crimping Jaws (Dye) for use with HT45 (See above for compatible crimps)	1400297	72310			
Crimping Jaws (Dye) for use with HT45 (See above for compatible crimps)	1400521	42848			
Hand Crimping Tool (No special jaws required)	1900074	00160			
4 1/2" X .040 X 7/8" Cut-Off Wheel For Cutting Diamond Wire (4 use on 4 1/2" Angle Grinder)	396110	47413			
C-12 Hand Held Wire Cutter	1900073	00159			
Rubber Lining for WS25 32" Wire Drive Wheel (2501663)	2501663	84927			
8" Idler Pulley (3400896) Works with P/N 73030 below	3400896	73031			
Idler Pulley Stand (3400895) Works with P/N 73031 above	3400895	73030			
Universal Transition Pulley	3404027	73394			
Plunge Wire Saw Pulley Assembly - Left Side (Need to have minimum 10" diameter hole)	3402034	68223			
Plunge Wire Saw Pulley Assembly - Right Side (Need to have minimum 10" diameter hole)	3402035	68224			
Wire Saw 7 Wheel 90 Degree Bracket	6075128	21504			
10" Plastic Idler Wheel Assembly	6020035	02583			
16" Plastic Idler Wheel Assembly	6020025	02581			
Universal Tee for Plastic Idler Wheels (Needs 2 Flange Bolts for Mounting Not Included)	6020004	02569			
Universal Knuckle for Plastic Idler Wheels (Needs 4 Flange Bolts for Mounting Not Included)	6020002	02567			
Wire Saw Clamp for Plastic Idler Wheels (Needs 3 Flange Bolts for Mounting Not Included)	6020003	02568			
Pipe Mounting Base for Plastic Idler Wheels (Needs 4 Flange Bolts for Mounting Not Included)	6020000	02565			
Flange Bolts for Plastic Idler Wheel Accessories Listed Above	2900164	01293			



HI	HIGH SPEED BLADE SPECIFICATIONS							
Application	Delux Cut	Star Blue	Standard Gold	Imperial Purple	X-Tra Plus Red	Heavy Duty Orange MAXX		
Q uality #	1	2	3	4	5	6		
Reinforced Concrete	H7D	H7B	H7S	H7I	Н7Х	H7H		
Hard Aggregate Concrete	H7D	Н7В	H7S	Н7І	н7х	н7н		
Concrete/Pavers	H8D	H8B	H8S	H8I	HBX	нвн		
Asphalt	H10D	H10B	H10S	H10I	H10X	H10H		
Green Concrete	H10D	H10B	H105	H10I	H10X	H10H		
Brick & Block	H10D	H10B	H105	H10I	H10X	H10H		
	11				- 0	300		

SMALL DIAMETER BLADE SPECIFICATIONS							
Application	Delux Cut	Star Blue	Standard Gold	X-Tra Plus Red	Heavy Duty Orange	Premium Black	
Q uality #	1	2	3	4	5	6	
Reinforced Concrete	E2D	E2B	E2S	E2X	E2H	E2P	
Hard Aggregate Concrete	E2D	E2B	E25	E2X	E2H	E2P	
Concrete	E2D	E2B	E2S	E2X	E2H	E2P	
Asphalt	E5D	E5B	E5S	E5X	E5H	E5P	
Green Concrete	E5D	E5B	E5S	E5X	E5H	E5P	
Brick & Block	E5D	E5B	E5S	E5X	E5H	E5P	
All Delivers of the second of						STATE OF THE PARTY	

MASONRY BLADE SPECIFICATIONS						
Application	Delux Cut Star Blue Standard Gold Heavy Duty Orange Prem					
Quality #	# 1 2 3 5 6					
Hard Materials, Hard Brick	DM80B	DM80B	DM80S	DM80H	DM80P	
Concrete Combo Brick/ Block	DM85D	DM85B	DM85S	DM85H	DM85P	
Combo Brick/Block	DW86D	DM86B	DM86S	DM86H	DM86P	
Abrasive Brick/Block	DM87D	DM87B	DM87S	DM87H	DM87P	

BLADE BUSHINGS						
Description	Part #	Cat #				
7/8" outside diameter x 5/8" inside diameter x .045 thickness	1700001	00099				
7/8" outside diameter x 5/8" inside diameter x .125 thickness	1700004	00102				
7/8" outside diameter x 20 MM inside diameter x .125 thickness	1700005	00104				
1" outside diameter x 20 MM inside diameter x .070 thickness	1700007	00106				
1" outside diameter x 7/8" inside diameter x .070 thickness	1700009	00109				
1-3/8" outside diameter x 1" inside diameter x .110 thickness	1700010	00110				
1" outside diameter x 5/8" inside diameter x .070 thickness	1700011	00111				
DIAMOND outside diameter x 5/8" inside diameter x .045 thickness	1700013	00113				
1" outside diameter x 20 MM inside diameter x .375 thickness	1700020	00116				
1" outside diameter x 7/8" inside diameter x .375 thickness	1700043	00129				
1" outside diameter x 20MM inside diameter x .250 thickness	1700122	46799				
1" outside diameter x 20MM inside diameter x .200 thickness * for FastCut saws	1700134	50326				



HIGH SPEED BLADES

Application	Delux Cut	Star Blue	Standard Gold	Imperial Purple	X-Tra Plus Red	HD Orange MAXX
Q uality Level	1	Q	3	4	5	6
Reinforced Concrete	H7D	H7B	H7S	H7I	H7X	H7H
Hard Aggregate Concrete	H7D	H7B	H7S	H7I	H7X	H7H
Concrete/Pavers	H8D	H8B	H8S	HBI	HBX	H8H
Asphalt	H10D	H10B	H10S	H10I	H10X	H10H
Green Concrete	H10D	H10B	H105	H10I	H10X	H10H
Brick & Block	H10D	H10B	H10S	H10I	H10X	H10H



- · Basic quality diamond and economical cutting
- · Sintered segment

KED						
SIZE	CAT#					
10" x .110 x 1"	22856					
12" x .110 x 1"	70495					
14" x .125 x 1"	70499					
16" x .125 x 1"	20926					
H8D 5	-Packs					
12" x .110 x 1"	01795					
14" x .125 x 1"	01796					
H8D 10	H8D 10-Packs					
12" x .110 x 1"	17560					
14" x .125 x 1"	17580					
137	00					
12" x .110 x 1"	50526					
14" x .125 x 1"	50537					
16" x .125 x 1"	50545					
H10D 5-Packs						
12" x .110 x 1"	50563					
14" x .125 x 1"	50595					



· Good quality diamond and good cutting value

H8B						
SIZE	CAT#					
10" x .110 x 1"	17710					
12" x .110 x UNV	92398					
14" x .125 x UNV	85261					
16" x .125 x UNV	21424					
18" x .125 x 1"	63599					
H8B 5-Packs						
12" x .110 x UNV	95054					
14" x .125 x UNV	95055					
H1	OB B					
12" x .125 x 1"	03048					
14" x .125 x 1"	14355					
16" x .125 x UNV	21217					
H10B 5-Packs						
12" x .125 x 1"	36841					
14" x .125 x 1"	15889					


UNV = 1" to 20mm universal knockout arbor 1" arbor blades include a 20mm bushing



Better quality diamond and better cutting

H7S		
CAT#		
57706		
57719		
91674		
16868		
28271		
35		
57707		
57720		
92873		
16868		
H1OS		
57708		
57721		
91767		
14395		
13846		















SPECIFICATIONS:

H7 <u>Insert Quality Grade Here</u> - Reinforced concrete and hard materials

HB *Insert Quality Grade Here* - General concrete, concrete pavers

H10 Insert Quality Grade Here - Asphalt, green concrete, brick and block

HIGH SPEED BLADES





High Speed Blades have various life expectancies depending on *quality grade*. The higher quality diamonds last longer and give maximum performance.

Heavy Duty Orange MAXX includes cuts in the segments that give this long life blade an extra speed boost.



GENERAL CONCRETE

PURPLE HBI

Diamond Depth: .394" (10mm) Segment Height: .494" (13mm)



Imperial Purple

• Better quality diamond and very good cutting life

HBI		
SIZE	CAT#	
12" x .110 x UNV	85149	
14" x .125 x UNV	78976	
16" x .125 x UNV	96480	
18" x .125 x 1"	34504	
20" x .140 x 1"	29041	
H10I		
12" x .110 x UNV	15376	
14" x .125 x UNV	15379	
16" x .125 x UNV	15381	
18" x .125 x 1"	39209	
20" x .140 x 1"	35259	



Dry blades are cooled with air by using intermittent cutting. Dry blades can be used with water.





For use on high speed, masonry and low HP walk behind saws

GENERAL CONCRETE

X-TRA

Diamond Depth: .250" (6mm) Segment Height: .350" (9mm)



· Higher quality diamond and long cutting life

HZX	
SIZE	CAT#
10" x .110 x 1"	11762
12" x .110 x UNV	53710
12" x .125 x UNV	53717
14" x .110 x UNV	53721
14" x .125 x UNV	53725
16" x .125 x UNV	75606
18" x .125 x 1"	15713
20" x .125 x 1"	11802
HE	3X
10" x .110 x 1"	11763
12" x .110 x UNV	53714
12" x .125 x UNV	53718
14" x .110 x UNV	53722
14" x .125 x UNV	53726
16" x .125 x UNV	89386
18" x .125 x 1"	11799
20" x .125 x 1"	15137
H1	ΟX
10" x .110 x 1"	11761
12" x .110 x UNV	53715
12" x .125 x UNV	53719
14" x .110 x UNV	53723
14" x .125 x UNV	53727
16" x .125 x UNV	76291
18" x .125 x 1"	11798
20" x .125 x 1"	11801

GENERAL CONCRETE

HBH

Diamond Depth: .295" (7mm) Segment Height: .395" (10mm)

Heavy Duty Orange

· Very high quality diamond and longer cutting life

HZH	
SIZE	CAT#
10" x .110 x 1"	11421
12" x .110 x UNV	53729
12" x .125 x UNV	53733
14" x .110 x UNV	53737
14" x .125 x UNV	53741
14" x .235 x 1"	11546
16" x .125 x UNV	91045
18" x .125 x 1"	11555
20" x .125 x 1"	11560
	3H
10" x .110 x 1"	11422
12" x .110 x UNV	53730
12" x .125 x UNV	53734
14" x .110 x UNV	53738
14" x .125 x UNV	53742
14" x .235 x 1"	11547
16" x .125 x UNV	90185
18" x .125 x 1"	11556
20" x .125 x 1"	11561
<u>H1</u>	
10" x .110 x 1"	11418
12" x .110 x UNV	53731
12" x .125 x UNV	53735
14" x .110 x UNV	53739
14" x .125 x UNV	53743
14" x .235 x 1"	28280
16" x .125 x UNV	89971
18" x .125 x 1"	14231
20" x .125 x 1"	11558

ULTIMATE HIGH SPEED BLADES



ULTIMATE CORES:

Wide gullets offer less surface-to-surface contact for an even faster cut.

U-GULLET CORE FOR VERY FAST CUTTING AND ULTIMATE PERFORMANCE

Diamond Depth: .250" (6mm) Segment Height: .350" (9mm) Diamond Depth: .295" (7mm) Segment Height: .395" (10mm) Diamond Depth: .433" (11mm) Segment Height: .533" (14mm)







MEDIUM AGGREGATE CONCRETE

IMPERIAL PURPLE HU81



MEDIUM AGGREGATE CONCRETE MEDIUM AGGREGATE CONCRETE




















Imperial Purple Ultimate

· Good quality diamond and long cutting life

HUBX	
SIZE	CAT#
14" x .125 x UNV	112876
16" x .125 x UNV	112877

X-Tra Plus Red Ultimate

· High quality diamond and longer cutting life

UNV = 1" to 20mm universal knockout arbor 1" arbor blades include a 20mm bushing

HUBH	
SIZE	CAT#
12" x .125 x UNV	112838
14" x .125 x UNV	112839
16" x .125 x UNV	112840

H.D. MAXX _Ultimate

- · Very high quality diamond and longest cutting life
- · -16mm segment for even faster cutting



SPEED Blades











Diamond blades are cooled with air by using intermittent cutting. Blades can be used with water.

For use on high speed, masonry and low HP walk behind saws

HIGH SPEED SPECIALTY BLADES





SPLIT SEGMENTS:

Offers fast cutting in multiple materials. The -16mm split segment allows less surface-to-surface contact and faster cutting.



Cut-ALL Multi-Purpose Blades

- · Great for the general contractor or landscaper whose job is different everyday.
- · Split segment removes slurry more efficiently for faster and more economical cutting.

Imperial Purple Cut-ALL Multi-Purpose	
SIZE	H8ICA Cat #
12" x .125 x UNV	15372
14" x .125 x UNV	15373
16" x .125 x UNV	15375

The Cut-ALL Split Segment Creates a Larger Weld Surface, Offering Double the Weld Strength Than Conventional Split Segment Blades

UNV = 1" and 20 mm universal arbor. High speed blades have a drive pin hole for use on small low HP walk behind saws

Heavy Duty Cut-ALL Multi-Purpose	
SIZE	H8CA Cat #
12" x .125 x UNV	84967
14" x .125 x UNV	84968
16" x .125 x UNV	84969
18" x .125 x 1"	86709
20" x .125 x 1"	84970
20 x .140 x 1"	86633
Cut-ALL 5-Packs	
12" x .125 x UNV	84989

84990





Diamond blades are cooled with air by using intermittent cutting. Blades can be used with water.

H8CA SPECIFICATIONS: **HBICA** T7AZ











14" x .125 x UNV











Metal & Ductile for A2Z



A2Z VACUUM BONDED:

Diamond bonded to the core for full blade life

- · Vacuum bonded technology-diamonds are adhered to the core landing
- Great for rescue and emergency situations
- Cuts a wide range of materials
- Holes in the core landing help with cooling while cutting metal and other heat generating materials

A2Z Vacuum Bonded	
SIZE	T7AZ Cat #
4" x .080 x 7/8"	44795
4-1/2" x .080 x 7/8"	21511
6" x .090 x 7/8"	13565
7" x .095 x 7/8"	21531
9" x .125 x 7/8"	18751
12" x .125 x 1"	21535
14" x .125 x 1"	21571
16" x .125 x 1"	21576
18" x .145 x 1"	69187
20" x .155 x 1"	69190
24" x .145 x 1"	108034

7/8" arbor blades include 5/8" bushing 1" arbor blades include 20mm heavy duty bushing










HIGH SPEED TURBO BLADES

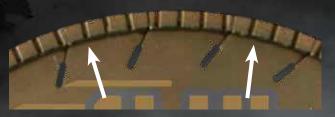

TURBO:

Turbo blades offer a faster cut than segmented blades due to the serrated segment design, allowing less surface-to-surface contact.



CONTINUE SUS RIM GENERAL GONCRETE

Diamond Depth: .370" (9mm) Segment Height: .470" (12mm)

CONTINUOUS RIM GENERAL CONCRETE TANDARD Diamond Depth:

EUT

.187" (5mm) Segment Height: .287" (7mm)

Basic quality diamond and economical cutting value SIZE T7D Cat # 4" x .080 x 7/8" 21124 4-1/2" x .080 x 7/8" 21134 5" x .080 x 7/8" 21139 6" x .080 x 7/8" 21141 7" x .095 x ◆7/8" 21163 8" x .095 x ◆7/8" 21183 21203 9" x .095 x ◆7/8" 21204 10" x .110 x 1" 12" x .125 x 1" 21205 14" x .125 x 1" 21212 Delux-Cut 5-Packs

4" x .080 x 7/8"

4-1/2" x .080 x 7/8"

5" x .080 x 7/8"

6" x .080 x 7/8"

7" x .095 x ◆7/8" 12" x .125 x 1"

14" x .125 x 1"

	BLUE
Good quality diamond and good cutting value	
SIZE	T7B Cat #
4" x .080 x 7/8"	74959
4-1/2" x .080 x 7/8"	74960
5" x .080 x 7/8"	80002
6" x .080 x 7/8"	80003
7" x .095 x ◆7/8"	74961
8" x .095 x 7/8"	80004
9" x .095 x 7/8"	80005
10" x .110 x 1"	80006
12" x .125 x 1"	74962
14" x .125 x 1"	74964
Star Blue	5-Packs
4" x .080 x 7/8"	76589
4-1/2" x .080 x 7/8"	76590
7" x .095 x ◆7/8"	76591
12" x .125 x 1"	84981
14" x .125 x 1"	84983

STANDARD GOLD Better quality diamond and better cutting value	
SIZE	T7S Cat #
4" x .080 x 7/8"	12480
4-1/2" x .080 x 7/8"	12483
5" x .080 x 7/8"	12486
6" x .080 x 7/8"	12487
7" x .095 x 7/8"	12489
8" x .095 x 7/8"	12493
9" x .095 x 7/8"	12494
10" x .110 x 1"	12495
12" x .125 x UNV	58454
14" x .125 x UNV	58455
16" x .125 x 1"	14527
Standard Gold 5-Packs	
4" x .080 x 7/8"	55237
4-1/2" x .080 x 7/8"	55238
7" x .095 x 7/8"	55239

PHILIPPINE THE



For use on electric circular saws, high speed saws masonry saws and right angle grinders.

21242

21288

21289

21308 21318

21220

21229

UNV = 1" and 20 mm universal knockout arbor 4" through 10" blades include 5/8" bushing ◆ = diamond shaped arbor





HIGH SPEED TURBO BLADES





IMPERIAL TURBO:

Imperial Purple Turbo features continuous rim turbo segment plus turbo core protection segments for long life cutting.



T-SEG TURBO:

Premium T-Seg blades have multiple speed creating features: gullets, turbo segment and T-Segs for wear protection. These factors give a extra-fast cut and long life expectancy.



IMPERIAL PURPLE

Detter quality diamond and very good cutting life	
SIZE	T7I Cat #
12" x .125 x 1"	79952
14" X .125 X 1"	79953
Imperial Purple 5-Packs	
12" x .125 x 1"	84987
14" X .125 X 1"	84988

• T7I blades have a built-in wear protection to extend the life of the blade

HEAVY DUTY ORANGE Very high quality diamond and longer cutting life		
SIZE	T7H Cat #	
4" x .080 x 7/8"	12281	
4-1/2" x .080 x 7/8"	12286	
5" x .080 x 7/8"	12290	
6" x .080 x 7/8"	12292	
7" x .095 x 7/8"	12298	
8" x .095 x 7/8"	12309	
9" x .095 x 7/8"	12312	
10" x .110 x 1"	12315	
12" x .125 x UNV	53862	
14" x .125 x UNV	53863	
16" x .125 x 1"	12336	
16" x .125 x 20mm	28824	
20" x .140 x 1"	12338	
Heavy Duty Orange 5-Packs		
4" x .080 x 7/8"	55240	
4-1/2" x .080 x 7/8"	55241	
7" x .095 x 7/8"	55242	

PREMIUM T-SEG Turbo Blades

General purpose cutting in concrete and masonry

Concrete and masonry		
SIZE	TS7P Cat #	
4" x .070 x 7/8"	73958	
4-1/2" x .070 x 7/8"	73959	
5" x .075 x 7/8	73960	
6" x .080 x 7/8"	73961	
7" x .090 x 7/8"	73962	
8" x .095 x 7/8"	73964	
9" x .095 x 7/8"	73965	
10" x .095 x 7/8"	73966	
12" x .125 x 1"	74610	
14" x .125 x 1"	74612	

Blades 7" and above come with a 7/8" bushing (removable) in a diamond arbor









Turbo blades are cooled with air by using intermittent cutting. Turbo blades can be used with water.

UNV = 1" and 20 mm universal knockout arbor 1" arbor blades include 20mm bushing 4" through 10" blades include 5/8" bushing

X-LINE TURBO BLADES

1Hg
X-TURBO

CORE CAST
COULT

Diamond Depth: .275" (7mm)

TXX- CORE FAST CUT A Diamond Depth: .354" (9mm)

XHUREO Elado

- Unique turbo core with enhanced air holes to keep the blade cool at high speeds
- General purpose, super fast cutting in multiple applications
- Includes a full radius drop segment for enhanced blade life.

X-TURBO Blades		
SIZE	T7X Cat #	
12" x .125 x 1"	63754	
14" x .125 x 1"	63760	
14" x .125 x 20mm	70864	
16" x .125 x 1"	63763	
20" x .125 x 1"	63764	

XL-TURBO Blade

- Unique turbo core with even more air holes to keep the blade cool at higher speeds
- General purpose, super fast cutting
- Better quality and blade cutting life

XL-TURBO Blades		
SIZE	T7XL Cat #	
12" x .125 x 1"	19311	
14" x .125 x 1"	19312	
16" x .125 x 1"	20161	
20" x .125 x 1"	20183	





XS-TURBO Blade

 Advanced turbo knotched segments for XS speed

X-LIZI

TURBO

Blades

- High quality diamond that deliver XS performance and life
- Optimized cooling holes to effectively dissipate heat during cutting

XS-TURBO Blades		
SIZE	T7XS Cat #	
9" x .110 x 1"	112447	
12" x .125 x 1"	111775	
14" x .125 x 1"	111774	
16" x .125 x 1"	111778	

OXILTUREO Elade

- Three different segments for longer life, faster cutting and reliable performance
- General purpose, super fast cutting
- Serrated turbo segment for the fastest cut
- Extended blade life with slant segment wear protection and tall segments

XXXXL Turbo Blades		
SIZE	T7XL3 Cat #	
12" x .125 x 1"	42890	
14" x .125 x 1"	42891	
16" x .125 x 1"	42892	
18" x .125 x 1"	60247	
20" x .125 x 1"	42893	
24" x .140 x 1"	63105	



Turbo blades are cooled with air by using intermittent cutting. Turbo blades can be used with water.

All X-Line blade Include 20mm bushing



Used on high speed, masonry, circular, tile and block saws. Circular saw for 9" XS-Turbo









T7X, T7XL, T7XS, T7XL3

H.P. TURBO BLADES





- **HIGH PERFORMANCE TURBO:** Segmented core with serrated turbo-style diamond segments allow a faster cut due to less surface-to-surface contact
- Faster cutting than traditional continuous rim turbo blades



H.P. Turbo

- Good quality diamond and good cutting value
- Very fast cutting
- Basic blade life

STAR BLUE H.P. Turbo		
SIZE HPT7B Cat		
4" x .080 x 7/8"	87986	
4-1/2" x .080 x 7/8"	88004	
7" x .095 x ◆ 7/8"	88020	
12" x .125 x 1"	88053	
14" x .125 x 1"	88056	
20" x .140 x 1"	88060	

◆ = diamond shaped arbor

- Standard Gold H.P. Turbo
- Better quality diamond and better cutting value
- Very fast cutting
- Better blade life

STANDARD GOLD		
H.P. Turbo		
SIZE	HPT7S Cat #	
4" x .080 x 7/8"	11703	
4-1/2" x .080 x 7/8"	11704	
5" x .080 x 7/8"	28247	
6" x .080 x 7/8"	19906	
7" x .095 x 7/8"	11705	
8" x .095 x 7/8"	11707	
9" x .095 x 7/8"	22322	
10" x .110 x 1"	11708	
12" x .125 x UNV	58452	
14" x .125 x UNV	58453	
16" x .125 x 1"	28654	
18" x .125 x 1"	14072	
20" x .140 x 1"	11715	
24" x .125 x 1"	09723	
24" x .140 x 1" 34336		
Standard Gold 5-Packs		
4" x .080 x 7/8"	57939	
4-1/2" x .080 x 7/8"	57941	
7" x .095 x 7/8"	57943	

- Very high quality for very fast cutting in general purpose hard materials, pavers, hard brick/block and stone
- Longer blade life

SIZE HPT5H Cat # HPT7H Cat : 4" x .080 x 7/8" 23909 11637 4-1/2" x .080 x 7/8" 25669 11639 5" x .080 x 7/8" 42803 11641 6" x .080 x 7/8" 94460 11642 7" x .095 x 7/8" 35586 11643 8" x .095 x 7/8" 16777 11645 9" x .095 x 7/8" 16776 11646 10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57944	H.D. ORANGE H.P. Turbo		
4-1/2" x .080 x 7/8" 25669 11639 5" x .080 x 7/8" 42803 11641 6" x .080 x 7/8" 94460 11642 7" x .095 x 7/8" 35586 11643 8" x .095 x 7/8" 16777 11645 9" x .095 x 7/8" 16776 11646 10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	SIZE	HPT5H Cat #	HPT7H Cat #
5" x .080 x 7/8" 42803 11641 6" x .080 x 7/8" 94460 11642 7" x .095 x 7/8" 35586 11643 8" x .095 x 7/8" 16777 11645 9" x .095 x 7/8" 16776 11646 10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	4" x .080 x 7/8"	23909	11637
6" x .080 x 7/8" 94460 11642 7" x .095 x 7/8" 35586 11643 8" x .095 x 7/8" 16777 11645 9" x .095 x 7/8" 16776 11646 10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	4-1/2" x .080 x 7/8"	25669	11639
7" x .095 x 7/8" 35586 11643 8" x .095 x 7/8" 16777 11645 9" x .095 x 7/8" 16776 11646 10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	5" x .080 x 7/8"	42803	11641
8" x .095 x 7/8" 16777 11645 9" x .095 x 7/8" 16776 11646 10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	6" x .080 x 7/8"	94460	11642
9" x .095 x 7/8" 16776 11646 10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	7" x .095 x 7/8"	35586	11643
10" x .110 x 1" 26574 11648 12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	8" x .095 x 7/8"	16777	11645
12" x .125 x UNV 59995 58210 14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	9" x .095 x 7/8"	16776	11646
14" x .125 x UNV 59890 58451 16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	10" x .110 x 1"	26574	11648
16" x .125 x UNV 29711 33372 18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	12" x .125 x UNV	59995	58210
18" x .125 x 1" 71056 11677 20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	14" x .125 x UNV	59890	58451
20" x .125 x 1" 56521 37682 20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	16" x .125 x UNV	29711	33372
20" x .140 x 1" 24198 11678 24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	18" x .125 x 1"	71056	11677
24" x .140 x 1" 27664 76645 H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	20" x .125 x 1"	56521	37682
H.D. Orange H.P. 5-Packs 4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	20" x .140 x 1"	24198	11678
4" x .080 x 7/8" 57940 4-1/2" x .080 x 7/8" 57942	24" x .140 x 1"	27664	76645
4-1/2" x .080 x 7/8" 57942	H.D. Orar	nge H.P. 5	-Packs
	4" x .080 x 7/8"		57940
7" x .095 x 7/8" 57944	4-1/2" x .080 x 7/8"		57942
	7" x .095 x 7/8"		57944

UNV = 1" and 20 mm universal knockout arbor 1" arbor blades come with 20mm bushing



Turbo blades are cooled with air by using intermittent cutting. Turbo blades can be used with water.



Blades 4" to 10"

used on circular saws



Blades 4", 4-1/2" & 7" used on right angle grinders



Blades 12" & 14" used on high speed and masonry saws



HPT7S



HPT7H

SPECIALTY TURBO BLADES



G.O. Grain Organized

Standard straight segment and a turbo slant segment for fast cutting while protecting the core



GRAVITON™ Turbo

Wavy core enhances cutting speed Continuous rim turbo style for a smooth cut



GRAVITON PLUS™ Turbo

Wavy core enhances cutting speed Continuous rim turbo style for a smooth cut. Air holes in the core allow cooling at high speeds to prolong cutting life.



GRAIN ORGANIZED

G.O. LONGER Slant segment extends cutting life G.O. FASTER Turbo segment maximizes cutting performance

G.O. GRAIN ORGANIZED Organized diamonds in the segments provide a constant cutting edge



Graviton Turbo

Wavy core enhances cutting speed

GRAVITON

Turbo Blades

Good Cutting Life

SIZE

4" x .085 x 7/8"

4-1/2" x .085 x 7/8"

7" x .085 x 7/8"

Graviton Plus™ Turbo

Wavy core enhances cutting speed

GRAVITON™ PLUS

Turbo Blades Longer

Cutting Life

T7GR+

Cat #

57335

57347

57351

G.O. Grain Organized High Speed Turbo Blades SIZE Cat # 81528 12" x .125 x 1 14" x .125 x 1 81321

	RAL PURPOSE ONCRETE
<i> </i>	


16" x .125 x 1

SPECIFICATION

81530

H8GO - Long life, fast cutting in general purpose concrete





Close-Up of Organized Diamonds in the Segment





ASPHALT



T7GR

Cat #

57328

57379

57332









T7GR, T7GR+









SIZE

4" x .095 x 7/8"


4-1/2" x .100 x 7/8'

7" x .110 x 7/8"




SPECIALTY BLADES





DEMO-CUT

- Carbide-tipped for metals, roofing and building materials, wood, tar, fire doors, plastic and rubber. Not suitable for concrete.
- Made with .250" thick carbide chunks that allow extremely fast cutting that will not bind or load (an important factor in rescue cutting).

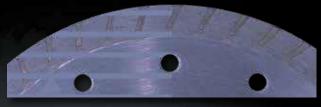

TURBO FIBER CEMENT BOARD

- Designed for stacked sheet cutting of fiber cement board
- Continuous-rim turbo segments for fast cutting
- Air holes in the core to keep the blade cool during dry cutting





DEMO-CUT Rescue Blades		
SIZE	Cat #	
7" x .250 x 5/8"	04613	
12" x .250 x 1"	96301	
14" x .250 x 1"	96302	
16" x .250 x 1"	26491	



TURBO FIBER Cement Board Blades	
SIZE T7FB Cat #	
4-1/2" x .080 x 7/8" ◆	01078
7" x .095 x 7/8" ◆	80353

◆ = diamond shaped arbor with 5/8" bushing



SPECIFICATION

HCD - Thin metal, roofing with tar, wood, plastic and rubber. Suitable for rescue applications - car doors and thin metals. Not suitable for heavy metal or ductile.

*Warning: When sawing, dust and material particles will be common as this product is very aggressive. Wear protective safety equipment when using and handling this blade. Blade edges are very sharp. Do not exceed saw manufacturer recommended RPM. Periodic inspections are required to insure proper condition. Never use damaged or cracked blades. Please consult warning sheet provided with blade.





SPECIFICATION

T7FB - Long life, fast cutting in fiber cement board (also known as Hardy Board)





SMALL DIAMETER BLADES



SMALL DIAMETER BLADES

- 4" to 9" diameter blades for hand-held machines
- · Great for general concrete or asphalt



回言以り次行のリナイ Basic quality diamond and economical cutting value		
SIZE	E2D Cat #	
4" x .080 x 7/8"	20966	
4-1/2" x .080 x 7/8"	21002	
5" x .080 x 7/8"	22729	
6" x .080 x 7/8"	22783	
7" x .080 x 7/8"	22785	
8" x .080 x 7/8"	22802	
9" x .080 x 7/8" 22820		
Delux-Cut 10-Packs		
4" x .080 x 7/8"	21003	
4-1/2" x .080 x 7/8"	21016	

STAR BLUE Good quality diamond and good cutting value		
SIZE	E2B Cat #	
4" x .070 x 7/8"	74950	
4-1/2" x .070 x 7/8"	74951	
5" x .080 x 7/8"	70461	
6" x .080 x 7/8"	70470	
7" x .080 x 7/8"	74952	
8" x .080 x 7/8"	74953	
9" x .080 x 7/8"	70494	
Star Blue 10-Packs		
4" x .070 x 7/8"	42196	
4-1/2" x .070 x 7/8"	42201	

STANDARD GOLD Better quality diamond and better cutting value		
SIZE	E2S Cat #	E5S Cat #
4" x .070 x 7/8"	11344	11346
4-1/2" x .070 x 7/8"	11347	11349
5" x .080 x 7/8"	11350	11351
6" x .080 x 7/8"	11352	16866
7" x .080 x 7/8"	11355	11357
8" x .080 x 7/8"	11359	11360
9" x .095 x 7/8"	95049	95050
Standard Gold 5-Packs		
4" x .070 x 7/8"	57953	55256
4-1/2" x .070 x 7/8"	57954	55258
7" x .080 x 7/8"	57955	55260







E5S E5X E5H E5P



Diamond blades are cooled with air by using intermittent cutting. Blades can be used with water.



For use on electric circular saws and side grinders

SMALL DIAMETER BLADES





SMALL DIAMETER BLADES

- · Laser-welded segments for reliable cutting
- · Dry blades that can be used with water



X-TRA PLUS RED Higher quality diamond and long cutting life

SIZE	E2X Cat #	E5X Cat #	
4" x .070 x 7/8"	11366	11368	
4-1/2" x .070 x 7/8"	11370	11373	
5" x .080 x 7/8"	11374	11375	
6" x .080 x 7/8"	11378	11379	
7" x .080 x 7/8"	11380	11381	
8" x .080 x 7/8"	11383	11386	
9" x .080 x 7/8"	11387	11388	
X-tra Plus Red 5-Packs			
4" x .070 x 7/8"	55261	55262	
4-1/2" x .070 x 7/8"	55263	55264	
7" x .080 x 7/8"	55265	55266	

HEAVY D	UTY (NEE
Very high quality dia	amond and	longer o	utting life

SIZE	E2H Cat #	E5H Cat #
4" x .070 x 7/8"	11242	11244
4-1/2" x .070 x 7/8"	11249	11253
5" x .080 x 7/8"	11257	11259
6" x .080 x 7/8"	11263	11264
7" x .080 x 7/8"	11268	11274
8" x .080 x 7/8"	11290	11293
9" x .080 x 7/8"	11297	11302
Heavy Duty	Orange	5-Packs
4" x .070 x 7/8"	55267	55268
4-1/2" x .070 x 7/8"	55270	55271
7" x .080 x 7/8"	55272	55273

PREMIUM BLACK

Highest quality diamond and longest cutting life		
SIZE	E2P Cat #	E5P Cat #
4" x .070 x 7/8"	11304	11305
4-1/2" x .070 x 7/8"	11307	11308
5" x .080 x 7/8"	11310	11311
6" x .080 x 7/8"	11315	11316
7" x .080 x 7/8"	11319	11322
8" x .080 x 7/8"	11338	11339
9" x .080 x 7/8"	11340	11342
Premium Black 5-Packs		
4" x .070 x 7/8"	55274	55275
4-1/2" x .070 x 7/8"	55276	55277
7" x .080 x 7/8"	55278	55279



Use Drawing # 52162 when ordering blades for flush cut hub adapter.

FLUSH CUT HUB ADAPTER FOR SMALL DIAMETER BLADES

Used for cutting flush with a small diameter blade on a side grinder

The Flush Cut Hub fits any standard 5/8"-11 spindle
 Blades must be ordered special with flush cut 4-bolt pattern in order to work with the hub adapter.
 Part # 4400600, Cat # 53323

4-bolt pattern with 5/8"-11 thread



DRY WALK BEHIND BLADES

DRY WALK BEHIND BLADES

- All dry walk behind blades include a drive pin hole
- For intermittent cuts without water for patch/repair work or expansion joints
- Laser welded for dry cutting



DELUX-CUT

value		
SIZE	DC1D Cat #	DA2D Cat #
12" x .125 x 1"	20806	20861
14" x .125 x 1"	20825	20875

Good quality diamond and good cutting value		
SIZE	DC1B Cat #	DA2B Cat #
12" x .125 x 1"	70424	70412
14" x .125 x 1"	70426	70422
18" x .125 x 1"	83679	83678

STANDARD GOLD

Bottor quality diamena and bottor catting raido			
SIZE	DC1S Cat #	DA2S Cat #	DG3S Cat #
12" x .125 x 1"	11208	11189	11219
12" x .187 x 1"	27278	14702	
14" x .125 x 1"	11210	11190	11222
14" x .187 x 1"	11211	11191	
18" x .125 x 1"	50004	50002	
20" x .125 x 1"	17457	14917	

IMPERIAL PURPLE

Better quality diamond and very good

SIZE	DC1I Cat #	
12" x .110 x 1"	89306	
14" x .125 x 1"	73080	



For use on low horsepower (< 20HP)walk behind saws



DC1D DC1B DC1S DC1I



DA2D DA2B DA2S



DG3S



Dry blades are cooled with air by using intermittent cutting. Dry blades can be used with water.

DRY WALK BEHIND BLADES



WIDE GULLETS TO KEEP THE BLADE COOL

125" Blades can be used on high speed saws

V-Gullets allow less surface-to-surface contact and helps keep the blade cool in dry applications.





HEAVY DUTY ORANGE Very high quality diamond and Longer blade life				
SIZE	DC1H Cat #	DA2H Cat #	DG3H Cat #	
12" x .125 x 1"	11196	11156	11213	
12" x .187 x 1"	11197	11158	50718	
14" x .125 x 1"	11199	11162	11215	
14" x .187 x 1"	11200	11170	19093	
16" x .125 x 1"	15499	15334	35322	
16" x .187 x 1"	30677	46464		
18" x .125 x 1"	11203	11174	44588	
20" x .125 x 1"	60330	44475		

	PREMIUM BLACK Highest quality diamond and Longest blade life				
SIZE	DC1P Cat #	DA2P Cat #	DG3P Cat #		
12" x .125 x 1"	11204	11175	11217		
12" x .187 x 1"	11205	15954	24109		
14" x .125 x 1"	11206	11178	11218		
14" x .187 x 1"	11207	11183	77223		
16" x .125 x 1"	16585	63018	70883		
16" x .187 x 1"	42715				
18" x .125 x 1"	14582	34477	25607		
20" x .125 x 1"	55061	60631			



For use on low horsepower (< 20HP) walk behind saws

- · All dry walk behind blades include a drive pin hole
- For intermittent cuts without water for patch/repair work or expansion joints
- · Laser welded for dry cutting



DC1H DC1P



DA2H DA2P



DG3H DG3P



Basic quality diamond and economical cutting value		
SIZE	DM85D Cat #	
12" x .110 x 1"	20887	
14" x .125 x 1"	20888	
18" x .125 x 1"	20908	
20" x .125 x 1"	20924	

STAR BLUE Good quality diamond and good cutting value			
SIZE	DM85B Cat #		
12" x .110 x 1"	70504		
14" x .125 x 1"	70520		
18" x .125 x 1"	20649		
20" x .125 x 1"	20651		

STANDARD GOLD Better quality diamond and better cutting value				
SIZE	DM80S Cat #	DM85S Cat #	DM86S Cat #	DM87S Cat #
10" x .110 x 1"	11947	11948	11949	11950
12" x .110 x 1"	11952	11954	11955	11956
14" x .110 x 1"	11959	11961	11964	11965
14" x .125 x 1"	22087	18360	36413	30441
16" x .125 x 1"	76800	74823	76801	11968
18" x .125 x 1"	28288	11973	11974	20122
20" x .125 x 1"	11976	11977	11978	11979
24" x .140 x 1"	40793	40794	40795	40796

1" arbor blades come with 20mm bushing

WHAT IS MASONRY?

Masonry describes both the material and the process of creating surfaces and structures from bricks, stone and block. These masonry units are bonded together by mortar, all of which are made up of different shapes and materials.

TYPES OF MASONRY

Brick, Stone and Concrete Block

Masonry Blade Specifications: DM80-Hard materials, hard brick-fast cutting


DM85-General purpose, combo brick/block

DM86-Combo brick/block

DM87-Abrasive brick/block

*Not recommended for cutting reinforced concrete















HEAVY DUTY ORANGE Very high quality diamond and longer cutting life				
SIZE	DM80H Cat #	DM85H Cat #	DM86H Cat #	DM87H Cat #
10" x .110 x 1"	11817	11819	11820	11821
12" x .110 x 1"	11825	11827	11828	11829
14" x .110 x 1"	11847	11850	11853	11855
14" x .125 x 1"	11859	11861	11862	11864
16" x .125 x 1"	21697	11876	21421	46214
18" x .125 x 1"	11879	11881	11883	11884
20" x .125 x 1"	11893	11895	11897	11898
24" x .140 x 1"	40797	40798	40799	40800

HEAVY DUTY ORANGE Silent Core			nt Core	
SIZE	DM80HSC Cat #	DM85HSC Cat #	DM86HSC Cat #	DM87HSC Cat #
14" x .125 x 1"	66587	66644	66648	66652
18" x .125 x 1"	66637	66645	32040	66653
20" x .140 x 1"	66638	66646	66650	66654
24" x .140 x 1"	66669	66647	66651	66655

PREMIUM BLACK Highest quality diamond and longest cutting life				
SIZE	DM80P Cat #	DM85P Cat #	DM86P Cat #	DM87P Cat #
10" x .110 x 1"	11904	11905	11906	11907
12" x .110 x 1"	11908	11909	11910	11911
14" x .110 x 1"	11917	11920	11921	11922
14" x .125 x 1"	22109	14644	11925	21993
16" x .125 x 1"	11930	11931	38115	53034
18" x .125 x 1"	18611	11935	11936	11937
20" x .125 x 1"	11940	11942	11943	11944
24" x .140 x 1"	40801	40802	40803	51752

PREMIUM BLACK Silent Core				
SIZE	DM80PSC Cat #	DM85PSC Cat #	DM86PSC Cat #	DM87PSC Cat #
14" x .125 x 1"	66640	66656	66660	66664
18" x .125 x 1"	66641	66657	66661	66665
20" x .140 x 1"	66642	10099	66662	66666
24" x .140 x 1"	66643	66659	66663	66667

DM80-Hard materials, hard brick-fast cutting

DM85-General purpose, combo brick/block

DM86-Combo brick/block

DM87-Abrasive brick/block


*Not recommended for cutting reinforced concrete





Silent Core Masonry Blade
Laser cut harmonic dampeners
reduce vibration. Noise is reduced
by -10dB


Special laser anchor slots near the segments provide for increased noise reduction and helps in the prevention of core cracking

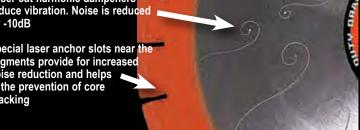

TUCK POINT BLADES







DELUX:GUT

Basic quality diamond and

economical	cutting value	
SIZE	DT9D Cat #	
4" x .250 x 7/8"	21065	
4-1/2" x .250 x 7/8"	21072	
7" x .250 x 7/8"	21074	
Delux-Cut 5-Packs		
4" x .250 x 7/8"	21090	
4-1/2" x .250 x 7/8"	21096	
7" x .250 x 7/8"	21108	

STAR BLUE Good quality diamond and good cutting value			
SIZE	DT9B Cat #		
4" x .250 x 7/8"	74966		
4-1/2" x .250 x 7/8"	74967		
5" x .250 x 7/8"	51438		
7" x .250 x 7/8"	74968		
Star Blue 5-Packs			
4" x .250 x 7/8"	76592		

76593

76594

STANDARD GOLD Better quality diamond and better cutting value		
SIZE	DT9S Cat #	
4" x .250 x 7/8"	12462	
4-1/2" x .250 x 7/8"	12466	
5" x .250 x 7/8"	12470	
7" x .250 x 7/8"	12475	
8" x .250 x 7/8"	12476	
Standard G	old 5-Packs	
4" x .250 x 7/8"	55225	
4-1/2" x .250 x 7/8"	55226	
7" x .250 x 7/8	55227	

Tuck Point Blades:

- · Cleans, routs and repairs cracks in concrete and other materials
- · Fast cutting while leaving a clean groove





4-1/2" x .250 x 7/8"

7" x .250 x 7/8"



Diamond Depth: .220" (6mm) Segment Height: .320" (8mm)

UTILITY GREEN

Very good quality diamond
and good cutting value
2-in-1 for faster cutting
3-in-1 for faster cutting and wider cut

SIZE	DT9G Cat #		
4" x .250 x 7/8"	94186		
4-1/2" x .250 x 7/8"	94187		
5" x .250 x 7/8"	96364		
7" x .250 x 7/8"	25953		
Utility Green 2-in-1			
4" x .250 x 7/8"	31807		
4-1/2" x .250 x 7/8"	20207		
Utility Green 3-in-1			
4" x .375 x 7/8"	94183		
4-1/2" x .375 x 7/8"	94184		
5" x .375 x 7/8"	94185		

STAR BLUE Multi-Blades

Good quality diamond and good cutting value - 2-in-1 for faster cutting 3-in-1 for faster cutting and wider cut

,				
SIZE	DT9B Cat #			
Star Blue 2-in-1				
4" x .250 x 7/8"	20790			
4-1/2" x .250 x 7/8"	22691			
5" x .250 x 7/8"	07916			
7" x .250 x 7/8"	51191			
Star Blue 3-in-1				
4" x .375 x 7/8"	79892			
4-1/2" x .375 x 7/8"	79893			



DT9

For mortar joints

56

HEAVY DUTY ORANGE

Very high quality diamond SIZE DT9H Cat #

4" x .250 x 7/8"	12418
4-1/2" x .250 x 7/8"	12429
5" x .250 x 7/8"	12437
7" x .250 x 7/8"	12446
8" x .250 x 7/8"	12454
Heavy Duty O	range 5.Packs
4" x .250 x 7/8"	55228
4-1/2" x .250 x 7/8"	55229
1 1/2 X :200 X 1/0	33223



For use on electric circular saws and side grinders

TUCK POINT & V-CRACK Blades



HEAVY DUTY ORANGE High Performance SIZE HPDT9H Cat # 4" x .250 x 7/8" 11697 4-1/2" x .250 x 7/8" 11698 5" x .250 x 7/8" 11700 7" x .250 x 7/8" 11702 8" x .250 x 7/8" 16638 Heavy Duty Orange 5-Packs 4" x .250 x 7/8" 55280

	Basic quality diamond and economical cutting value				
	SIZE	V2D Cat #			
3	4"	21118			
	7"	21122			
	Basic quality dia				
	4"	12636			
	V-Crack Blades:				

STAR BLUE V-Grack Good quality diamond and good cutting value				
SIZE V2B Cat #				
4"	02739			
7"	02746			

Heavy Duty Orange High Performance:

4-1/2" x .250 x 7/8"

7" x .250 x 7/8

- Very high quality diamond and longer cutting life
- Super-fast cutting due to less surface to surface contact
- For use on circular saws and right angle grinders

- · Cleans, routs and repairs cracks in concrete and other materials
- Fast cutting while leaving a clean groove
- Segment design provides longer life
- Segment width .310 at the widest point

Staggered Segments for Faster Cutting

55360

55361

Tuck Point blades can be fitted with a diamond shaped arbor. Extra charge for diamond arbors (tuck point blades)



DT9

For mortar joints

For use on right angle grinders

Note: 5/8"-11 hub unless otherwise noted

HEAVY DUTY ORANGE V-Crack Very high quality diamond and longer cutting life

V2H Cat #

SIZE	VZH Cat #	
4"	27542	
7"	26719	
7" diamond arbor	97808	
7" x 7/8" round arbor	52501	
U B		

CIZE

Heavy Duty Orange 5-Packs 55223 4" 7" 55224

HEAVY DUTY ORANGE Vertical Tuck Point Pins					
SIZE	VT2H Cat #				
1/4" Diameter with 5/16" Shaft 12524					
3/8" Diameter with 5/16" Shaft	12529				
1/4" Diameter with 1/4" Shaft	93788				
3/8" Diameter with 1/4" Shaft	93789				

Vertical Tuck Point Pins

- Great for cleaning out mortar from hard to reach joints and butt (vertical) joints
- Grinds out butt joints in seconds without damaging existing blocks
- For use on basic router machines

Your choice of 5/16" or 1/4" shafts.



DRY TILE BLADES



DELUX-CUT

 Basic quality diamond and economical cutting value

DELUX:CUT Dry				
SIZE	TD2D Cat #			
*4" x .060 x 7/8"	20664			
*4-1/2" x .060 x 7/8"	20675			
*5" x .060 x 7/8"	20681			
*6" x .060 x 7/8"	20716			
**7" x .060 x 5/8"	20721			
8" x .060 x 5/8"	20733			
★9" x .060 x 1"	68466			
10" x .060 x 5/8" 20751				
Delux-Cut 5-Packs				
*4" x .060 x 7/8"	20768			
**7" x .060 x 5/8" 20769				

STAR BLUE

Good quality diamond and good cutting value

STAR BLUE Dry				
SIZE	TD2B Cat #			
*4" x .060 x 7/8"	80012			
*5" x .060 x 7/8"	80013			
**7" x .060 x 5/8"	80014			
8" x .060 x 5/8"	80015			
★9" x .060 x 1"	68467			
10" x .060 x 5/8"	80016			
Star Blue 5-Packs				
*4" x .060 x 7/8"	80017			
**7" x .060 x 5/8"	80018			

AVY DUTY ORANGE

Very high quality diamond and longer cutting life

The same of		-	AND DESCRIPTION OF THE PERSON NAMED IN	
3 3	LUE Dry	N.	HEAVY DUTY ORANGE Dry	
	TD2B Cat #		SIZE	TD2H Cat #
8"	80012	ľ	*4" x .060 x 7/8"	12508
8"	80013		*5" x .060 x 7/8"	12510
/8"	80014		*6" x .060 x 7/8"	12512
3"	80015		**7" x .060 x 5/8"	12515
1"	68467		8" x .060 x 5/8"	12517
8"	80016		10" x .060 x 5/8"	12519
Blue 5-Packs		Heavy Duty Orange 5-Packs		
8"	80017		*4" x .060 x 7/8"	55221
/8"	80018		**7" x .060 x 5/8"	55222

^{★1&}quot; arbor with removable 5/8" bushing







Tile Sharpening Stone

Part #	Cat #
SS1000	48960

^{*}Denotes 7/8" arbor with 5/8" bushing.

^{**}Denotes diamond arbor with 5/8" (removable) bushing









STANDARD COLD

· Better quality diamond and better cutting value

STANDARD GOLD Wet				
SIZE	TI7S Cat #	TI10S Cat #		
3-3/8" x .050 x 5/8"	45233			
4" x .060 x 5/8	12374	87701		
6" x .060 x 5/8"	12375	87702		
7" x .060 x 5/8"	45234	87703		
8" x .060 x 5/8"	12377	87704		
9" x .060 x 5/8"	45235	87705		
10" x .060 x 5/8"	12379	87706		
12" x .080 x 1"	45236	87707		

13522

HEAVY DUTY ORANGE

Very high quality diamond and longer cutting life • Highest quality diamond and longest cutting life

HEAVY DUTY ORANGE Wet		
SIZE	TI7H Cat #	TI10H Cat #
4" x .060 x 5/8"	58059	87709
4-1/2" x .060 x 5/8"	87835	12343
4-1/2" x .060 x 20mm	96903	
6" x .060 x 5/8"	12346	87710
7" x .060 x 5/8"	57855	87711
8" x .060 x 5/8"	12352	87712
9" x .060 x 5/8"	12355	87713
10" x .060 x 5/8"	12359	87714
12" x .080 x 1"	13512	87715
14" x .080 x 1"	23838	87716

PREMIUM BLACK	REMIUM BL	ACK	
---------------	-----------	-----	--

		PREMIUI	M BLAC	K Wet
#	ı	SIZE	TI7P Cat #	TI10P Cat #
	Ī	4" x .060 x 5/8"	12361	87717
	i	6" x .060 x 5/8"	12362	87718
		7" x .060 x 5/8"	45553	87719
		8" x .060 x 5/8"	12364	87720
		9" x .060 x 5/8"	87725	87721
		10" x .060 x 5/8"	12368	87722
		12" x .080 x 1"	12369	87723
		14" x .080 x 1"	12370	87724




14" x .080 x 1"



87708

Fast, smooth cut in granite, marble, glass, porcelain and other hard, dense tiles.



TI10- Fast cutting in ceramic or fiberglass and other soft, porous tiles.

PRODUCTS

CP305 Hand Polisher
Wet/Dry Polishing Pads
3-Step Polishing Pucks
Metal Transition Pucks
Cup Grinders
CORE LOCK Grinding Inserts
HTC® Compatible Grinding Inserts

CPG80E Low Profile Floor Grinder
CPG100 Single Head Floor Grinder
CPG200 Dual Head Floor Grinder
CPST1415E Floor Scraper/Stripper
CPS800 Series Scarifiers
CPS1300 Series Scarifiers





CPG305 HAND POLISHER







12" Grinding Width


5" Pad Capacity Electric

FEATURES

- Uses three 5" diamond polishing pads and/or diamond grinding discs
- Planetary, gear driven system
- Powered by a heavy duty FEIN® variable speed motor
- · Center coolant feed
- · Precision bearings
- · Heavy duty handles and body
- · Built-in vacuum port
- Rugged, hand-operated 12" platform that grinds, hones and polishes concrete surfaces
- Operates wet or dry (with optional dust cowl)
- 12" platform turns at a lower rate than the higher rotational speed (>2000rpm) of the 5" platens
- The RPM provides the optimal speed for diamond polishing, producing a perfect finish 5 times faster than a single head polisher

SPECIFICATIONS

	Power Supply	115V/60Hz
	Motor Power	2 HP
7	Amp Draw	11 amp, uses 20amp breaker
	RPM	2500
	Includes	Slurry skirt, coolant feed

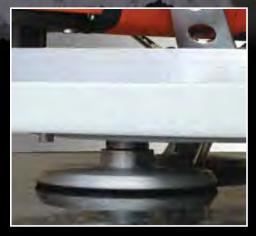

One of three 5" grinding platens (Velcro° surface)

CPG305 HAND POLISHER						
Model #	Motor Power	Power Source	Part #	Cat #	Pad Capacity	Product Weight (lbs.)
CPG305	115 V, 11 amp	Electric	5801328	32947	5" x 3	30



POLISHING PADS & PUCKS

Ultra-Smooth, High Sheen Finish!

For Use on Most Standard Concrete Polishing Machines



Premium Wet Polishing Pads

- · Resin bonded pads for high sheen concrete polishing
- Ultra-smooth finish
- High strength Velcro® back for worry-free finishing

4" PRE	MIUM WET POI	ISHING PADS
Grit	Part #	Cat #
50	DCP043050	68436
100	DCP0430100	68439
200	DCP0430200	68440
400	DCP0430400	68441
800	DCP0430800	68442
1500	DCP04301500	68480
3000	DCP04303000	68487



Premium Dry Polishing Pads

- Resin bonded pads for high sheen concrete polishing
- Ultra-smooth finish
- High strength Velcro® back for worry-free finishing

4" PRE	4" PREMIUM DRY POLISHING PADS		
Grit	Part #	Cat #	
50	DCPD0450	68509	
100	DCPD04100	68510	
200	DCPD04200	68516	
400	DCPD04400	68529	
800	DCPD04800	68530	
1500	DCPD041500	68536	
3000	DCPD043000	68545	



5" Premium Dry Polishing Pads

- Resin bonded pads for high sheen concrete polishing
- Ultra-smooth finish
- · High strength Velcro® back for worry-free finishing

5" PRE	EMIUM DRY PO	LISHING PADS
Grit	Part #	Cat #
50	DCP053050	85165
100	DCP0530100	85241
200	DCP0530200	85262
400	DCP0530400	85349
800	DCP0530800	85356
1500	DCP05301500	85362
3000	DCP05303000	85378



7" Premium Dry Polishing Pads

- Resin bonded pads for high sheen concrete polishing
- Ultra-smooth finish
- High strength Velcro® back for worry-free finishing

7" PRE	MIUM DRY PO	LISHING PADS
Grit	Part #	Cat #
50	DCP073050	21901
100	DCP0730100	21971
200	DCP0730200	22014
400	DCP0730400	22028
800	DCP0730800	22052
1500	DCP07301500	22066
3000	DCP07303000	22071



All polishing pads and pucks use the WET Discount and are sold as single items.

POLISHING PADS & PUCKS





Premium Wet Polishing Pads

- Resin bonded pads for high sheen concrete polishing
- 3" for hand-held polishing machines
- High strength Velcro® back for worry-free finishing

3" X 10MM FLOOR POLISHING PUCKS		
Grit	Part #	Cat #
50	DCP031050	68657
100	DCP0310100	68579
200	DCP0310200	68762
400	DCP0310400	68763
800	DCP0310800	68863
1500	DCP03101500	68881
3000	DCP03103000	68911



3-Step Polishing Pucks

- Used in three phases for an extra shine
- 3" for hand-held polishing machines
- High strength Velcro® back for worry-free finishing

	(3-STEP) LISHING	
STEP	Part #	Cat #
#0	DCP03100	68934
#1	DCP03101	68942
#2	DCP03102	68951
#3	DCP03103	68989
#3 Extra Shine	DCP03103X	69006



Metal Transition Grinding Pucks

- Good quality diamond for long life
- Used for a smooth grind before polish
- Available in two grits

3" METAL FLOOR GRINDING PUCKS		
Grit	Part #	Cat #
80	CGMP0380	69012
120	CGMP03120	69014

All Polishing Pads and Pucks use the WET Discount



Backer Pads for Pads & Pucks

- 5/8"-11 threaded hub
- High-strength Velcro® back with foam cushion for worry-free finishing and grinding

	BACKER PADS				
Size	Part #	Cat #			
4"	BPV4000	75461			
5"	BPV5000	75462			
7"	BPV7000	54543			

Core-Lock Adapter

- Adapts to our 8", 10" and 12" grinding plates for 3" polishing pads
- High-strength Velcro® back and magnets with Core-Lock connection

	C		-	1=	Н	7	7		Ť.	~
										П
		4	-	А	Œ	Ш	Ε	L	1	
_								_		

Part #	Cat #
DCP3000	101943

ARROW Segmented Cup Wheel

- Good quality diamond for long life grinding
- Used for grinding concrete before polish

FINISHING CUP V		
	DRY	
SIZE	Part #	
1" v 5/8_11	CG44000	

SIZE	Part #	T5A Cat#
4" x 5/8-11	CGA4000	64783
5" x 5/8-11	CGA5000	65010
7" x 5/8-11	CGA7000	65085



JTED HEEL .

Core Prep adapters use the Wet Discount





Single Row-S5D

 General grinding and removal

Povidia Rowald General grinding and removal

with a smooth finish

Single Row: S5B General grinding and removal

Pouble Row-D58 General grinding and removal with a smooth finish

Basic quality diamond and economical grinding value			
SIZE/DESCRIPTION	SPEC	Cat #	
4" x 5/8-11 Single Row	S5D	22405	
4-1/2" x 5/8-11 Single Row	S5D	22406	
5" x 5/8-11 Single Row	S5D	42539	
7" x 5/8-11 Single Row	S5D	22408	
7" x 7/8" Single Row	S5D	38970	
4" x 5/8-11 Double Row	D5D	22410	
4-1/2" x 5/8-11 Double Row	D5D	22415	
5" x 5/8-11 Double Row	D5D	42541	
7" x 5/8-11 Double Row	D5D	22418	
7" x 7/8" Double Row	D5D	38971	

STAR BLUE Segmented					
Good quality diamond and good grinding value					
SIZE/DESCRIPTION	SPEC	Cat #			
4" x 5/8-11 Single Row	S5B	77383			
4" x 7/8" Single Row	S5B	63111			
4-1/2" x 5/8-11 Single Row	S5B	77502			
4-1/2" x 7/8" Single Row	S5B	63114			
7" x 5/8-11 Single Row	S5B	77542			
7" x 7/8" Single Row	S5B	63116			
4" x 5/8-11 Double Row	D5B	70360			
4" x 7/8" Double Row	D5B	63117			
4-1/2" x 5/8-11 Double Row	D5B	70387			
4-1/2" x 7/8" Double Row	D5B	63119			
7" x 5/8-11 Double Row	D5B	70391			
7" x 7/8" Double Row	D5B	63120			



- Single Row-S5G
- General grinding and removal

Pouble Row-D5G

General grinding and removal with a smooth finish

Cup Grinders are Part of the Core Prep Line of **Products**

UTILITY GREEN Segmented

Very good quality diamond and very good grinding value		
SIZE/DESCRIPTION	SPEC	Cat #
4" x 5/8-11 Single Row	S5G	94177
7" x 5/8-11 Single Row	S5G	94178
4" x 5/8-11 Double Row	D5G	94175
4" x 7/8" Double Row	D5G	06617
7" x 5/8-11 Double Row	D5G	94176





For use on right angle grinders







Single Row:555

General grinding & heavy removal

Pouble Row-D5S

- General grinding with smooth finish
- Heavy removal

'Alexandra	
(0)	
00	
	-)

Standard Cold Turbo Low Profiles

S33S2530

- Grinding Medium to Hard Concrete
- High quality diamond and better grinding value

STANDARD GOLD Low Profile					
Size	Segment Type	Number of Segments	Cat #		
5" x 5/8"-11	Single Row	7	84635		
5" x 7/8"	Single Row	7	48352		
5" x 5/8"-11	Spiral Turbo	12	48359		
5" x 7/8"	Spiral Turbo	12	48389		

Lower profile cups will fit on Bosch® grinders- A More Shallow Cup Than The Basic Cup Grinders Single Row = Basic grinding and removal **Spiral Turbo** = Fast, heavy grinding and removal

STANDARD GOLD Segmented

Better quality diamond and better grinding value				
SIZE/DESCRIPTION	SPEC	Cat # (5/8"-11 hub)	Cat # (7/8" hub)	
4" Single Row	S5S	07442	07446	
5" Single Row	S5S	28508	07447	
7" Single Row	S5S	07450	07451	
4" Double Row	D5S	07429	07430	
5" Double Row	D5S	07431	07432	
7" x 5/8-11 Double Row	D5S	07434	07436	

- General grinding with smooth finish
- Heavier removal



Single Row-S5H

- General grinding
- Heavier removal

出

•

Heavy Duty Orange Turbo Low Profiles

Grinding Medium to Hard Concrete Very high quality diamond and longer grinding life

LEAVY DUTY ORANGE Segmented				1080	Street Section 1	Total Adjust State (Co.)	the second second	CONTRACTOR OF THE PARTY OF
Very high quality diamond and longer life					HE/		TY ORAL Profile	/GE
SIZE/DESCRIPTION	SPEC	Cat # (5/8"-11 hub)	Cat # (7/8" hub)		Size	Segment	Number of	Cat
4" Single Row	S5H	00015	07403			Туре	Segments	
5" Single Row	S5H	07404	21112		5" x 5/8"-11	Single Row	7	8467
7" Single Row	S5H	00017	07412		5" x 7/8"	Single Row	7	8469
4" Double Row	D5H	00016	07369		5" x 5/8"-11	Spiral Turbo	12	8464
5" Double Row	D5H	07370	07372		5" x 7/8"	Spiral Turbo	12	8467
7" Double Row	D5H	00018	07383					

Standard Gold and Heavy Duty Orange also available with special tall hubs







Cat #

84678

84692

84649

84677

Turbo cup crinders





DELUX-CUT Spiral Turbo General grinding and removal with Basic life					
SIZE	T5D Cat#				
4" x 5/8-11 (10 seg)	22419				
4-1/2" x 5/8-11(12 seg)	22435				
5" x 5/8-11 (9 seg)	42544				
5" x 7/8 (9 seg)	55613				
7" x 5/8-11" (12 seg)	22474				
7" x 7/8" (12 seg)	52140				

7" x 5/8-11 (24 seg)



• Spiral turbo for a fast grind

22453

UTILITY GREEN Spiral Turbo General grinding and removal with Good life								
SIZE T5G Cat # T5G Cat # (5/8"-11 hub) (7/8" hub)								
4" (9 seg)	94133	94134						
4" (18 seg)	94127	94128						
4-1/2" (9 seg)	94131	94132						
4-1/2" (18 seg)	94129	94130						
5" (14 seg)	09793	96471						
7" (12 seg)	94135	94136						
7" (24 seg)	94137	94138						

Star Blue

· Spiral turbo for a fast grind

STAR BLUE Spiral Turbo General grinding and removal with Good life							
SIZE T5B Cat #							
4" x 5/8-11 (10 seg)	00036						
4" x 7/8 (10 seg)	63135						
4-1/2" x 5/8-11(12 seg)	90079						
4-1/2' x 7/8 (12 seg)	63136						
5" x 5/8-11 (12 seg)	60853						
5" x 7/8 (12 seg)	63140						
7" x 5/8-11 (12 seg)	90193						
7" x 7/8 (12 seg)	63137						
7" x 5/8-11 (24 seg)	90359						
7" x 7/8 (24 seg)	63139						



faster grind

IMPERIAL PURPLE Spiral Turbo Fast grinding and removal with Very Good life						
SIZE T5I CAT #						
4" x 5/8-11 (12 seg) 16074						
5" x 5/8-11 (16 seg) 60151						
7" x 5/8-11 (18 seg)	16076					



For use on right angle grinders









Standard Cold

- · General grinding and medium removal with better life
- · Spiral turbo for fast, aggressive grinding

STANDARD GOLD Spiral Turbo							
SIZE T5S Cat # T5S Cat # (with 5/8"-11 hub) (with 7/8" hub)							
4" (9 seg)	17846	23177					
5" (12 seg)	19678	76901					
7" (12 seg)	16410	17834					
7" (24 seg)	15263	18641					

Heavy Duty Orange

- · General grinding and heavy removal
- Spiral turbo for fast, aggressive grinding
- · Very high quality diamond and longer grinding life

HEAVY DUTY ORANGE Spiral Turbo								
SIZE	T5H Cat # (with 7/8" hub)							
4" (9 seg)	17943	20710						
5" (12 seg)	69357	78871						
7" (12 seg)	15095	18155						
7" (24 seg)	15096	18396						

Standard Gold and Heavy Duty Orange Also Available With Special Tall Hubs



Part of the Core Prep Line of Products

PCD Cup Grinders

Polycrystalline Diamond allows aggressive removal of glue/epoxy and grout



Heavy Duty Dry Fing Turbo 3 bonds to fit your application

- Fine grit-smoothest finish
- Medium grit-basic grinding and removal
- · Coarse grit-heavy aggressive removal

HEAV	Y DUTY	Dry Ring	Turbo
SIZE	GRIT	BOND	Cat #
4" x 7/8"	Fine	KT5HF	35645
4" x 7/8"	Medium	KT5HM	26060
4" x 7/8"	Coarse	KT5HC	23329
4" x 5/8-11	Fine	KT5HF	19546
4" x 5/8-11	Medium	KT5HM	17539
4" x 5/8-11	Coarse	KT5HC	23051
7" x 5/8-11	Coarse	KT5HC	23154
7" x 7/8"	Coarse	KT5HC	31547

PCD Cup Grinders							
SIZE CAT # Application							
4-1/2" x 5/8-11	General Purpose epoxy removal						
7" x 5/8-11	General Purpose epoxy removal						

EPOXY & GLUE



PCD



For use on right angle grinders



LOW PROFILE FLOOR GRINDER 8" Head Capacity **Electric** • 2 HP Baldor-1PH, 115V, 16 amp motor · Remove paint, epoxy and rough spots · Easy to maneuver push drive · Slurry skirt keeps the machine on the grinding surface · 2800 rpm grinding head speed 8" Heavy Duty Orange grinding · Includes 50ft, 12 gauge extension cord

head included (Cat # 03330)



Low profile for hard to reach areas



Adjustable rear axle and heavy duty steel frame

CPC	CPG80E SINGLE HEAD LOW PROFILE FLOOR GRINDER								
Model #	Engine/Motor Type	Part #	Cat #	Head Capacity	Product Weight (Ibs.)				
CPG82E1-8	2HP-1PH-*115V or 230V Baldor® Electric	5801037	13317	8"	120				

^{*} Must specify 115V or 230V when ordering



- 10"/12" Head Capacity
- Remote throttle
- 2" dust port opening
- Single grease point
- Steel box frame
- Adjustable operator handles
- Lifting handles

- Adjustable wheel location for added grinding strength
- · Single head for fast, aggressive grinding
- · Greasing points are easily accessible
- Electric models include starter box
- · Includes 50 pound weight that maintains surface pressure

CPG100 SINGLE HEAD FLOOR GRINDER								
Model #	Engine/Motor Make	Engine/Motor Power	Power Source	Part #	Cat #	Head Capacity	Product Weight (lbs)	
CPG102E1	Baldor®	2 HP-1PH, 115V or 230V	Electric	5800727	13227	10"/12"	370	
CPG110H	Honda® GXV390	10.2 HP	Gas	5800726	13420	10"/12"	320	
CPG175E1	Baldor®	7.5 HP-1PH, 230V	Electric	5800828	15040	10"/12"	355	
CPG175E3	Baldor®	7.5 HP-3PH, 230V	Electric	5800829A	15048	10"/12"	370	
CPG175E3	Baldor®	7.5 HP-3PH, 460V	Electric	5800829B	14123	10"/12"	370	
	NOTE: Floor Grinders comes with one 65lb weight ballast (except for Model # CPG102E1)							
	Optional Second weight 2501047 47017 50							

CPC212 DUAL HEAD FLOOR GRINDER

ACCOMMODATES BOTH DIAMOND GRINDING HEADS, GRINDING BLOCKS, AND GRINDING PLATES WITH CORE-LOCK



Powered By:







Includes a 50 pound weight that maintains surface pressure



FEATURES

- · Remote throttle
- 2" dust port opening and water hose connection
- · Multiple grease point
- · Adjustable operator handles
- · Multiple lifting handles and single lifting point
- Dual head allows large 24" grinding area with two 12" heads
- · 4 rear axle positions and swivel axle
- Matches the height of the grinding head being used and allows for rapid change in weight distribution during grinding or transport
- Uses diamond grinding head, carbide blocks, grinding stones, and Core-Lock

	CPG200 DUAL HEAD FLOOR GRINDER								
Model #	Engine/Motor Make	Engine/Motor Power	Power Source	Part #	Cat #	Head Capacity	Product Weight (lbs)		
CPG210H	Honda® GXV390	10.2 HP	Gas	5801238	42874	(2)10"/(2)12"	530		
CPG202E1	Baldor®	2 HP-1PH, 115V or 230V*	Electric	5801235	42765	(2)10"/(2)12"	390		
CPG275E1	Baldor®	7.5 HP-1 PH, 230 Volt	Electric	5801236	42793	(2)10"/(2)12"	524		
CPG275E1	Baldor®	7.5 HP-3 PH, 230 Volt	Electric	5801237A	42802	(2)10"/(2)12"	560		
CPG275E3	Baldor®	7.5 HP-3 PH, 460 Volt	Electric	5801237B	42827	(2)10"/(2)12"	560		

NOTE: Each Floor Grinder comes with one 65 lb weight ballast (*excludes Model # CPG202E1)

Optional second weight 2501047 47017 --- ---

Note: Electric grinders do not ship with electric plug.

^{*} Must specify 115V or 230V when ordering Horsepower as rated by the engine manufacturer

³⁻Phase powered grinders do not include male electric connector for control box

CORE-LOCK SYSTEM

6-9lot





8" Grinding Plate

Fits Diamond Products' CPG80E and Diteq® grinders



For use on floor grinding machines.

10" Grinding Plate

Fits Diamond Products' CP100 & CPG200, Target, Husqvarna® and EDCO® grinders





	PLATES FO	OR CORE-LO	
Size	Number of Inserts	Part #	Cat #
8"	3	GP8000	05407
10"	6	GP10000	05409
12"	6	GP12000	05419



€

GRINDING BLOCKS & HEADS

Aluminum Disc Shown with Grinding Blocks

Diamond Segmented Grinding Block

Carbide Cutting Block


Grinding blocks have a bolt-on back which offers a more secure holding of the diamond grinding block.



nium eight-

*Designed for our dual head floor grinders. Recommended to replace all 6 blocks at the same time.

GB4000XT Super Premium Block-11mm segment heightextra long life

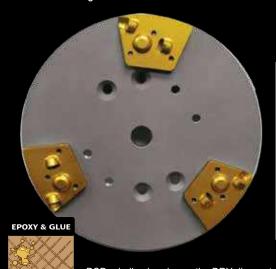

PCD grinding heads use the DRY discount. All other grinding heads use the Wet discount.

Floor Grinding Blocks

- · Grinding blocks designed for wet floor grinding
- · Can be easily re-segmented
- Set of three or six diamond blocks available that also work with competition-style floor grinders
- Works best for grinding high spots, preparation for new finished or polished concrete floors
- Made with top quality diamonds to ensure long lasting, fast grinding efficiency

	Dia	amond Grinding Blo	ocks
Part #	CAT#	Application	Spec
GB4000	39674	Hard Concrete, Non-Abrasive	GB64
GB4000	68323	General Purpose	GB66
GB4000	76121	Epoxy Mortar, Long Life	GB68
GB4000XT	40386	Super Premium, General Purpose	GBXT
Ter	razzo	Grinding-Contains	Diamonds
GB4000	43782	60 Grit	GB50T60
GB4000	60218	80 Grit	GB50T80
GB4000	45915	120 Grit	GB50T120
Grindir	ng Blo	ck Steel Shoe with	4 Segments
GB4000S	93642	Hard Concrete, Non-Abrasive	GB50
GB4000S	54071	Medium Hard Concrete	GB60
GB4000S	96260	Medium Concrete	GB64
GB4000S	96261	General Purpose	GB66
GB4000S	95837	Abrasive Materials	GB68
GB4000SV	33913	Extremely Hard Concrete (bolt on)	C19
GB4000SV	74985	Very Hard Concrete (bolt on)	C42
GB4000SV	33910	Hard Concrete (bolt on)	C51W
CCB4000	72741	Carbide Cutting Block	
CCBI4000	85627	Carbide Cutting Insert Only	
6041057	55473	Aluminum Disc-Right Side w/3 slot	
6041058	47862	Aluminum Disc-Left Side w/3 slot	
WEDGES	46872	Wooden Wedges for Holding Grinding Stones (See Abrasives Section)	

PCD Grinding

For epoxy and glue removal. Use in multiples on 8" or 10" grinding head.

For use on CORE CUT single or dual head floor grinders.



PCD Grinding Wing

	PCD	Grinding Heads
Part #	CAT#	Application
PCDWING	21751	PCD wing for grinding
TODWING	21701	(3 pieces per grinding head)
GH08PCD	13406	8" grinding head with 2 PCD grinding wings
GH10PCD	23758	10" grinding head with 3 PCD grinding wings
GH10PCDLEFT	54116	10" grinding head (Left) with 3 PCD grinding wings
CGPC4500	14986	4-1/2" x 5/8-11 PCD General Purpose Cup Grinder for epoxy,
001 04300	17300	glue & mastic removal
CGPC7000	21715	7" x 5/8-11 PCD General Purpose Cup Grinder for epoxy, glue &
CGI C7000	21713	mastic removal



For use on floor grinding machines.




To ensure maximum performance, water is required to cool grinding tools during the grinding process.

FLOOR GRINDING HEADS



Floor Grinding Heads

- Large 10" and 12" grinding heads that take the rough spots out of concrete surfaces in a hurry along with an 8" head for smaller units
- · Effective on floors, streets, highways, sidewalks and more
- Cleans, levels and smooths bumps and uneven areas
- Removes rain spots and epoxies
- For use on Core Cut floor grinders and other similar machines

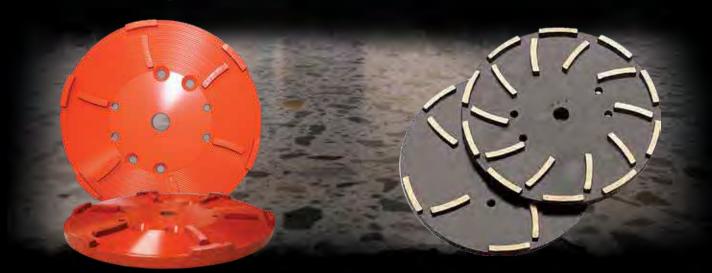

	DUTY OF Brinding He	
Material, Abrasive Level	8", 12 Seg Specification	CAT#
Hard, Non-Abrasive	GSH9	03330
Soft, Abrasive	GHH9	14317

10" HEAV Floor 0	Y DUTY O Brinding He	
Material, Abrasive Level	10", 12 Seg Specification	CAT#
Hard, Non-Abrasive	GSH10	11393
Soft, Abrasive	GHH10	23592
Material, Abrasive Level	10", 24 Seg Specification	CAT#
Hard, Non-Abrasive	GSH20	11401
Soft, Abrasive	GHH20	11398

Y DUTY O Brinding He	
12", 12 Seg Specification	CAT#
GSH12	69786
GHH12	76758
12", 24 Seg Specification	CAT#
GSH24	39534
GHH24	38541
	12", 12 Seg Specification GSH12 GHH12 12", 24 Seg Specification GSH24

	REMIUM B Grinding H	
Material, Abrasive Level	10", 12 Seg Specification	CAT#
Hard, Non-Abrasive	GSP10	11406
Soft, Abrasive	GHP10	20198
Material, Abrasive Level	10", 24 Seg Specification	CAT#
Hard, Non-Abrasive	GSP20	00019
Soft, Abrasive	GHP20	11410

	EMIUM BI Grinding H	
Material, Abrasive Level	12", 12 Seg Specification	CAT#
Hard, Non-Abrasive	GSP12	41193
Soft, Abrasive	GHP12	41194
Material, Abrasive Level	12", 24 Seg Specification	CAT#
Hard, Non-Abrasive	GSP24	39164
Soft, Abrasive	GHP24	40051










For use on floor grinding machines.





DIAMOND GRINDING INSERTS

Core-Lock System


CORE-LOCK Diamond Segmented **Grinding Inserts**

- Good diamond quality for aggressive removal also great for removing epoxy and paint
- Used in sets of three and available in single or double segments
- For use on floor grinding heads on walk behind machines
- Core-Lock System allows quick installation and worry-free performance























	SINC Inse	LE Segmei ert Medium	nt Grinding Concrete
тп	Grit	Core-Lock Part #	Core-Lock Cat #
	16	GMS2016	69429
뭐	25	GMS2025	69462
ij	40	GMS2040	70169
3	80	GMS2080	69818
뮝	150	GMS2150	70241
_ i			

DIAMOND



	Gri	DOUBLE Sending Inser	Medium
	Grit	Core-Lock Part #	Core-Lock Cat #
3	25	GMD2025	70249
	40	GMD2040	70610
	80	GMD2080	70810
	150	GMD2150	71021



	SING	ELE Segmer ert Extrem Concre	ely Hard
	Grit	Core-Lock Part #	Core-Lock Cat #
	25	GXS4025	00164
3	40	GXS4040	03180
	80	GXS4080	12390
Į	150	GXS4150	16201
-			



150 GXS4150 16201 16
Hard Concrete
Grit Core-Lock Part # Core-Lock Cat # 25 GXD4025 25839 40 GXD4040 30043
25 GXD4025 25839 40 GXD4040 30043
4 0 GXD4040 30043
80 GXD4080 30309
150 GXD4150 30485



PCD inserts are used to aggressively remove heavy or thick mastics, such as glues and grouts. PCD inserts quickly level high spots on concrete.

CORE-LOCK PCD Grinding Inserts				
Description	Part #	Cat #		
PCD Insert for Core-Lock Grinding Plate, Right Handed	PCDSHOE	101406		
PCD Insert for Core-Lock Grinding Plate, Left Handed	PCDSHOELH	101405		

DIAMOND GRINDING INSERTS For HTC® Machines





HTC® Compatible Part numbers shown are for sets of 3.

Diamond Segmented Grinding Segments for HTC[®] Machines

- Good diamond quality for aggressive removal also great for removing epoxy and paint
- Used in sets of three and available in single or double segments
- For use on HTC grinding machines

	Single Segment Grinding Insert Soft Concrete			
Grit Part # (HTC® Cat # (HTC Compatible) Compatible				
囘	25	GHSS1025	45020	
	40	GHSS1040	45084	
넗	80	GHSS1080	45121	
Ž	150	GHSS1150	45142	

9	Doubl	e Segment G Soft Cond	rinding Insert crete
	Grit	Part # (HTC [®] Compatible)	Cat # (HTC [®] Compatible)
שׁ	25	GHSD1025	45158
	40	GHSD1040	45184
	80	GHSD1080	45251
	150	GHSD1150	45307

	SINGLE Segment Grinding Insert Hard Concrete				
	Grit	Part # (HTC [®] Compatible)	Cat # (HTC [®] Compatible)		
	16	GHHS3016	46085		
25		GHHS3025	46194		
ij	40 GHHS3040		46243		
ä	80	GHHS3080	46369		
Z	150	GHHS3150	46385		
יע					

н	100	0111100100	40000		
Ö			- 0 5 5		
O	DOUBLE Segment Grinding				
n		nsert Hard C	Concrete		
囮	C-::4	Part # (HTC®	Cat # (HTC®		
HARD	Grit	Compatible)	Compatible)		
25	16	GHHD3016	46386		
	25 GHHD3025		46387		
	40	GHHD3040	46391		
	80	GHHD3080	46392		
	150	GHHD3150	46393		

	SINGLE Segment Grinding Insert Medium Concrete		
SOMORATION	Grit	Part # (HTC® Compatible)	Cat # (HTC® Compatible)
	16	GHMS2016	45386
	25	GHMS2025	45426
	40	GHMS2040	45470
	80	GHMS2080	45499
	150	GHMS2150	45742
_ !			

	DOUBLE Segment Grinding Insert Medium Concrete				
回回	Grit Part # (HTC® Compatible)		Cat # (HTC® Compatible)		
2	25	GHMD2025	45791		
	40	GHMD2040	45896		
	80	GHMD2080	45942		
	150	GHMD2150	45952		

	SINGLE Segment Grinding Insert Extremely Hard Concrete				
떙	Grit	Part # (HTC® Compatible)	Cat # (HTC® Compatible)		
7	25	GHXS4025	46398		
윎	40	GHXS4040	46399		
	80	GHXS4080	46401		
붑	150	GHXS4150	46496		

Y HA		BLE Segment C Extremely Hard	Brinding Insert Concrete
	Grit	Part # (HTC® Compatible)	Cat # (HTC® Compatible)
	25	GHXD4025	46524
ď	40	GHXD4040	46533
K	80	GHXD4080	46539
⑪	150	GHXD4150	46550

HTC® is copyright of HTC Group and in no way affiliated with Diamond Products Ltd.

GRINDING SHOE GRIT COLOR CODES:

Applies to both CORE-LOCK and HTC Inserts

16 GRIT

25 GRIT 40 GRIT 80 GRIT 150 GRIT



For use on HTC floor grinding machines.



To ensure maximum performance, water is required to cool grinding heads during the grinding process.

CPST1415E1FLOOR STRIPPER (BULL)

The CPST1415E1 is an innovative, compact and powerful floor stripper. Its extra strong design in combination with the relatively low weight enables the peeling and removal of carpets, vinyl floors and many other floor coverings. Thanks to the four <u>detachable front weights</u>, the CPST1415E1 can be adapted to the different floor conditions and easily brought to the job site.



Directly driven impact mechanism with low maintenance and reliable performance



Ergonomically designed handle bars with control unit including dead man's switch





Bull Chisel & Holder



Carpet Cutter

CPST1415E1 ACCESSORIES Description Part # Cat # Blade Bull - U-Shape Sharp 350x80x1.5mm 2509451 113585 Blade Bull - 350x130x1.5mm 2509452 113586 Blade Bull - 350x80x1.5mm 2509453 113587 Blade Bull - 350x80x2.5mm 2509454 113588 Blade Bull/Mule/Ox - 250x80x1.5mm 2509797 113589 Blade Bull/Mule/Ox - 250x80x2.5mm 2509798 113590 Blade Bull - U-Shape 350x80x1.5mm 2509805 113591 113592 Chisel 25mm 2509449 Chisel Holder 113593 2509448 Carpet Cutter Holder 2509806 113594 2509807 113595 Carpet Cutter

CPST1415E1

13.77" Scrape Width

FEATURES:

- Direct drive manual or auto travel
- Forward weight helps with material removal
- · Height-adjustable
- Protective cover helps prevent flying pieces
- Integrated weights adjustable to 3 positions
- Ergonomically designed handle bars

CPST1415E1 FLOOR STRIPPER

Model #	Part #	Cat #	Product Weight (lbs)
CPST1415E1	5802006	112185	518

CPST1415E1

Voltage / Frequency	110V / 60 Hz / 16.4A
Power	1.5 HP
Current Consumption	8.8 Amp
Speed (drive motor)	2820 RPM
Vacuum Connection	1-1/2"
Application	Dry
Length	30.7"
Width	19.68"
Height	43.7"



FEATURES:

- Available in gas or electric
- · Height adjustment by hand wheel
- Quick lift lever and easy to maneuver
- Belt tensioner with durable toothed belt
- Vacuum connection
- Works great with the CORE VAC CV353B

CORE PREP SCARIFIERS				
Model #	Motor/Engine Make/Model	Part #	Cat #	Product Weight (lbs)
CPS83E1	Electric	5802001	112186	134
CPS848G	Honda	5802002	112187	134

CPS83E1 (formerly CT250), CPS848G (formerly CT250P)



Complete Drum with Carbide Cutters



Carbide Cutters

SCARIFIER SPECIFICATIONS

Model	CPS83E1 Electric (Push)	CPS848G Gas (Push)
Power	230V / 60 Hz / 1PH 3HP	4.8 HP
Tool Speed	1750 RPM	1917 RPM
Vacuum Connection	2"	2"
Application	Dry/Wet	Dry/Wet
Length	39.3"	39.3"
Width	14.56"	14.56"
Height	39.3"	39.3"

SCARIFIER ACCESSORIES				
Description	Part #	Cat #		
Complete Drum with Cutters	2509455	112757		
Drum Only	2509542	113605		
Cutter Only 45/5	2509543	113614		
Complete Drum with Milling Cutters 42/10	2509828	113778		
Complete Drum with Edger 45/10	2509831	113773		
Complete Drum with Edger 45/5	2509830	113772		
Edger only	2509829	113771		



CPS1320E3

13-1/4" Milling Width (with diamond) 12-1/2" Milling Width (with cutter drum) 20HP Electric

CPS1335G

13-1/4" Milling Width (with diamond) 12-1/2" Milling Width (with cutter drum) 35HP Gas

CPS1325LCE3 12-1/2" Milling Width Low Chassis 25HP Electric

SCARIFIER - WIDE GRIND SPECIFICATIONS

Model/Series	CPS1320E3 Electric Self-Propelled	CPS1335G Gas Self-Propelled	CPS1325LCE3 Electric Low Chassis Self-Propelled
Power	460V / 60Hz / 3PH 20 HP	35HP	460V / 60H / 3PH 25 HP
Milling Width	12-1/2" wi/diamond 13-1/4" w/cutter drum	12-1/2" wi/diamond 13-1/4" w/cutter drum	12-1/2"
Vacuum Connection	2-3/4"	2-3/4"	2-3/4"
Application	Dry	Dry	Dry
Length	46-1/2"	46-1/2"	46-1/2"
Width	25"	26"	25"
Height	38-1/2"	43-1/4"	38-1/2"
Weight	652	588	652
Part Number	5802003	5802004	5802005
Catalog Number	112188	112190	112189

SCARIFIER CPS1300 SERIES ACCESSORIES

CHOOSE THE RIGHT TOOL FOR YOUR CONSTRUCTION PROJECT

- Equip your machine with the classic carbide tipped cutter tools for substrate preparation and the precise removal of concrete. Use a milling cutter for removing highly flexible adhesives or leveling compounds and for stripping coatings and thermoplastic.
- · Use our diamond tools to create channels and joints. Cut channels for specific floor guidance systems or create the basis for special markings in the desired width. Load your diamond drum according to a specified matrix and create enormous slip resistance on stable floors, dairy farming stalls, footpaths or access ramps.



CARBIDE TIPPED CUTTER DRUM



Part # 2509458



CONCRETE



DRUM



Part # 2509832





ASPHALT



MILLING DRUM WITH PCD PLATES







DECOATING DEMARCATION





Drum Only Part # 2509459 Blade Cat # 113402

<u>Spacers</u> 1mm - Part # 2509470

2mm - Part # 2509469

3mm - Part # 2509462

5mm - Part # 2509463 8mm - Part # 2509691





PROFILE CUTTING



CV353B **Electric**

CORE VAC DUST CONTAINMENT VACUUMS			
Description	Part #	Cat #	
CV353B HEPA Vacuum (Bag Style) with special hose for scarifiers	4244148	113814	
CVG1-PRO HEPA Large Vacuum with 3" hose	5801911	112329	
Bag, Continuous (plastic)	4600172	84935	

CV353B SPECS

Volts	230V
Motor	19.5 amps
CFM	353 CFM
Dimensions	26"W x 26"L x 46"H
Hose Length	37 ft.

CV1-PRO SPECS

Power	6.5HP
Motor	Briggs Vanguard
CFM	1004 CFM
Dimensions	28"W x 34.5"L x 59"H
Hose Length	37 ft.



CVG1-PRO Gasoline For large collection jobs



Telescoping handle adjusts to operator's height



CC150XL-EE Includes
vacuum attachment guard
plate that can
connect to the CORE VAC™
line of vacuums.

6.5^p Elade Capacity Electric Casoline



Up-cut design

Spring loaded skid plate or 'blade block' that keeps the skid plate down on the surface to help prevent spalling

4.8HP

Honda Gasoline

FEATURES

- Reliable skid plate system for green concrete
- Spring-loaded skid plate that stays down on the surface to help prevent spalling
- · Heavy duty design but light weight enough for two people to lift
- · Fully adjustable handle bars for operator comfort
- · Five wheels under the frame for increased stability
- · Cyclone air filter for increased air flow
- Up-cut design to keep debris from going back in the cut
- · Blade raise/lower mechanical mechanism with spring loaded release
- · Single ribbed drive belt
- · Includes vacuum attachment guard plate

CC150XL-EE SPECIFICATIONS

Max. Depth of Cut	1.5" with 6.5" diameter blade
Blade Shaft RPM	4020
Blade Shaft Diameter	1-1/4"
Arbor Size	1"
Depth Indicator	Standard
Dimensions	16.94" wide, 21.80" tall, 32.92" long

CC150XL-EE EARLY ENTRY SAW					
Model #	Engine Make/Model	Engine Power	Part #	Cat #	Product Weight (lbs)
CC125BXL-EE6	Baldor Electric	2.5 HP	5801357	07789	120
CC148HXL-EE6	Honda® GX160	4.8 HP, 7.6 Torque (lbsft.)	5801345	32739	100
CC165BVXL-EE6	Briggs® Vanguard	6.5 HP	5801346	32747	105

Horsepower as rated by the engine manufacturer.

<mark>C190PRO•≡≡</mark> FIRST-CUT™ SAW



Powered By:

PROFESSIONAL GRADE PERFORMANCE







CC190PRO-EE with CVG1-PRO hose attached to side vacuum plate

Spring loaded skid plate or 'blade block' that keeps the skid plate down on the surface to help prevent spalling

14" Blade Capacity

FEATURES

- Capable of .110" to .250" thick blades
- · Self propelled drive
- · Raise and lower adjustable handle bars
- · Heavy duty handle design
- Vacuum port plate for easy dust control
- · Vibration dampeners that prevent rattling that disrupts the skid plate function
- · Self aligning blade shaft bearings
- · Easy access to battery with heavy duty isolator switch to prevent power drain
- · Up-cut design to keep debris from going back in the cut
- · Lifting hook for easy transport

Includes: Electric start, low oil alert and tach/hour meter, pointer arm cable kit

SPECIFICATIONS

Up-cut Design

1-5/8" with 10" blade Max. Depth of Cut 2-5/8" with 12" blade 3-5/8" with 14" blade Blade Shaft RPM 3500 **Blade Shaft Diameter** 1-1/4" 1" with single drive pin **Arbor Size**

Blade Raise/Lower Electric actuation

Eaton Model 6 Transmission

Drive Speed 0-80 feet per minute



Use the Core Vac CVG1PRO Vacuum for the CC190FC saw. Includes Hoses.

CC190PRO-EE EARLY ENTRY SAW					
Model #	Engine Make/ Model	Engine Power	Part #	Cat #	Product Weight (lbs)
CC190PRO-EE	Honda® GX630	20.8 HP, 35.6 Torque (lbsft)	5801128	13364	420

CC190PRO-EE OPTIONS				
Description	Part #	Cat #		
CVG1-PRO containment vacuum for CC190PRO-EE with hoses - dry only	5801910	111653		
Pointer Arm Cable Upgrade Kit (Pre-2025 Units)	6041964	111785		
Vacuum adapter 3" to 5" (manifold assembly 1" - 3" port)	2504846	82102		
Spot Light Kit	6047720	78751		

Horsepower as rated by the engine manufacturer.

EXPERT FIRST-CUT" DIAMOND BLADES



SPECIFICATIONS		
Specifications & Specificaiton Color Code	Aggregate Hardness & Map Color Code	
EXPERT1000-Purple	Very Hard	
EXPERT2000-Green	Hard	
EXPERT3000-Red	Medium Hard	
EXPERT4000-Orange	Medium	
EXPERT5000-Yellow	Medium Soft	
EXPERT6000-Black	Soft	
EXPERT7000 Blue	Very Soft	

EXPERT QUALITY GRADE:

Very long cutting life expectation in green concrete with professional performance.

Consider the **Aggregate Hardness** based on aggregate found in your area and cure time before determining the bond specification. Aggregate hardness can be determined by the aggregate map found at the back of this booklet.

Specification Color Codes follow common industry codes for bond specifications.



First-Cut blades Include a 1" arbor with drive-pin hole and triangle knock-out. Diamond Products' saws have 1" arbors where some competitor saws have an arbor that accepts the triangle knockout.



Joint Protectors

- 2" long x 1/2" wide x 1/8" thick
- Used when making cross-cuts in green concrete
- Prevents joint collapse when cutting across another cut

Bag Quantity	Part #	Cat #
50	JOINTPRO-50	17145
150	JOINTPRO-150	107856



FOR USE ON FIRST-CUT™ OR COMPETITOR SAWS ON GREEN CONCRETE

BEVEL

- Cleans spalled joints
- Makes decorative finish joints
- Creates a better reservoir for applying joint fillers
- · Beveled edges for protecting joints





Special Skid Plate for V-Bevel Blades

Universal skid plate that fits Diamond Products and competitor saws

Profile View of V-Bevel Blade

	ĺ	
Diamond rim	Arbor	Diamond rim

First-Cut Bevel V-Blades									
Size/Description	Part #	Cat #							
6" x .375" (3/8") x 1"	CVBFC06375	106720							
6" x .625" (5/8") x 1"	CVBFC06625	106721							
Skid Plate Kit*	6052020	106928							
Universal Snap-On Skid Plate Only for V-Bevel Blade	2505482	106638							

*Includes UNV V-Bevel skid plate, spring block cap, screws and nuts for use on CC150XL to keep the saw at a constant depth for V-Bevel cutting.

EXPERT FIRST-CUT™ BLADE PACKAGES



	EXPERT - VERY HIGH QUALITY, LONGER LIFE Individual Blade Only - No Skid Plate											
SIZE	EXPERT1000 Purple Cat #	EXPERT2000 Green Cat #	EXPERT3000 Red Cat #	EXPERT4000 Orange Cat #	EXPERT5000 Yellow Cat #	EXPERT6000 Black Cat #	EXPERT7000 Blue Cat #					
AGGREGATE	VERY HARD	HARD	MED HARD	MEDIUM	MED SOFT	SOFT	VERY SOFT					
6" x .095	66117	67330	57526	68407	69019	56798						
6.5" x 100	90411		103521									
8" x .100	67332	67331	68352	68328	68380	68331						
10" x .110	68782	67318	55816	68498	51150	56801						
10" x .250	108943	108944	68335	68417	108945	108946						
12" x .080	101118		106824	106814			111315					
12" x .125	67326	67325	57524	68512	90673	52597						
12" x .250	70590	68507	68590	68515	68475	70118						
13.5" x .125	68438	67329	67898	69554	68378	69690						
13.5" x .250	69159	70166	69328	69853	68434	68384						
14" x .125	68394	68392	57525	68518	51156	51177						
14" x .250	68521	70559	68526	68469	68351	69770						

Blade	EXPERT BLADE PACKAGES Blades With Universal Snap-On Skid Plate for DIAMOND PRODUCTS SAWS												
SIZE	Includes Skid Plate #	EXPERT1000 Cat #	EXPERT2000 Cat #	EXPERT3000 Cat #	EXPERT4000 Cat #	EXPERT5000 Cat #	EXPERT6000 Cat #	EXPERT7000 Blue Cat #					
AGGRE	GATE	VERY HARD	HARD	MED HARD	MEDIUM	MED SOFT	SOFT	VERY SOFT					
6" x .095	2505481	64145	64147	64149	64150	64155	64156						
6.5" x .100	2505481	106266	-	107670	-								
10" x .110	2505485	106298	106299	106300	106301	106302	106303						
10" x .250	2505489	106304	106308	106309	106310	106311	106312						
12" x .080	2505485	106313	-	107224	107669			108302					
12" x .125	2505485	106154	106156	106162	106164	106166	106168						
12" x .250	2505489	106155	106157	106163	106165	106167	106169						
13.5" x .125	2505485	106314	106315	106316	106317	106318	106323						
13.5" x .250	2505489	106324	106326	106327	106328	106329	106330						
14" x .125	2505485	64557	64558	64559	64561	64562	64566						
14" x .250	2505489	64584	64585	64590	64597	64598	64599						

E	EXPERT BLADE PACKAGES Blades With Universal Snap-On Skid Plate for COMPETITOR SAWS												
SIZE	Includes Skid Plate #	EXPERT1000 Cat #	EXPERT2000 Cat #	EXPERT3000 Cat #	EXPERT4000 Cat #	EXPERT5000 Cat #	EXPERT6000 Cat #	EXPERT7000 Blue Cat #					
AGGRE	GATE	VERY HARD	HARD	MED HARD	MEDIUM	MED SOFT	SOFT	VERY SOFT					
6" x .095	2505481	64145	64147	64149	64150	64155	64156						
6.5" x .100	2505481	106266		107670									
8" x .100	2505481	64208	64210	64212	64216	64217	64218						
10" x .110	2505483	64288	64289	64290	64293	64296	64298						
10" x .250	2505487	64349	64351	64353	107671	107672	107673						
12" x .080	2505484	104049	-	106805	112685			107589					
12" x .125	2505484	64389	64390	64402	64417	64418	64419						
12" x .250	2505488	64449	64451	64452	64453	64458	64460						
13.5" x .125	2505484	64488	64489	64493	64494	64495	64498						
13.5" x .250	2505488	64532	64533	64535	64541	64543	64544						
14" x .125	2505485	64557	64558	64559	64561	64562	64566						
14" x .250	2505489	64584	64585	64590	64597	64598	64599						



L8TR BLADES & SKID PLATES



L8TR Blade

We know your jobs are unpredictable and things happen. If you missed cutting green concrete within the two hour Control Zone, don't worry, we've got you covered - even the next day.



9mm segment design for fast cutting and 14" includes radius drop segment wear protection

Designed for use on our First-Cut™ early-entry saw line or competition saws.

First-Cut L8TR Blades						
Size	Cat #					
6" x .095 x 1"	104440					
12" x .125 x 1"	104441					
13.5" x .125 x 1"	111050					
14" x .125 x 1"	104442					

SPECIFICATION

LSTR - Fast cutting in green concrete after the Control Zone

UNIVERSAL Snap-On Skid Plates Fit Diamond Products Saws and Competitor Saws.

Universal Skid Plate Features

- · Stainless steel construction
- Snap-on, clip style that fits on Diamond Products First-Cut saws and competition saws
- 1/8" thick bottom plate allows skid to be used for 2-3 blades before requiring replacement depending on the abrasive properties of the aggregate and the diameter of the blade
- Steel mounting pins that won't break or fail like some cast aluminum competitor mounts
- · Mounted with a locking pin to keep the plate in place
- · Fits both steel and cast skid plate saws



ALWAYS CHECK SKID PLATE BEFORE SAWING!

Look for wear at these highlighted areas on the bottom side of the skid plate. If the slot is no longer a straight line, you must replace the skid plate.

This wear is typically seen every 2 to 3 blade lives depending on the aggregate type.

When Used with Hard Aggregate:

Blades in hard aggregate have shorter life so the skid plate will last longer. This holds true for diamond blades. They wear out faster, which leads to less skid plates being needed due to less abrasion wearing on the steel skid plate.

When Used with Soft Aggregate:

Blades in soft aggregate last longer so the skid plates wear out with fewer blades. Blades specifications for soft aggregate are typically hard, which results in more skids plates being needed due to more abrasion on the steel skid plate.

UNIVERSAL SNAP-ON SKID PLATES - FOR .125 & .250 THICK BLADES										
Description	.125 Part #	.125 Cat #	.250" Part #	.250" Cat #						
Skid Plate for 6" and 8" Blades	2505481	105295	2505486	107475						
Skid Plate for 10" Blades	2505483	107039	2505487	107476						
Skid Plate for 12" and 13.5" Blades	2505484	107040	2505488	107477						
Skid Plate for 14" Blades	2505485	107041	2505489	107478						



TRUE EARLY ENTRY™

System Components:

- First-Cut[™] EXPERT blade
- First-Cut[™] saw with skid plate guard system
- Optimal Time of Cutting-Known as the Control Zone[™]
 (2 hours after finishing and before final set)




WHAT ARE TRUE EARLY ENTRY™ CONTROL / RELIEF JOINTS?

As concrete is placed and being finished, chemical reactions begin to take place causing the slab to increase in temperature. Stress, caused by shrinkage, begins to accumulate rapidly. At this time the concrete is looking for relief. If not relieved in a timely manner the concrete will relieve itself, resulting in random cracks appearing across the surface of the slab.

Byplacing **True Early Entry™** joints at the appropriate spacing (normally 10' to 12' apart) the concrete finds the relief its looking for and cracks directly beneath the cut.

The timing of **True Early Entry™** joints are critical! Controlling random cracking is all about the timing of the cut, not the depth of the cut. Cuts must be placed between the initial set and the final set of the concrete. This **CONTROL ZONE™** is the optimal cutting time to give concrete relief when it is looking for it the most.



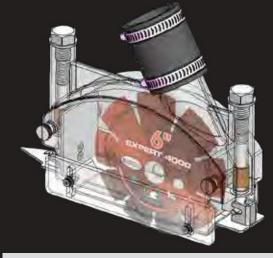


First-Cut[™] Skid Plate Guard System

Our First-Cut saws utilize a skid plate guard system that protects concrete spalling during the cut. A spring-loaded skid plate holds it down and keeps aggregate from pulling out of the slab. The guard system is low-maintenance and heavy duty to withstand extended use on the job.

Why You Need to Use the True Early Entry™ System


Uncontrolled Cracks

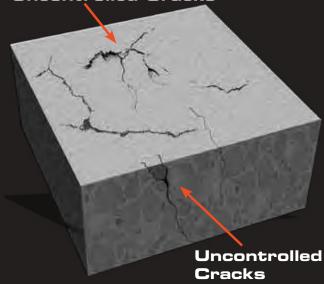

Concrete Without Control/Relief Joint


Without a control or relief joint made into the material, heat and cold aligned with curing can cause expanding and contracting of the concrete, creating uncontrolled cracks throughout. Those cracks will eventually create ruptures and sections that can pull apart from the rest of the material.

Control/Relief Joint

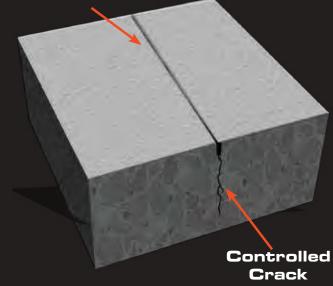

Concrete With Control/Relief Joint

Making a controlled cut in the concrete CONTROLS where the cracks appear. When this procedure is done in determined spaced sections, the damage and cracking is kept at a minimum which prolongs the life of the concrete slab.

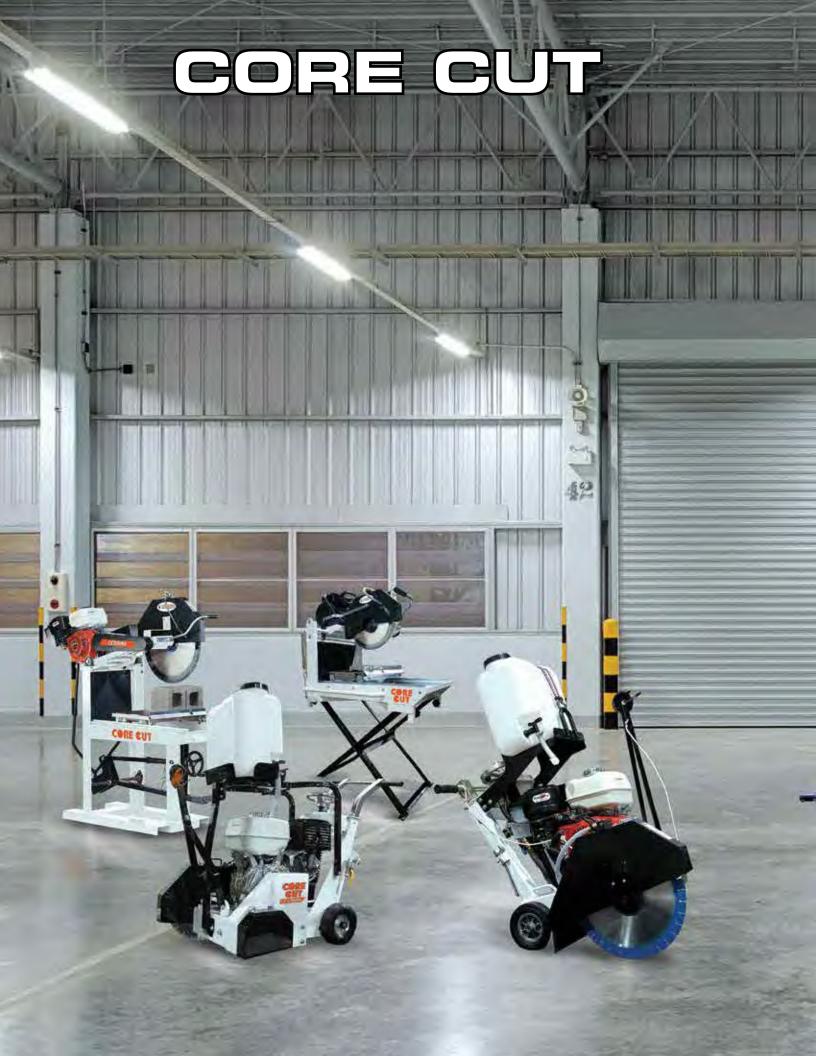





7" Blade Capacity Electric

FEATURES

- 1-3/4" maximum cutting depth
- · Easy to clean water tray
- · Liquid cooled bearing housing
- Rip cut up to 17", diagonal cut to 12"
- Includes 45° and 90° rip guide/miter block
- Automatic thermal overload protection prevents power surges and overheating
- 1 HP carbon brush motor gives 6,000 RPM at the blade shaft

9" Blade Capacity Electric

FEATURES

- 800 watt, 120 volt single phase electric motor
- Maximum cutting depth of 1-7/8"
- · Heavy duty table with measuring guide
- Angle guide plate holds the work piece at various angles
- Easily-adjustable cutting guide remains parallel at all times
- Easy mounting water tray
- Safety relay switch
- Quick-release, tool-free table mount release for easy cleaning and blade replacement
- Easy adjustment miter up to 45 degrees with 1-7/16" depth
- Includes parallel cutting guide, angle guide plate, M8 combo wrench and M19 combo wrench

CC600T TILE SAW											
Model #	Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs)	Dimensions				
CC600T	1 HP	Electric	5800558PKG	65019	7"	43	33"L x 20"W x 16"H				
			CCS	12T	S TILE SAW						
Model #	Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs)	Dimensions				
CC912TS	3/4 HP	Electric	5801608PKG	79575	9"	34	26"L x 21"W x 13"H				



Miter Block
Included with CC600T tile saws



180° Angle Guide For CC1000T tile saws



45°/90° Rip Guide For CC900TE tile saws



Water Pump
Included with all table top tile saws
(2.5 gpm)

TILE SAWS

CCTOOOT



CCOOOMY

CC1000T SUPER DUTY

CC900TE

10" x .060 x 5/8"
Delux-Cut Tile Blade
Included

10" x .060 x 5/8" Delux-Cut Tile Blade Included

10" Blade Capacity Electric

FEATURES

- 3-3/4" cutting depth
- 1-1/2 HP, 15amp, 115V high torque motor
- Rip cut up to 20", diagonal cut to 14"
- · Plastic tray can be removed for cleaning
- · Replaceable liquid cooled bearing housing
- Blade guard includes brush for additional blade cooling protection and over spray
- Includes 45° and 90° rip guide/miter block

10" Blade Capacity

FEATURES

- 3-3/4" cutting depth
- 1-1/2 HP, 15amp, 115V high torque motor
- · Rip cut up to 24", diagonal cut to 18"
- · Rigid, heavy duty steel frame
- Replaceable liquid cooled bearing housing
- Cutting tray/cart uses ball bearing wheels for smooth movement and accurate cutting
- Blade guard includes brush for additional blade cooling protection and over spray
- Includes 45° and 90° rip guide/miter block

	CC900TE TILE SAW											
Model #	Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs)	Dimensions					
CC900TE	1-1/2 HP	Electric	5800559PKG	65020	10"	98	39"L x 24"W x 24"H					
	CC1000T TILE SAW											
M . 1 . 1 #	Motor	Power	D. 1.#	0.14	Blade	Product Weight	D'					

Model #	Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs.)	Dimensions			
CC1000T	1-1/2 HP	Electric	5800572PKG	72483	10"	115	43"L x 26"W x 24"H			

TILE SAW ACCESSORIES & OPTIONS

Description	Part #	Cat #
Water Pump	6030060	46817
45°/90° Rip Guide	6043002	57689
180° Angle Guide	6043004	57691
Miter Block CC900TE & CC1000T	6043043	60885
Miter Block CC600T	6043096	81771
Optional Folding Stand for CC600T	6043383	80419
Optional Folding Stand with Wheels	6043528	03734



Optional Folding Stand with Wheels

Scissor stand that fits the CC900TE, & CC1000T tile saws



MASONRY

WHAT IS MASONRY?

Masonry describes both the material and the process of creating surfaces and structures from bricks, stone and block. These masonry units are bonded together by mortar, all of which are made up of different shapes and materials.

BRICK



Burnt Clay Brick

Clay that has been fired in a kiln.
The most common brick.
Hardness factor: **MEDIUM**



Fly Ash Brick

Lightweight and stronger than clay, includes fly ash, quicklime, cement aluminum powder and gypsum. Hardness factor: **MEDIUM HARD**



Sand Lime Brick

Also known as calcium silicate brick. Made of sand, lime, water and pigment and has a high compression strength.

Hardness factor: HARD



Concrete Brick

Cement poured into forms and compressed for added strength.

Hardness factor: SOFT ABRASIVE



Engineering Brick

Burnt clay bricks but with added features for good load bearing capacity. Sometimes include reinforcement.

Hardness factor: MEDIUM HARD



Refractory Brick

Also known as fire brick. This extremely hard brick is used in kilns, fireplaces, and ovens which can withstand high temperatures. Composed of clay containing alumina and silica.

STONE



Ashlar Stone Masonry

Ashlar is finely dressed stone, either an individual stone that has been worked until squared, or a structure built from such stones.



Rubble Masonry

Undressed, rough stone with wider joints than ashlar stone masonry. Also called random rubble masonry. Stones are no uniform in shape or size.

CONCRETE BLOCK



Concrete Block

Made from poured concrete into forms and compressed for added strength. Many different shapes and sizes can be made depending on the forms being used. Found in many school and city buildings. Very abrasive and can be used for sharpening a diamond tool when glazed.

MORTAR TYPES

MEDIUM HARD - Cement Mortar - Mixture of cement, sand and water. Most common form of strong bonding.

<u>HARD - Lime Mortar</u> - Uses any kind of lime mixed with sand and water. This is typically used in reconditioning old buildings and best used for a stronger hold.

<u>MEDIUM - Mud Mortar</u> - The most cost-efficient method for bonding masonry. Mud is mixed with straw for reinforcement and is best used on bricks than stone masonry.



FEATURES

- · The most cost-efficient way to cut masonry
- Cuts 5" deep with 14" blade
- Powerful 3 HP electric motor
- · Durable frame design
- · Tool-free air filter replacement
- · Longer motor life due to a superior foam air filter
- · Includes 2 spare air filters
- · Smooth sliding material cutting table
- · Cutting head is pulled down into the material

CC300M ELECTRIC MASONRY SAW Product Blade Model # **Motor Power** Part # Cat # Weight Capacity (lbs.) 3 HP-115 Volt CC300M 5800730 84807 14" 85 15 amp

CC300M SPECIFICATIONS

Power Supply	115V/60Hz
Motor Power	3 HP (at peak)
Amp Draw	15 amp
RPM	3600
Max. Depth of Cut	5"
Max. Length of Cut	16"
Material Capacity	8" x 8" x 16"
Dimensions	23" wide, 24" tall, 28" long

CC300M OPTIONS

Description	Part #	Cat #
Folding Stand for CC300M	6043056	84808
Wet Cut Kit for CC300M	6043058	90644
Rip Guide	6043002	57689
180º Adjustable Angle Guide	6043004	57691





14" Blade Capacity Gasoline **Electric**

FEATURES

- · Stay level blade guard
- Removable cutting head
- Leg kit standard-folding stand optional
- Side carrying handles
- Replaceable conveyor cart rails
- Includes water pump
- · Vulcanized rubber coated material slide cart
- · Easy and safe access to depth control lock
- · Open back cutting allows longer material to be cut
- Heavy duty frame design help resist damage to saw body
- · Reinforced slide rails keep the cart running smoothly
- · Simple yet strong design allows easy maintenance
- Sealed drain hole on the bottom of the tray allows quick clean up

CC500MXL2 SPECIFICATIONS

Max. Depth of Cut	5"	
Max. Cutting Capacity	18" length	
Blade Shaft Diameter	.875"	
Arbor Diameter	1"	
Blade Shaft Bearings	Flange block ball bearings	
Blade Shaft Drive	2 belt	
Blade Mounting	Right (electric), Left (gas)	
Blade Raise/Lower	Counterbalanced, spring tensioned head pivots on two .875" flange block bearings	
Blade Coolant	Dual spray tubes, pump fed (electric models), pump from tray (gas models)	
Air Filter	3-stage cyclone (gas models)	
Fuel Capacity	1 gallon (gas models)	
High Temp Shut-off	Included (electric models)	
Dimensions	24.750" wide, 58.375" tall, 34" long	

- ow <mark>Amperage on Electric Models:</mark> 1.5HP Model Standard Draw 13.4 Amp
- · 2.0HP Model Standard Draw 15.8 Amp · 2.5HP Model Standard Draw 21 Amp

CC500MXL2 MASONRY SAW

	CC500MXL2 MASONRY SAW						
Model #	Motor/Engine Make	Motor/Engine Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs)
CC515MXL2E1	Baldor®	1.5 HP-1PH-115/230V	Electric	5800799	03725	14"	215
CC520MXL2E1	Baldor®	2.0 HP-1PH 115/230V	Electric	5800814	08667	14"	227
CC525MXL2E1	Baldor®	2.5 HP-1PH-115/230V	Electric	5800801	03726	14"	228
CC548MHXL2	Honda® GX160	4.8 HP, 7.6 torque (lbsft.)	Gas	5800803	03732	14"	220
CC565MBVXL2	Briggs & Stratton * Vanguard	6.5 HP	Gas	5801217	23961	14"	170

Horsepower and torque as rated by the engine manufacturer



Folding Stand



Folding Stand with Wheel Kit

CC500MXL	2 OPT	IONS
Description	Part #	Cat #
Folding Stand	2500839	46870
Folding Stand Upgrade*	6030042	46893
Folding Stand Wheel Kit	6030040	48547
Cord 50 ft. 12GA 115V 20A Twist to 15A Straight	4699100	47884
Cord 100 ft. 12GA 115 V 20A Twist to 15A Straight	4699101	48548

*Must be ordered with new saw to upgrade from the leg kit.





The blade shaft and bearings are enclosed in a dust free housing to ensure long bearing life. The blade shaft cover plate allows easy access for greasing the bearings. The flange block bearings make bearing replacement easy without the need for a hydraulic press or other special tools.

Removing the saw head is simple-just pull two locking pins and lift the head off of the frame. The cutting depth adjustment is on the side of the frame instead of the back.



Side carrying handles allow transport easier while keeping the saw balanced



The stay-level blade guard provides the operator with safety and convenience while sawing. Our pivot mechanism resists slurry build-up, which could affect pivoting performance.



- 24" blade cuts a 10" block in a single pass
- Variety of power options
- · Stay level blade guard and enclosed blade shaft
- Replaceable cart travel rails
- Durable 3/16" steel frame
- Includes water pump
- Easy rolling 16" x 25" aluminum cutting cart/tray with vulcanized rubber coated non-slip top
- · Large capacity, deep tapered water tray
- Foot pedal controlled operating head leaves the operators hands free to guide material
- Hand wheel for quick and easy blade cutting depth adjustment
- Enclosed cart wheels prevent damage
- Forklift opening for easy transport
- · 2 V-belts promote efficient delivery of power to the blade
- Open back design for rip cutting longer materials
- Counterbalanced stay level blade guard assures the head is parallel to the cutting cart at all times


SPECIFICATIONS

Max. Depth of Cut	8" with 20" blade, 10" with 24" blade
Max. Cutting Capcity	18" length
Arbor Diameter	1"
Blade Shaft Bearings	Flange block ball bearings
Blade Shaft Drive	2 premium grip-notch v-belts
Blade Raise/Lower	Counterbalanced, spring tensioned head pivots on two 1" flange block bearings
Blade Coolant	Dual spray tubes, pump fed (electric models), garden hose connection (gas models)
Air Filter	3-stage cyclone (gas models)
Fuel Capacitor	1 gallon (gas models)
High Temp Shut-Off	Included (electric models)
Starter	Recoil on gas models capacity on electric models
Dimensions	23" wide, 70" tall, 65" long

DM BLOCK SAW

#	CC800M BLOCK SAW						
Model #	Motor/Engine Make	Motor/Engine Power	Power Type	Part #	Cat #	Blade Capacity	Product Weight (lbs)
CC850ME1-20	Baldor®	5 HP-1PH, 230V	Electric	5800540	46820	20"	470
CC850ME3-20	Baldor®	5 HP-3PH, 230V	Electric	5800541A	96416	20"	460
CC850ME3-20	Baldor®	5 HP -3PH, 460V	Electric	5800541B	18533	20"	500
CC875ME1-20	Baldor®	7.5 HP-1PH, 230V	Electric	5800542	47664	20"	525
CC875ME3-20	Baldor®	7.5 HP-3PH, 230V	Electric	5800544A	96015	20"	510
CC875ME3-20	Baldor®	7.5 HP-3PH, 460V	Electric	5800544B	96336	20"	515
CC875ME1-24	Baldor®	7.5 HP-1PH, 230V	Electric	5800543	47630	24"	530
CC875ME3-24	Baldor®	7.5 HP-3PH, 230V	Electric	5800545A	97240	24"	505
CC875ME3-24	Baldor®	7.5 HP-3PH, 460V	Electric	5800545B	97000	24"	509
CC808MH-20	Honda® GX270	8 HP, 14.1 torque (lbsft.)	Gas	5800546	47024	20"	460
CC811MH-20	Honda® GX390	11 HP, 19.5 torque (lbsft.)	Gas	5800547	47047	20"	485
CC811MH-24	Honda® GX390	11 HP, 19.5 torque (lbsft.)	Gas	5800548	47046	24"	485
CC811MHE-20*	Honda® GX390	11 HP, 19.5 torque (lbsft.)	Gas	5800566	60933	20"	515
CC811MHE-24*	Honda® GX390	11 HP, 19.5 torque (lbsft.)	Gas	5800567	81160	24"	525

Horsepower as rated by the engine manufacturer. *Electric start

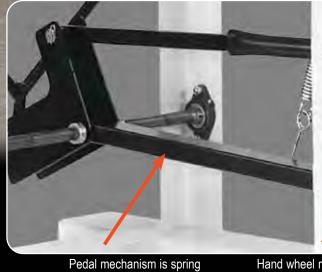

loaded, giving you more

control of your cut

Hand wheel makes it easy to adjust your cutting depth



Foot pedal leaves the operator's hands free which helps safety issues when cutting



We offer 20" and 24" masonry blades to maximize your productivity when using the CC800M or any of the other masonry saw models.



CC1000 SMALL JOINT CUTTING SAW

The Ultra Lightweight Saw That Cuts Decorative and Joint Cutting in Concrete







8" Blade Capacity Gasoline

Electric

FEATURES

- Power transference to blade drive via 2 molded notch 3VX premium belts for better cutting performance and long belt life
- Easy to maneuver push drive
- · Cyclone air cleaner for increased engine longevity
- <u>Center cut design</u> making it easier to keep the cut straight
- **Up-cut design** for a cleaner cut
- Adjustable blade alignment
- 1/8" steel frame
- 1" or 5/8" arbor with grease bearings

CC1000 S	PECIFICATIONS
Max. Depth of Cut	2.250" with 8" diameter blade
Blade Shaft RPM	6100
Blade Shaft Diameter	1"
Arbor Size	1" or .625" option
Front Wheels Size	3" x 2" x .750"
Rear Wheels Size	5" x 2" x .750"
Dimensions	14.5" wide, 34.5" tall, 23.5" long

Note: Electric saws do not ship with electric cord or pigtails.

3-Phase powered saws do not include male electric connector for control box

	CC1000 SMALL JOINT CUTTING SAW						
Model #	Engine//Motor Make	Engine/Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs)
CC1025E-8	Baldor*	2.5 HP, 110V/230V -1PH	Electric	5800552	47104	8"	75
CC1025E-8	Baldor®-5/8" shaft	2.5 HP, 110V/230V -1PH	Electric	5800716	63217	8"	75
CC1048H-8	Honda® GX160	4.8 HP, 7.6 Torque (lbsft.)	Gas	5800551	46851	8"	110
CC1048H-8	Honda® GX160-5/8" shaft	4.8 HP, 7.6 Torque (lbsft.)	Gas	5800620	82084	8"	120

Horsepower and torque as rated by the engine manufacturer

CC1100XL Joint Saw

CC1100XL JOINT CUTTING MINI SAW





14" Blade Capacity
Gasoline

FEATURES

- Heavy duty adjustable operator handles
- Easy to maneuver push drive
- Up-cut or down-cut available
- 1" arbor size with drive pin
- · Compact size for easy transporting

CC1100XL SPECIFICATIONS

Max. Depth of Cut	4.625" with 14" diameter blade
Blade Shaft RPM	2650
Blade Shaft Diameter	1"
Arbor Size	1"
Front Wheels Size	3" x 2" x .750"
Rear Wheels Size	8" x 2" x .750"
Dimensions	19.5" wide, 40.750" tall, 36" long

	CC1100XL JOINT CLEANING MINI GAS SAW					
Model #	Engine Make	Engine Power	Part #	Cat #	Blade Capacity	Product Weight (lbs)
CC1111HXL-14	Honda® GX390-Downcut	11.7 HP, 19.5 Torque (lbsft.)	5801015	04648	14"	185
CC1111HUXL-14	Honda® GX390-Upcut	11.7 HP, 19.5 Torque (lbsft.)	5801020	08366	14"	215

Horsepower and torque as rated by the engine manufacturer.



20" Blade Capacity

Gasoline

FEATURES

- · Heavy duty design, but light weight enough for two people to lift
- · Cyclone air filter
- · Easy to read built-in depth indicator
- · Precision dial screw feed raise and lower handle
- Poly V-Belts
- Water tank* and lifting bale included
- ** For dust suppression when dry cutting.

CCE0900 SPECIFICATIONS

Max. Depth of Cut	7-5/8"
Blade Shaft RPM	2600
Blade Shaft Diameter	1"
Arbor Size	1" with single drive pin
Blade Raise/Lower	Precision screw feed
Sawing Side	Right side only

CCE0900 PORTABLE SAW							
Model #	Engine Make	Engine Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs)
CCE0911H-20	Honda GX390	11.7 HP	Gas	5801613	30396	20"	290

Horsepower and torque as rated by the engine manufacturer.



14"-18" Blade Capacity Gasoline

FEATURES

- Heavy duty design, but light weight enough for two people to lift
- · Cyclone air filter
- Easy to read built-in depth indicator
- · Dial screw feed raise and lower handle
- · Adjustable heavy duty handles do not rattle like competitor handles
- · Left or right hand sawing
- Poly V-Belts
- · Water tank and lifting bale included

CC1200XL SPECIFICATIONS

4-5/8"	
6-5/8"	
2600	
1-1/4"	
1" with single drive pin	
Right or left	
Precision screw feed	
Standard	

CC1200XL SMALL WALK BEHIND SAW								
Saw Model #	Engine/Motor Make	Engine/Motor Model	Engine/Motor Power	Power Source	Blade Capacity	Part #	Cat #	Product Weight (lbs)
CC1208HXL-14	Honda®	GX270	8.5 HP, 14.1 Torque (lbsft.)	Gas	14"	5801092	32360	245
CC1211HXL-14	Honda®	GX390	11.7 HP, 19.5 Torque (lbsft.)	Gas	14"	5801093	32363	271
CC1208HXL-18	Honda®	GX270	8.5 HP, 14.1 Torque (lbsft.)	Gas	18"	5801095	32424	256
CC1211HXL-18	Honda®	GX390	11.7 HP, 19.5 Torque (lbsft.)	Gas	18"	5801097	32453	294

Horsepower and Torque as rated by the engine manufacturer.

CC1200XL OPTIONS

Description	Part #	Cat #
Lift frame kit for older (pre-2011 models)-Standard on all new saws	6047309	39744
Extra slip-on blade guard 14"	6016001	92016
Extra slip-on blade guard 18"	6016000	92017



CC1300XL SMALL WALK BEHIND SAW



14"-20" Blade Capacity Gasoline Electric

Hydraulic

FEATURES

- · Heavy duty frame design
- Cyclone air filter (Honda® models)
- · Easy to maneuver push drive
- Four position heavy duty handles offer no slack and don't rattle like other adjustable handles
- Solid sealed and self aligning blade shaft bearings
- · Left or right side sawing
- · Optional water tank available

CC1300XL SPECIFICATIONS

Max. Depth of Cut with 14" Blade	4-5/8"
Max. Depth of Cut with 18" Blade	6-5/8"
Max. Depth of Cut with 20" Blade	7-5/8"
Blade Shaft RPM	2600
Blade Shaft Diameter	1-1/4"
Arbor Size	1" with single drive pin
Blade Mounting	Right or left
Blade Raise/Lower	Precision screw feed

Note: Electric saws do not ship with electric cord or pigtails. 3-Phase powered saws do not include male electric connector for control box

CC1300XL SMALL WALK BEHIND SAW



CC1300XL SMALL WALK BEHIND SAW								
Saw Model #	Engine/Motor Make	Engine/Motor Model	Engine/Motor Power	Power Source	Blade Capacity	Part #	Cat #	Product Weight (lbs)
CC1308HXL-14	Honda®	GX270	8.5 HP, 14.1 Torque (lbsft.)	Gas	14"	5800575	75066	225
CC1311HXL-14	Honda®	GX390	11.7 HP, 19.5 Torque (lbsft.)	Gas	14"	5800576	75067	260
CC1305E1XL-14	Baldor®	n/a	5 HP, 230V-1PH	Electric	14"	5800577	75068	261
CC1305E3XL-14	Baldor®	n/a	5 HP, 230V-3PH	Electric	14"	5800578A	99977	275
CC1305E3XL-14	Baldor®	n/a	5 HP, 480V-3PH	Electric	14"	5800578B	26493	275
CC1311HUXL-14	Honda®	GX390 upcut	11.7 HP, 19.5 Torque (lbsft.)	Gas	14"	5800871	27131	350
CC1308HXL-18	Honda®	GX270	8.5 HP, 14.1 Torque (lbsft.)	Gas	18"	5800579	75070	225
CC1311HXL-18	Honda®	GX390	11.7 HP, 19.5 Torque (lbsft.)	Gas	18"	5800571	69995	260
CC1305E1XL-18	Baldor®	n/a	5 HP, 230V-1PH	Electric	18"	5800580	75071	280
CC1305E3XL-18	Baldor®	n/a	5 HP, 230V-3PH	Electric	18"	5800581A	93652	245
CC1305E3XL-18	Baldor®	n/a	5 HP, 480V-3PH	Electric	18"	5800581B	97080	245
CC1311HUXL-18	Honda®	GX390 upcut	11.7 HP, 19.5 Torque (lbsft.)	Gas	18"	5800872	26751	350
CC1310E3XL-20	Baldor*	n/a	10 HP, 230V-3PH	Electric	20"	5800589A	93810	315
CC1310E3XL-20	Baldor®	n/a	10 HP, 460V-3PH	Electric	20"	5800589B	93220	340
CC1310E3XL-20	Baldor*	n/a	10 HP, 230V/460V-3PH	Electric	20"	5800985	57763	335
CC1311HXL-20	Honda®	GX390	11.7 HP, 19.5 Torque (lbsft.)	Gas	20"	5800723	21855	365
CC1313HYXL-20	Danfoss*	n/a	15 GPM	Hydraulic	20"	5800724A	37387	230
CC1313HYXL-20	Danfoss®	n/a	20 GPM	Hydraulic	20"	5800724B	50852	230
CC1313HYXL-20	Danfoss*	n/a	25 GPM	Hydraulic	20"	5800724C	37388	230

Horsepower and Torque as rated by the engine manufacturer.

CC1300XL OPTIONS

Description	Part #	Cat #
Water Tank Kit with 5/8" hose (5 gal.)** - Includes water tank bracket	6049050	36252
Extended Blade Shaft Kit (up to 1" spacing)	6048107	48388
Catalytic Muffler for 11HP Honda®	2501567	78637
Extra Slip-on Blade Guard 14"	6048912	97088
Extra Slip-on Blade Guard 18"	6048910	97883
Extra Slip-on Blade Guard 20"	6048904	98682

Heavy duty adjustable handles and precision screw feed raise and lower



Powered By:

BALDOR

20" Blade Capacity Electric

FEATURES

- Electric powered for areas with limited access and where exhaust fumes are not allowed
- Easy to maneuver push drive
- Motor can be removed in limited access areas to allow for a single person operation
- · Screw feed raise and lower
- Full adjustable heavy duty handle design
- Lightweight Aluminum Frame and Lightest Weight Motor



Outok Motor Removal Allows Easy One Person Transportation



CC1500E SPECIFICATIONS

Max. Depth of Cut with 14" Blade	4-5/8"
Max. Depth of Cut with 18" Blade	6-1/2"
Max. Depth of Cut with 20" Blade	7-1/2"
Blade Shaft RPM	2000

Blade Shaft Diameter	1-1/4"
Arbor Size	1" with single drive pin
Blade Mounting	Right or left
Blade Raise/Lower	Precision screw feed

CC1500E MODULAR SAW

Saw Model #	Motor Make	Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs.)
CC1507E3-20	Baldor®	7.5 HP 460V, 3 PH	Electric	5801500	19131	20"	185

CC1500E OPTIONS

Description	Part #	Cat #
14" slip-on blade guard	6048912	97088
18" slip-on blade guard	6048910	97883
20" slip-on blade guard	6048904	98682

 $\label{prop:eq:horsepower} \mbox{ Horsepower and Torque as rated by the engine manufacturer.}$

Shown with electrical plug (not included). Comes with pigtail wires and plug must be installed.

CC1823BVXLP PROPANE SAW

Powered By:



Runs Clean and Efficiently

14"-20" Blade Capacity

Propane









CC1800XL control panel with screw feed, ignition switch, adjustable handles and hour meter.

Handles have two sets of grips that can be positioned outward or inward (as shown).

FEATURES

- Briggs Vanguard engine converted to propane vapor draw
- Horizontally-mounted 20 lbs. propane tank
- · Self-propelled travel for easy cutting
- Easy access to battery with heavy duty isolator switch to prevent battery drain
- · Screw feed raise and lower
- · Lifting hook standard on all models
- · Self aligning blade shaft bearings
- Electric start

Includes: electric start, low oil alert and hour meter

CC1800XL SI	PECIFICATIONS
Max. Depth of Cut with 14" Blade	4-5/8"
Max. Depth of Cut with 20" Blade	7-5/8"
Blade Shaft RPM	2600
Blade Shaft Diameter	1-1/4"
Arbor Size	1" with single drive pin
Blade Shaft Drive	4 belts
Blade Mounting	Right or Left
Transmission	Eaton Model 7
Drive Speed	0-80 feet per minute
Fuel tank size	20lbs, 37lbs. when full
Wheel Dimensions	5" x 1-1/2" x 3/4" (Front)
Wheel Dimensions	6" x -1-1/2" x 5/8" (Back)
Includes	Electric start, Low Oil Alert, Hour meter

CC1823BVXLP PROPANE WALK BEHIND SAW						
Model #	Engine Make/Model	Engine Power	Blade Capacity	Part #	Cat #	Product Weight (lbs.)
CC1823BVXLP-14S	Converted Briggs® Vanguard	23 HP	14"	5801426	101227	480
CC1823BVXLP-20S	Converted Briggs® Vanguard	23 HP	20"	5801427	101228	485

Blade not

CC1800XL OPTIONS

Description	Part #	Cat #			
Catalytic Muffler for 23HP Briggs Vanguard Engine	2505325	102396			
14" Slip-on Blade Guard	6048912	97088			
20" Slip-On Blade Guard	6048904	98682			
33 Lbs. propane tank with gauge	2705535	06804			

See other options for the CC1800XL on page 111





EPA CERTIFIED to run propane





14"-24" Blade Capacity

Gasoline

Electric Hydraulic

FEATURES

- Electric start option on Honda and Briggs Vanguard models
- Pull start backup on Briggs Vanguard models
- Push or self propelled models
- Easy access to battery with heavy duty isolator switch to prevent battery drain
- · Screw feed raise and lower
- Lifting hook standard on all models
- · Self aligning blade shaft bearings

Includes: Electric start (18-23HP), Low Oil Alert, Tach/hour meter (18-23 HP)

Note: Electric saws do not ship with electric cord or pigtails. 3-Phase powered saws do not include male electric connector for control box

CC1800XL SPECIFICATIONS

	CIFICATIONS		
Max. Depth of Cut with 14" Blade	4-5/8"		
Max. Depth of Cut with 18" Blade	6-5/8"		
Max. Depth of Cut with 20" Blade	7-5/8"		
Max. Depth of Cut with 24" Blade	9-5/8"		
Blade Shaft RPM	2600		
Blade Shaft Diameter	1-1/4"		
Arbor Size	1" with single drive pin		
Blade Cheff Duive	3 belts on 11.7HP,		
Blade Shaft Drive	4 belts on other models		
Blade Mounting	Right or Left		
Transmission	Eaton Model 7		
Drive Speed	0-80 feet per minute		
Fuel Capacity (gas models)	2 gallon		
Wilson Dimensions	5" x 1-1/2" x 3/4" (Front)		
Wheel Dimensions	6" x -1-1/2" x 5/8" (Back)		

GG1800XL MEDIUM SAW

CC1800XL MEDIUM WALK BEHIND SAW-PUSH MODELS								
Model #	Engine/Motor Make/Model	Engine/Motor Power	Power Source	Part # with 14" Guard	Cat # with 14" Guard	Part # with 20" Guard	Cat # with 20" Guard	Product Weight (lbs.)
CC1875E1XL-P	Baldor®	7.5 HP, 230V-1PH	Electric	5800628	54480	5800629	54490	395
CC1810E3XL-P	Baldor [®]	10 HP, 230V-3PH	Electric	5800692A	54485	5800693A	54497	420
CC1810E3XL-P	Baldor®	10 HP, 460V-3PH	Electric	5800692B	54565	5800693B	54580	425
CC1810E3XL-P	Baldor®	10 HP, 575V-3PH	Electric	5800692C	54568	5800693C	54581	430
CC1811HXL-P	Honda® GX390 Gas	11.7 HP, 19.5 Torque (lbsft.)	Gas	5800694	54486	5800695	54498	310
CC1811HEXL-P	Honda® GX390 Gas ▶	11.7 HP, 19.5 Torque (lbsft.)	Gas	5802258	27946	5802259	17244	280
CC1818HYXL-P	Danfoss®	15 gpm	Hydraulic	5800698A	54489	5800699A	54506	300
CC1818HYXL-P	Danfoss®	20 gpm	Hydraulic	5800698B	54571	5800699B	54582	300
CC1818HYXL-P	Danfoss®	25 gpm	Hydraulic	5800698C	54579	5800699C	54593	300
CC1800XL MEDIUM WALK BEHI			VD SA	W-SEL	.F-PRC	PELLE	D MO	DELS
CC1875E1XL-S	Baldor®	7.5 HP, 230V-1PH	Electric	5800736	54507	5800737	54539	450
CC1810E3XL-S	Baldor®	10 HP, 230V-3PH	Electric	5800738A	54508	5800739A	54540	460
CC1810E3XL-S	Baldor®	10 HP, 460V-3PH	Electric	5800738B	54596	5800739B	54600	380
CC1810E3XL-S	Baldor®	10 HP, 575V-3PH	Electric	5800738C	54597	5800739C	54601	380
CC1811HXL-S	Honda® GX390 Gas	11.7 HP, 19.5 Torque (lbsft.)	Gas	5800643	54536	5800644	54541	380
CC1811HEXL-S	Honda® GX390 Gas ►	11.7 HP, 19.5 Torque (lbsft.)	Gas	5802260	27947	5802261	78112	395
CC1818HYXL-S	Danfoss*	15 gpm	Hydraulic	5800647A	54538	5800648A	54549	350
CC1818HYXL-S	Danfoss*	20 gpm	Hydraulic	5800647B	54598	5800648B	54604	350
CC1818HYXL-S	Danfoss*	25 gpm	Hydraulic	5800647C	54599	5800648C	54623	350
CC1820HXL-S	Honda®GX630 ► ◆	20.8 HP, 35.6 Torque (lbsft)	Gas	5800667	51234	5800668	53351	470
CC1823BVXL-S	Briggs®Vanguard ▶◆□	23 HP	Gas	5801218	22269	5801219	22271	460
CC1820HXL-24S - MEDIUM WALK BEHIND SELF-PROPELLED						LED		
Model #	Engine/Motor Make/ Model	Engine/Motor Power	Power Source			Cat # with 24" Guard		Product Weight (lbs.)
CC1820HXL-24S	Honda®GX630 ▶◆	20.8 HP 25.6 Torque (lbs.ft.)	Gas	580°	1229	684	448	490

◆ Includes remote cyclone air cleaner □Gross horsepower at 3600 RPM per SAEJ1940 Horsepower and Torque as rated by the engine manufacturer.



CC1800XL control panel with screw feed, ignition switch, adjustable handles and hour meter. Handles have two sets of grips that can be positioned outward or inward (as shown).

CC1800XL OPTIONS					
Description	Part #	Cat #			
Electric Water Pump (electric start engines only)	6048970	66686			
Water Tank Kit* (7.5 gallon)*	6049020	70611			
Tach/Hour Meter-Digital(displays engine RPM) ◆	2801502	36079			
Weight Kit (26 lbs) **	6048959	66687			
Parking Brake	6048873	66688			
Catalytic Muffler for 11.7HP GX390 Honda® Engines	2501567	78637			
Catalytic Muffler for 20.8HP GX630 Honda® Engines	2703546	68832			
Extended Blade Shaft Kit for up to 1" spacing	6048107	48388			
14" Slip-on Blade Guard	6048912	97088			
20" Slip-On Blade Guard	6048904	98682			
Flange Lock Kit	6011702A	102737			

^{*} For dust suppression when dry cutting only-not available on electric saws.
◆ Standard on all 18HP and 23HP models.
** Standard on all electric saws with 20" blade capacity and saws over 15HP.



Hydraulic

FEATURES

- Rigid high strength 3/16" steel box frame with heavy bar reinforcement
- Two position tilt handle bars
- · Four power options offer versatility and convenience
- · Screw feed raise and lower with optional power raise and lower
- · Cyclone air filter on gas models
- Positive gear drive to rear axle via Eaton hydrostatic transmission

Includes: Electric start (20-25HP), Low Oil Alert, Tach/hour meter (20-25 HP), Frame lift, Cutting depth indicator, Quick disconnect blade flanges, Telescoping front pointer

CC2500 SPECIFICATION

Max. Depth of Cut with 14" Blade	4-5/8"		
Max. Depth of Cut with 20" Blade	7-3/8"		
Max. Depth of Cut with 26" Blade	10-3/8"		
Blade Shaft RPM	Varies		
Blade Shaft Diameter	1-1/2"		
Arbor Size	1" with single drive pin		
Blade Shaft Drive	4 belts on 20.8HP,		
Blade Shall Drive	5 belts on 25HP		
Blade Mounting	Right or Left		
Transmission	Eaton Model 7		
Drive Speed	0-130 feet per minute		
Fuel Capacity (gas models)	5 gallon		

MEDIUM WALK BEHIND SAW

CC2500 MEDIUM WALK BEHIND SAW

COLOGO MEDICINI WALK BEI III O CAW							
Model #	Engine/Motor Make/Model	Engine/Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs.)
CC2515E3-14	Baldor	15 HP, 230V-3PH	Electric	5800400A	48413	14"	700
CC2515E3-14	Baldor	15 HP, 460V-3PH	Electric	5800400B	99980	14"	700
CC2515E3-20	Baldor	15 HP, 230V-3PH	Electric	5800401A	98001	20"	670
CC2515E3-20	Baldor	15 HP, 460V-3PH	Electric	5800401B	93694	20"	660
CC2515E3-26	Baldor	15 HP, 230V-3PH	Electric	5800402A	94379	26"	705
CC2515E3-26	Baldor	15 HP, 460V-3PH	Electric	5800402B	94409	26"	720
CC2520H-14	Honda® GX630** ◆	20.8 HP, 35.6 Torque (lbsft.)	Gas	5800406	48418	14"	600
CC2520H-20	Honda® GX630** ◆	20.8 HP, 35.6 Torque (lbsft.)	Gas	5800407	47164	20"	669
CC2520H-26	Honda® GX630** ◆	20.8 HP, 35.6 Torque (lbsft.)	Gas	5800408	48419	26"	670
CC2522H-14	Honda® GX690** ◆	22.1 HP, 35.6 Torque (lbsft.)	Gas	5801520	29637	14"	610
CC2522H-20	Honda® GX690** ◆	22.1 HP, 35.6 Torque (lbsft.)	Gas	5801521	29638	20"	620
CC2522H-26	Honda® GX690** ◆	22.1 HP, 35.6 Torque (lbsft.)	Gas	5801522	34013	26"	642
CC2525H-14	Honda® iGX800 (EFI) ** ◆	25 HP	Gas	5801451	108196	14"	610
CC2525H-20	Honda® iGX800 (EFI) ** ◆	25 HP	Gas	5801452	108197	20"	620
CC2525H-26	Honda® iGX800 (EFI) ** ◆	25 HP	Gas	5801453	108198	26"	642
CC2525HY-14	Webster® ◆	25 HP-25 GPM @ 2000 PSI	Hydraulic	5800489	48426	14"	610
CC2525HY-20	Webster® ◆	25 HP-25 GPM @ 2000 PSI	Hydraulic	5800490	48427	20"	625
CC2525HY-26	Webster® ◆	25 HP-25 GPM @ 2000 PSI	Hydraulic	5800491	48428	26"	650
CC2525KC-14	Kohler® Command CH742** ◆	25 HP, 41.2 Torque (lbsft.)	Gas	5800597	79036	14"	645
CC2525KC-20	Kohler® Command CH742** ◆	25 HP, 41.2 Torque (lbsft.)	Gas	5800598	79037	20"	650
CC2525KC-26	Kohler [®] Command CH742** + ◆	25 HP, 41.2 Torque (lbsft.)	Gas	5800599	78816	26"	665

50 cycle motors available on request. (motor starter switch box included).

Horsepower and torque as rated by the engine manufacturer.

CC2500 BLADE GUARDS						
Description	Part #	Cat #				
14" Tapered Mount Blade Guard	6010950	20011				
20" Tapered Mount Blade Guard	6010952	08213				
26" Tapered Mount Blade Guard	6010954	19322				

	A L
	(i 🗓 🎎 🏲
	(9) (
90%	
CE2500 Walk Behind Saw	
	TO A

CC2500 control panel shown with optional raise/lower control switch

CC2500 OPTIONS					
Description	Part #	Cat #			
Water Safety Switch ◆	6047932	47451			
Water Safety Switch (for saws with newer GX630/660/690 Honda engines)	6041358	58340			
Water Pump (electric) ◆	6047933	48432			
Spot Light ◆	6047934	48433			
Electric Raise/Lower Assembly for Gas Saw	6047967	48002			
Electric Raise/Lower Assembly for Electric Saw *	6047970	47467			
Electric Raise/Lower Assembly for Hydraulic Saw *	6047980	52974			
Hydraulic Raise/Lower Assembly for Gas Saw	6047997	78817			
Hydraulic Raise/Lower Assembly for Electric Saw *	6047998	79041			
Hydraulic Raise/Lower Assembly for Hydraulic Saw *	6047999	79042			
Catalytic Muffler for Honda GX630, GX660 & GX690	2504587	61953			
Blade stacking kit-5" flange (for blades 1-1/2" apart)	6010630B	25424			
Blade spacing kit-5" flange (for blades 2" apart)	6010631B	25426			
Blade spacing kit-5" flange(for blades 4" apart)	6010632B	23197			
Flange Lock Kit	6011702A	102737			

- Not available on electric saw models (CC2515E) or hydraulic saw models (CC2525HY) without Power Raise/Lower Assembly.
 * Includes battery and alternator.

Note: Electric saw do not ship with electric cord or pigtails.

3-Phase powered saws do not include male electric connector for control box

^{**} Includes remote cyclone air cleaner. + Right hand sawing only on this 26" model. • Electric start.



CC2525KCP PROPANE WALK BEHIND SAW

BENEFITS OF E.F.I.

- Efficient 25% fuel savings on average vs. carburetor
- No carburetor related problems
- Reduced issues with bad fuel
- Faster engine start
- EFI's dynamic feedback loop optimizes fuel economy and performance to various operating conditions.



KOHLER Engines



PHASE III







FEATURES

- · Kohler Command EFI engine
- · Rigid high strength steel box frame with heavy bar reinforcement
- · Two position tilt handle bars
- · Self propelled drive for easy cutting
- · Screw feed raise and lower with optional power raise and lower
- · Cyclone air filter
- Positive gear drive to rear axle via Eaton hydrostatic transmission
- Fits through a 30" door frame

Includes: Electric start, Low Oil Alert, Tach/hour meter, Frame lift, Cutting depth indicator, Quick disconnect blade flanges, Telescoping front pointer

CC3500 SPECII	FICATIONS
Max. Depth of Cut with 14" Blade	4-3/8"
Max. Depth of Cut with 20" Blade	7-3/8"
Max. Depth of Cut with 26" Blade	10-3/8"
Blade Shaft Diameter	Varies
Arbor Size	1" with single drive pin
Blade Shaft Drive	5 belts
Blade Mounting	Right or Left
Transmission	Eaton Model 7
Drive Speed	0-130 feet per minute
Fuel tank (LP with vapor draw)	20lbs., 37lbs. when full

Blade not included

CC2525KCP PROPANE WALK BEHIND SAW						
Model #	Engine Make/Model	Engine Power	Blade Capacity	Part #	Cat #	Product Weight (lbs.)
CC2525KCP-14	Converted Kohler Command EFI	25 HP	14"	5801441	101515	980
CC2525KCP-20	Converted Kohler Command EFI	25 HP	20"	5801442	101516	1,030
CC2525KCP-26	Converted Kohler Command EFI	25 HP	26"	5801443	101517	1,060

CC2525KCP OPTIONS

Description	Part #	Cat #
Hydraulic Power Lift	6047405	101518
Electric Power Lift	6047406	101519

CC3535JBVP PROPANE WALK BEHIND SAW



CC3500 Control Panel
Easy to understand charts with
blade speeds, depth gauge, blade
RPM, safety information and more.









to run propane



14"-30" Blade Capacity

Propane

FEATURES

- · Briggs Vanguard engine converted to propane vapor draw
- · Great mid-size saw for service, utility work and rental
- · Jack shaft allows full engine power
- · Easy to maneuver self propelled drive
- · Strongest frame on the market
- Fits through a 30" door frame

Includes: Hour meter, Frame lift, Cutting depth indicator, Quick, disconnect blade flanges and Telescoping front pointer

CC3535JBVP SPECIFICATIONS

Max. Depth of Cut with 14" Blade	4-3/8"	
Max. Depth of Cut with 20" Blade	7-3/8"	
Max. Depth of Cut with 26" Blade	10-3/8"	
Max. Depth of Cut with 30" Blade	12-3/8"	
Blade Shaft Diameter	1-3/4"	
Arbor Size	1" with single drive pin	
Blade Shaft Drive	6 belts	
Blade Mounting	Right or Left	
Blade Raise/Lower	Electro-hydraulic pump	
Transmission	Eaton Model 11	
Drive Speed	0-200 feet per minute	
Air Filter	4-stage	
Fuel tank	33.5lbs, 58lbs. when full	

CC3535JBVP PROPANE WALK BEHIND SAW

Model #	Engine Make/Model	Engine Power	Blade Capacity	Part #	Cat #	Product Weight (lbs.)	
CC3535JBVP-14	Converted Briggs® Vanguard	35 HP	14"	5801412	101231	980	
CC3535JBVP-20	Converted Briggs® Vanguard	35 HP	20"	5801413	101232	1,030	
CC3535JBVP-26	Converted Briggs® Vanguard	35 HP	26"	5801414	101233	1,060	
CC3535JBVP-30	Converted Briggs® Vanguard	35 HP	30"	5801415	101234	1,095	

Blade not included

See standard options for the CC3535 on page 111

IDEAL FOR MUNICIPALITIES

BENEFITS OF

- Efficient 25% fuel savings on average vs. carbureted
- No carburetor related problems
- · Reduced issues with bad fuel
- · Faster engine start
- EFI's dynamic feedback loop optimizes fuel economy and performance to various operating conditions

Powered By:











CC3500 Control Panel
Shown with Optional Shaft Tachometer.

14"-30" Blade Capacity

Gasoline Electric

FEATURES

- · Great mid-size saw for service, utility work and rental
- · Jack shaft allows full engine power
- Easy to maneuver self propelled drive
- · Engine adjustment mechanism for belt tightening and maintenance
- · Strongest frame on the market
- 30% more torque with new jack shaft design (on gas models)
- · Fits through a 30" door frame

Includes: Hour meter, Frame lift, Cutting depth indicator, Quick disconnect blade flanges, Telescoping front pointer

Note: Electric saw do not ship with electric cord or pigtails.

3-Phase powered saws do not include male electric connector for control box

CC3500 SPECIFICATIONS

Max. Depth of Cut with 14" Blade	4-3/8"	
Max. Depth of Cut with 20" Blade	7-3/8"	
Max. Depth of Cut with 26" Blade	10-3/8"	
Max. Depth of Cut with 30" Blade	12-3/8"	
Blade Shaft Diameter	1-3/4"	
Arbor Size	1" with single drive pin	
Blade Shaft Drive	6 belts	
Blade Mounting	Right or Left	
Blade Raise/Lower	Electro-hydraulic pump	
Transmission	Eaton Model 11	
Drive Speed	0-200 feet per minute	
Air Filter	4-stage	
Fuel Capacity (gas models)	6 gallon	

CC2500 JACKSHAFT SAW



CC3500 WALK BEHIND SAW							
Model #	Engine/Motor Make/Model	Engine/Motor Power	Power Source	Part #	Cat #	Blade Capacity	Product Weight (lbs.)
CC3535JBV-14	Briggs & Stratton® Vanguard □	35 HP	Gas	5801305	25324	14"	950
CC3535JBV-20	Briggs & Stratton® Vanguard □	35 HP	Gas	5801306	25330	20"	1,000
CC3535JBV-26	Briggs & Stratton® Vanguard □	35 HP	Gas	5801307	25331	26"	1,030
CC3535JBV-30	Briggs & Stratton® Vanguard □	35 HP	Gas	5801308	25337	30"	1,065
CC3538JK-14	Kohler® Command ECH980 EFI	38 HP	Gas	5801166	08003	14"	950
CC3538JK-20	Kohler® Command ECH980 EFI	38 HP	Gas	5801167	70826	20"	1,000
CC3538JK-26	Kohler® Command ECH980 EFI	38 HP	Gas	5801168	72179	26"	1,030
CC3538JK-30	Kohler® Command ECH980 EFI	38 HP	Gas	5801169	100503	30"	1,065
CC3520E3-14	Baldor®	20 HP, 230V-3PH	Electric	5800784A	50442	14"	1,005
CC3520E3-14	Baldor®	20 HP, 460V-3PH	Electric	5800784B	03729	14"	1,005
CC3520E3-14	Baldor®	20 HP, 575V-3PH	Electric	5800784C	03730	14"	1,005
CC3520E3-20	Baldor®	20 HP, 230V-3PH	Electric	5800785A	50443	20"	1,070
CC3520E3-20	Baldor®	20 HP, 460V-3PH	Electric	5800785B	57116	20"	1,060
CC3520E3-20	Baldor®	20 HP, 575V-3PH	Electric	5800785C	03733	20"	1,015
CC3520E3-26	Baldor®	20 HP, 230V-3PH	Electric	5800786A	50444	26"	1,025
CC3520E3-26	Baldor®	20 HP, 460V-3PH	Electric	5800786B	51919	26"	1,025
CC3520E3-26	Baldor®	20 HP, 575V-3PH	Electric	5800786C	03739	26"	1,025
CC3520E3-30	Baldor®	20 HP, 230V-3PH	Electric	5800787A	50446	30"	1,070
CC3520E3-30	Baldor®	20 HP, 460V-3PH	Electric	5800787B	68486	30"	1,035
CC3520E3-30	Baldor*	20 HP, 575V-3PH	Electric	5800787C	03743	30"	1,035

☐ Gross horsepower at 3600 RPM per SAEJ1940. Horsepower and Torque as rated by the engine manufacturer.

CC3500 BLADE GUARDS						
Description	Part #	Cat #				
14" Tapered Mount Blade Guard	6010950	20011				
20" Tapered Mount Blade Guard	6010952	08213				
26" Tapered Mount Blade Guard	6010954	19322				
30" Tapered Mount Blade Guard	6010956	20456				



DC Travel option to allow movement of the saw when the saw is unplugged.

CC 3500 OP	TIONS	
Description	Part #	Cat #
Water Safety Switch	6047932	47451
Water Pump (electric)	6011032	02506
Parking Brake	6011228	81191
Spot Light	6010112	02427
Shaft Tachometer - 35HP Briggs, 37HP Kohler	6011384A	102445
Shaft Tachometer - 38HP Kohler EFI	6011384B	102444
Spot Light Kit for Soft Start Electric Models	6012182	27477
Blade spacing kit-5" flange (for blades 1-1/2" apart)	6010630B	25424
Blade spacing kit-5" flange (for blades 2" apart)	6010631B	25426
Blade spacing kit-5" flange (for blades 4" apart)	6010632B	23197
Lowering Speed Metering Valve	6010227	02480
Catalytic Muffler for 35HP Briggs Vanguard	2505198	102397
Soft Start Controller Add On for 230/460 volt**	6011449A	14278
Soft Start Controller Add On for 575 volt**	6011449B	14279
DC Travel 230/460V for saws without soft start**	6011621	98161
DC Travel 230/460V for saw with soft start**	6011624	33629
Flange Lock Kit	6011702A	102737

^{**} For electric saws-factory installed only.

575V or 50 cycle motors available on request (motor starter switch box included).

Quick-release Blades/Flange, Slip-on Blade Guards and Double Concave Roller Bearing are standard on all CC3500 models.



CC3700E ELECTRIC SAW



CC3700E Starter Box
Large electric saws feature an electric
motor controller/starter and a 2"
emergency stop button within easy reach
of the operator.

Powered By:





14"-42" Blade Capacity Electric

FEATURES

- · Frame designed for higher torque from high horsepower engines
- · Forward position motor for more weight at the blade and less on the operator
- Self propelled with Eaton Model 11 transmission
- · Single or three speed models
- · Front pivot allows easy turning
- · Multi-function control handle

Includes: Electric start, Hour meter, Frame lift, Cutting depth indicator, Quick disconnect blade flanges, Telescoping front pointer

CC3700E OPTIONS					
Description	Part #	Cat #			
Water Safety Switch	6047932	47451			
Water Pump (electric)	6011032	02506			
Parking Brake	6011228	81191			
Spot Light	6010112	02427			
Shaft Tachometer	6012168	06788			
Spot Light Kit for Soft Start Electric Models	6012182	27477			
Blade spacing kit-5" flange (for blades 1.5" apart)	6010630A	23186			
Blade spacing kit-5" flange (for blades 2" apart)	6010631A	23187			
Blade spacing kit-5" flange (for blades 4" apart)	6010632A	16558			
Lowering Speed Metering Valve	6010227	02480			
Soft Start Controller Add On for 230/460 volt*	6012187A	14310			
Soft Start Controller Add On for 575 volt**	6012187B	14311			
DC Travel 230/460V for saws without soft start*	6011843A	111701			
DC Travel 230/460V for saws with soft start**	6011844A	110204			
DC Travel 230/460V for saws w/soft start & alternator kit	6011623	33640			
Flange Lock Kit	6011702A	102737			

^{*} For electric saws-factory installed.

Max. Depth of Cut with 14" Blade	4-1/2"
Max. Depth of Cut with 20" Blade	7-1/2"
Max. Depth of Cut with 26" Blade	10-1/2"
Max. Depth of Cut with 30" Blade	11-3/4"
Max. Depth of Cut with 36" Blade	14-3/4"
Max. Depth of Cut with 42" Blade	17-3/4"
Blade Shaft Diameter	1-3/4"

CC3700E SPECIFICATIONS

Blade not included

Blade Mounting Right or Left

Blade Raise/Lower Electro-hydraulic pump

Transmission Eaton Model 11

Drive Speed 0-200 feet per minute

Dimensions 32.250" wide, 49" tall, 59" long



Arbor Size

Blade Shaft Drive

DC Travel option to allow movement of the saw when the saw is unplugged.

1" with single drive pin

8 belts

CC3700E Saw

CC3700E ELECTRIC SAW



Γ	C	3700E ELE	CTRIC WA	ALK BEHI	ND SAW	- Baldor®	
	Model #	Motor Power	Speed	Part #	Cat #	Blade Capacity	Product Weight (lbs.)
	CC3725E3-14	25 HP, 230V-3PH	Single	5800445A	14306	14"	1,385
Г	CC3725E3-14	25 HP, 460V-3PH	Single	5800445B	03765	14"	1,385
Г	CC3725E3-14	25 HP, 575V-3PH	Single	5800445C	03781	14"	1,385
Г	CC3725E3-20	25 HP, 230V-3PH	Single	5800446A	07869	20"	1,395
	CC3725E3-20	25 HP, 460V-3PH	Single	5800446B	07870	20"	1,395
Г	CC3725E3-20	25 HP, 575V-3PH	Single	5800446C	07878	20"	1,395
Г	CC3725E3-26	25 HP, 230V-3PH	Single	5800447A	03782	26"	1,330
Г	CC3725E3-26	25 HP, 460V-3PH	Single	5800447B	97597	26"	1,405
Γ	CC3725E3-26	25 HP, 575V-3PH	Single	5800447C	03783	26"	1,405
Г	CC3725E3-30	25 HP, 230V-3PH	Single	5800448A	32087	30"	1,415
Г	CC3725E3-30	25 HP, 460V-3PH	Single	5800448B	03797	30"	1,415
Г	CC3725E3-30	25 HP, 575V-3PH	Single	5800448C	03805	30"	1,415
Г	CC3725E3-36	25 HP, 230V-3PH	Single	5800449A	07716	36"	1,425
Г	CC3725E3-36	25 HP, 460V-3PH	Single	5800449B	03811	36"	1,425
Г	CC3725E3-36	25 HP, 575V-3PH	Single	5800449C	03829	36"	1,425
Г	CC3730E3-14	30 HP, 460V - 3PH	Single	5800381A	14300	14"	1,435
Г	CC3730E3-20	30 HP, 460V - 3PH	Single	5800382A	97788	20"	1,325
Г	CC3730E3-26	30 HP, 460V - 3PH	Single	5800383A	99455	26"	1,455
	CC3730E3-30	30 HP, 460V - 3PH	Single	5800384A	15225	30"	1,345
Г	CC3730E3-36	30 HP, 460V - 3PH	Single	5800385A	60786	36"	1,425
	CC3730E3-3-14	30 HP, 460V - 3PH	3-Speed	5801080A	45113	14"	1,425
	CC3730E3-3-14	30 HP, 575V - 3PH	3-Speed	5801080B	45114	14"	1,535
Γ	CC3730E3-3-20	30 HP, 460V - 3PH	3-Speed	5801081A	45115	20"	1,535
	CC3730E3-3-20	30 HP, 575V - 3PH	3-Speed	5801081B	45117	20"	1,545
	CC3730E3-3-26	30 HP, 460V - 3PH	3-Speed	5801082A	44435	26"	1,545
Š	CC3730E3-3-26	30 HP, 575V - 3PH	3-Speed	5801082B	45118	26"	1,405
7	CC3730E3-3-30	30 HP, 460V - 3PH	3-Speed	5801083A	45119	30"	1,555
5	CC3730E3-3-30	30 HP, 575V - 3PH	3-Speed	5801083B	45123	30"	1,565
ì	CC3730E3-3-36	30 HP, 460V - 3PH	3-Speed	5801084A	45124	36"	1,565
	CC3730E3-3-36	30 HP, 575V - 3PH	3-Speed	5801084B	45125	36"	1,575
200	CC3730E3-3-42	30 HP, 460V - 3PH	3-Speed	5801085A	45126	42"	1,575
ě	CC3730E3-3-42	30 HP, 575V - 3PH	3-Speed	5801085B	45127	42"	1,575
(ARIA	CC3740E3-20	40 HP, 460V-3PH	Single	5800436A	50871	20"	1,435
20000	CC3740E3-26	40 HP, 460V-3PH	Single	5800437A	97350	26"	1,325
100	CC3740E3-30	40 HP, 460V-3PH	Single	5800438A	99107	30"	1,455
	CC3740E3-36	40 HP, 460V-3PH	Single	5800439A	10497	36"	1,345
	CC3740E3-3-14	40 HP, 460V-3PH	3-Speed	5801086A	45128	14"	1,425
L	CC3740E3-3-14	40 HP, 575V-3PH	3-Speed	5801086B	45129	14"	1,425
	CC3740E3-3-20	40 HP, 460V-3PH	3-Speed	5801087A	45130	20"	1,535
L	CC3740E3-3-20	40 HP, 575V-3PH	3-Speed	5801087B	45131	20"	1,535
L	CC3740E3-3-26	40 HP, 460V-3PH	3-Speed	5801088A	45134	26"	1,545
L	CC3740E3-3-26	40 HP, 575V-3PH	3-Speed	5801088B	45135	26"	1,545
L	CC3740E3-3-30	40 HP, 460V-3PH	3-Speed	5801089A	42266	30"	1,405
L	CC3740E3-3-30	40 HP, 575V-3PH	3-Speed	5801089B	45137	30"	1,555
L	CC3740E3-3-36	40 HP, 460V-3PH	3-Speed	5801090A	44357	36"	1,565
L	CC3740E3-3-36	40 HP, 575V-3PH	3-Speed	5801090B	45138	36"	1,565
L	CC3740E3-3-42	40 HP, 460V-3PH	3-Speed	5801091A	45141	42"	1,575
	CC3740E3-3-42	40 HP, 575V-3PH	3-Speed	5801091B	45143	42"	1,575

Description	Part #	Cat #
14" Tapered Mount Blade Guard	6010950	20011
20" Tapered Mount Blade Guard	6010952	08213
26" Tapered Mount Blade Guard	6010954	19322
30" Tapered Mount Blade Guard	6010956	20456
36" Tapered Mount Blade Guard	6010958	13375
42" Tapered Mount Blade Guard	6010960	08216

Blade Size	Blade RPM	Gear Setting High, Med, Low	Max Cut Depth
14"	2,925	Н	3-3/4"
20"	2,520	Н	6-3/4"
26"	1,950	M	9-3/4"
30"	1,680	M	11-3/4"
36"	1,300	Ĺ	14-3/4"
42"	1,120	L	17-3/4"



CC4545DCV REAR PIVOT SAW



- Certified Stage 5 for clean reliable power with Caterpillar's latest engine technology
- Adjustable blade lowering speed that is dash mounted for quick, precise adjustment
- Single hand sawing control with forward/reverse/raise/lower all in one ergonomic grip
- Pull/twist-lock for differential locking
- · Three-speed gearbox is standard
- Four position handle bars set and lock at comfortable, preferred angles
- Large 6 gallon fuel tank with convenient left side door along with electronic low fuel level indication
- · Quick access rear cover screen for inspecting and service with simple latch convenience
- Heavy duty 12" rear thick rubber tread wheels and 8" durable tread on front
- Automatic parking brake with hydraulic activation in stop position gate
- · Advanced low-profile air cleaner with radial seal primary and secondary filters with maintenance indicator
- Sealed electronic protection resists heat, moisture, shock and vibration

Includes: Telescoping front and rear pointers, fuel cooler, oil drain valve, air restriction indicator, travel speed push/pull cable, positive front axle depth stop, slip-on blade flange guard, polycarbonate decals, blade shaft wrench

CC4548DCV REAR PIVOT SAW



CC4948DCV REAR PIVOT 3-SPEED WALK BEHIND DIESEL SAW - 48HP CAT®

DIESEL SAW - 46HP CAT						
Model #	Part #	Cat #	Blade Capacity	Product Weight (lbs.)		
CC4948DCV-3-14	5801390	107976	14"	1,666		
CC4948DCV-3-20	5801391	107782	20"	1,673		
CC4948DCV-3-26	5801392	107977	26"	1,686		
CC4948DCV-3-30	5801393	107978	30"	1,696		
CC4948DCV-3-36	5801394	107979	36"	1,706		

CC4948DCV BLADE GUARDS						
Description	Part #	Cat #				
14" Straight Mounted Blade Guard	6045419	36389				
20" Straight Mounted Blade Guard	6045420	36388				
26" Straight Mounted Blade Guard	6045421	36387				
30" Straight Mounted Blade Guard	6056670	21487				
36" Straight Mounted Blade Guard	6056671	25835				

CC4948DCV OPTIONS						
Description	Part #	Cat #				
Water Pump (electric, self-priming)	6001092	113554				
LED Light Bar Assembly	6001060	103395				
LED Spot Light Assembly	6001050	103394				
ASO Valve Assembly	6056037	04283				



Advanced Digital 4" Display

Enhanced, rich color graphics for superior visibility in sunlight. Three view modes to choose from: blade speed, engine speed and engine torque. Engine service alerts offer maintenance reminders for optimum engine function.



CC4948DCV SPECIFICATIONS

Max. Depth with 14" Blade Max. Depth with 20" Blade Max. Depth with 26" Blade Max. Depth with 30" Blade Max. Depth with 36" Blade Engine Brand/Model

Engine Specification

Max Engine Power
Peak Engine Torque
Blade Arbor Size
Blade Flange Type

Blade Shaft

Blade Shaft Drive

Blade Raise & Lower

Blade Depth Control

Drive Speed

Rear Wheel Transmission

Parking Brake

Saftey Alerts

Front Wheel Dimensions

Rear Wheel Dimensions

4" with 4.5" OD flange at 2800 RPM
7" with 4.5" OD flange at 2600 RPM
10" with 5" OD flange at 2000 RPM
12" with 5" OD flange at 1700 RPM
15" with 6" OD flange at 1400 RPM
CAT C1.7 (DIT)

1,7 liter, 3 cylinder liquid-cooled, turbo diesel

48.3 HP @ 2800 RPM (CAT rating) 122.8 ft.-lbs. (165 Nm) @ 1800 RPM

1" diameter with drive pin

Quick disconnect

1-3/4" OD with left/right side blade mounting

8 V-Belts (3VX)

Electro-hydraulic power unit push button control

Electronic depth indicator and depth stop

0-300 FPM (3.5 mph) forward/reverse

Hydraulic motor mounted to locking differential

Automatic hydraulic lock at stop position

Emergency stop, blade over-speed, neutral start

8" x 3" with 1/2" poly tread (sealed ball bearings)

12" x 3" with 1" rubber tread (quick disconnect bushing)



CC5048DCV FRONT PIVOT SAW



- Certified EPA/CARB C1.7 Stage 5 Engine for clean reliable power with Caterpillar's latest engine technology
- Adjustable blade lowering speed that is dash mounted for quick, precise adjustment
- Single hand sawing control with forward/reverse/raise/lower all in one ergonomic grip
- · Three position handle bars set and lock at comfortable, preferred angles
- · Large 6 gallon fuel tank with convenient left side filler door along with electronic low fuel level indication
- Heavy duty wheels with durable polyurethane tread on front and thick rubber tread on the rear
- Automatic parking brake with hydraulic activation in stop position gate
- Robust blade shaft offers reliable support
- · Advanced air cleaner with radial seal primary and secondary filters with maintenance indicator
- Sealed electronic protection resists heat, moisture, shock and vibration

Includes: Telescoping front and rear pointers, fuel cooler, oil drain valve, air restriction indicator, travel speed push/pull cable, positive front axle depth stop, slip-on blade flange guard



CC5048DCV FRONT PIVOT SAW

CC50	40D	~\/ \//		1-111	
	SAW	والمستحدث			liter)
Model #	Speed	Part # (1.7 liter)	Cat # (1.7 liter)	Blade Capacity	Product Weight (lbs.)
CC5048DCV-14	Single	5801570	107939	14"	1,603
CC5048DCV-20	Single	5801571	107940	20"	1,613
CC5048DCV-26	Single	5801572	107941	26"	1,635
CC5048DCV-30	Single	5801573	107942	30"	1,643
CC5048DCV-36	Single	5801574	107943	36"	1,664
CC5048DC-42	Single	5801575	107944	42"	1,685
CC5048DCV-3-14	Three	5801576	107945	14"	1,603
CC5048DCV-3-20	Three	5801577	107946	20"	1,613
CC5048DCV-3-26	Three	5801578	107947	26"	1,635
CC5048DCV-3-30	Three	5801579	107948	30"	1,643
CC5048DCV-3-36	Three	5801580	107949	36"	1,664
CC5048DCV-3-42	Three	5801581	107950	42"	1,685

CC50)48C	OC WA	ALK B	EHIN	
DIESEL	SAV	/ 48HI	CAT	® (2.2	liter)
Model #	Speed	Part # (2.2 liter)	Cat # (2.2 liter)	Blade Capacity	Product Weight (lbs.)
CC5048DC-14	Single	5801420	102360	14"	1,703
CC5048DC-20	Single	5801421	102361	20"	1,713
CC5048DC-26	Single	5801422	101014	26"	1,735
CC5048DC-30	Single	5801423	102363	30"	1,743
CC5048DC-36	Single	5801424	102364	36"	1,764
CC5048DC-42	Single	5801425	102365	42"	1,785
CC5048DC-3-14	Three	5801430	105045	14"	1,703
CC5048DC-3-20	Three	5801431	105046	20"	1,713
CC5048DC-3-26	Three	5801432	104363	26"	1,735
CC5048DC-3-30	Three	5801433	105048	30"	1,743
CC5048DC-3-36	Three	5801434	104049	36"	1,764
CC5048DC-3-42	Three	5801435	105050	42"	1,785

CC5048DCV BL	ADE GU	ARDS
Description	Part #	Cat #
14" Tapered Mount, Slip-On Blade Guard	6010950	20011
20" Tapered Mount, Slip-On Blade Guard	6010952	08213
26" Tapered Mount, Slip-On Blade Guard	6010954	19322
30" Tapered Mount, Slip-On Blade Guard	6010956	20456
36" Tapered Mount, Slip-On Blade Guard	6010958	13375
42" Tapered Mount, Slip-On Blade Guard	6010960	08216
CC5048DCV BL	ADE OPT	IONS
Description	Part #	Cat #
Blade Stacking Kit (up to 1-1/2" width)	6010630A	23186
Blade Spacing Kit (up to 2" width)	6010631A	23187
Blade Spacing Kit (up to 4" width)	6010632A	16558

	CC5048DC\	OPTION	NS
	Description	Part #	Cat #
	Water Pump (electric, self-priming)	6001051	102375
۵	Oil Bath Blade Shaft Upgrade	6001072	102410
ř	Lighting Package (spot, bar, and dual marker lights)	6001070	102411
1	Auto Water System Kit	6001052	102376
	Water Pressure Switch Kit	6001053	102377
	Quick Set Power Handle Bar Upgrade	6001073	102412
	Slurry Shield Kit (side shield, undercarriage flap)	6001074	102413
	Weight Kit (56 lbs. rear weight)	6001058	102378
0.00	Folding Foot Rest	6001075	102414
	Air Pre-Cleaner Upgrade	6001078	102415

SPECIFICATIONS



Advanced Digital 4" Display

Enhanced, rich color graphics for superior visibility in sunlight. Three view modes to choose from: blade speed, engine speed and engine torque. Blade over speed alert that warns of blade RPM exceeding safe limit. Engine service alerts offer maintenance reminders for optimum engine function.

Max. Depth with 14" Blade	4.75" with 4.5" OD flange at 2800 RPM	
Max. Depth with 20" Blade	7.75" with 4.5" OD flange at 2600 RPM	
Max. Depth with 26" Blade	10.5" with 5" OD flange at 2000 RPM	
Max. Depth with 30" Blade	12.5" with 5" OD flange at 1700 RPM	
Max. Depth with 36" Blade	15" with 6" OD flange at 1400 RPM	
Max. Depth with 42" Blade	17.5" with 7" OD flange at 1200 RPM	
Engine Brand/Model	CAT C1.7 or C2.2 (DIT)	
Engine Specification	1,7 liter, 3 cylinder or 2.2 liter, 4 cylinder, liquid-cooled, turbo diesel	
Max Engine Power	48.3 HP (C1.7), 48.8 HP (C2.2) @ 2800 RPM (CAT rating)	
Peak Engine Torque	122.8 ftlbs. (165 Nm) @ 1800 RPM	
Blade Arbor Size	1" diameter with drive pin	
Blade Flange Type	Quick disconnect	
Blade Shaft	1-3/4" OD with left/right side blade mounting	
Blade Shaft Drive	8 V-Belts (3VX)	
Blade Raise & Lower	Electro-hydraulic power unit with push button control	
Blade Depth Control	Electronic depth indicator and depth stop	
Drive Speed	0-220 FPM (2.5 mph) forward/reverse	
Rear Wheel Transmission	Hydraulic pump driving dual wheel motors	
Parking Brake	Automatic hydraulic lock at stop position	
Saftey Alerts	Emergency stop, blade over-speed, neutral start	
Front Wheel Dimensions	8" x 3" with 1/2" poly tread (sealed ball bearings)	
Rear Wheel Dimensions	10" x 3" with 1" rubber tread (quick disconnect bushing)	

^{*} With blade guard and full fuel tank - no blade



FEATURES

- Liquid-cooled Kubota[®] gasoline, spark ignited industrial 61HP engine that is fully compliant with EPA regulations
- Self-propelled Eaton Model 11 transmission
- Fits through a 36" door frame
- Strongest frame on the market
- · Very low noise and vibration
- · Electronic fuel injection
- Modern engine controls
- Modern engine controls
- 3-way catalytic muffler that meets the latest EPA & CARB emission requirements

Includes: Blade shaft tachometer, hour meter, frame lift, telescoping front pointer, parking brake, cutting depth indicator, quick disconnect blade flanges, oil bath blade shaft

CC6561GK SP	ECIFICATIONS
Max. Depth of Cut with 14" Blade	4-1/2" (3-3/4" 3-speed)
Max. Depth of Cut with 20" Blade	7-1/2" (6-3/4" 3-speed)
Max. Depth of Cut with 26" Blade	10-1/2" (9-3/4" 3-speed)
Max. Depth of Cut with 30" Blade	11-3/4" (11-3/4" 3-speed)
Max. Depth of Cut with 36" Blade	14-3/4" (14-3/4" 3-speed)
Max. Depth of Cut with 42" Blade	17-3/4" (17-3/4" 3-speed)
Blade Shaft Diameter	2"
Arbor Size	1" with single drive pin
Blade Shaft Drive	10 belts
Blade Mounting	Right or Left
Blade Raise/Lower	Electro-hydraulic pump
Transmission	Eaton Model 11
Drive Speed	0-200 feet per minute
Air Filter	4-stage
Fuel Capacity	9 gallons

CC5561CK LARGE GAS SAW

12/25/36/36/38	2 0 1521104 (No. 12 O 14110 S)	100			
CC6561GK KU	BOTA GASOLINE	WALK B	EHIND SA	WS-61HP	Kubota®
Saw Model #	Speeds	Part #	Cat #	Product Weight (lbs.)	Blade Capacity
CC6561GK-14	Single	5801180	75242	1,814	14"
CC6561GK-20	Single	5801181	75241	1,829	20"
CC6561GK-26	Single	5801182	48097	1,847	26"
CC6561GK-30	Single	5801183	74109	1,848	30"
CC6561GK-36	Single	5801184	75243	1,864	36"
CC6561GK-42	Single	5801185	75245	1,884	42"
CC6561GK-3-14	3-Speed (14"/26"/36")	5801190	75246	1,941	14"
CC6561GK-3-20	3-Speed (20"/30"/42")	5801191	75249	1,949	20"
CC6561GK-3-26	3-Speed (14"/26"/36")	5801192	75251	1,967	26"
CC6561GK-3-30	3-Speed (20"/30"/42")	5801193	75252	1,968	30"
CC6561GK-3-36	3-Speed (14"/26"/36")	5801194	75254	1,984	36"
CC6561GK-3-42	3-Speed (20"/30"/42")	5801195	75255	2,004	42"

Horsepower and torque as rated by the engine manufacturer.

CC6561	GK SINGLE	SPEED RPM	
Blade Size	Blade RPM	Max Cut Depth	
14"	2700	4-1/2"	
20" 2400		7-1/2"	
26"	1950	10-1/2"	
30"	1700	11-3/4"	
36"	1400	14-3/4"	
42"	1200	17-3/4"	

CC6561GK 3-SPEED RPM				
Blade Size	Blade RPM	Gear Setting High, Med, Low	Max Cut Depth	
14"	2700	Н	3-3/4"	
20"	2550	Н	6-3/4"	
26"	1775	M	9-3/4"	
30"	1675	M	11-3/4"	
36"	1175	L	14-3/4"	
42"	1100	L	17-3/4"	

CC6561GK OPTIONS		
Description	Part #	Cat #
Water Safety Switch	6010522	67821
Water Pump (electric)	6011032	02506
Spot Light	6010112	02427
Lowering Speed Metering Valve	6010227	02480
Blade stacking kit-4-1/2" flange (for blades 1-1/2" apart)	6010630A	23186
Blade spacing kit-4-1/2" flange (for blades 2" apart)	6010631A	23187
Blade spacing kit-4-1/2" flange (for blades 4" apart)	6010632A	16558
14" Tapered Mount Blade Guard	6010950	20011
20" Tapered Mount Blade Guard	6010952	08213
26" Tapered Mount Blade Guard	6010954	19322
30" Tapered Mount Blade Guard	6010956	20456
36" Tapered Mount Blade Guard	6010958	13375
42" Tapered Mount Blade Guard	6010960	08216

CC6561GK Control Panel

Detailed control panel for easy operator use.
Electronic engine controls for clean running and lower operating costs.





FEATURES

- Tier 4 Final liquid-cooled engine allows for a smoother running, longer lasting saw with higher productivity
- · Easy to maneuver self propelled drive
- Strongest frame on the market
- Optimized weight distribution for easy maneuvering and reduced operator fatigue
- · Oil bath blade shaft comes standard
- · One-hand sawing control and parking brake
- Fits through a 36" wide door frame (when guard is removed)
- · Quick release blade flange

Includes: Blade shaft tachometer, hour meter, frame lift, telescoping front pointer, parking brake, cutting depth indicator, quick disconnect blade flanges, oil bath blade shaft

CC6571D SP	CC6571D SPECIFICATIONS			
Max. Depth of Cut with 14" Blade	4-1/2" (3-3/4" 3-speed)			
Max. Depth of Cut with 20" Blade	7-1/2" (6-3/4" 3-speed)			
Max. Depth of Cut with 26" Blade	10-1/2" (9-3/4" 3-speed)			
Max. Depth of Cut with 30" Blade	11-3/4" (11-3/4" 3-speed)			
Max. Depth of Cut with 36" Blade	14-3/4" (14-3/4" 3-speed)			
Max. Depth of Cut with 42" Blade	17-3/4" (17-3/4" 3-speed)			
Blade Shaft Diameter	2"			
Arbor Size	1" with single drive pin			
Blade Shaft Drive	10 belts			
Blade Mounting	Right or Left			
Blade Raise/Lower	Electro-hydraulic pump			
Transmission	Eaton Model 11			
Drive Speed	0-200 feet per minute			
Air Filter	4-stage			
Fuel Capacity	9 gallons			

CC5571D LICUID-CCCLED SAW

All BENEFITE GWI B	BY STATE OF STREET			_		
CC657	CC6571D DIESEL LIQUID COOLED SAW - 71 HP Kubota®					
Saw Model #	Speeds	Blade Capacity	Part #	Cat #	Product Weight (lbs.)	
CC6571D-14	Single	14"	5801160	55603	1,825	
CC6571D-20	Single	20"	5801161	55625	1,835	
CC6571D-26	Single	26"	5801162	43504	1,848	
CC6571D-30	Single	30"	5801163	54080	1,852	
CC6571D-36	Single	36"	5801164	41741	1,855	
CC6571D-42	Single	42"	5801165	55633	1,905	
CC6571D-3-14	3-Speed (14"/26"/36")	14"	5801170	59044	1,815	
CC6571D-3-20	3-Speed (20"/30"/42")	20"	5801171	55695	1,825	
CC6571D-3-26	3-Speed (14"/26"/36")	26"	5801172	43503	1,835	
CC6571D-3-30	3-Speed (20"/30"/42")	30"	5801173	55713	1,845	
CC6571D-3-36	3-Speed (14"/26"/36")	36"	5801174	55728	1,850	
CC6571D-3-42	3-Speed (20"/30"/42")	42"	5801175	55729	1,894	

Horsepower and torque as rated by the engine manufacturer.

CC6571D SINGLE SPEED RPM					
Blade Size	Blade RPM	Max Cut Depth			
14"	2,700	4-1/2"			
20"	2,400	7-1/2"			
26"	1,950	10-1/2"			
30"	1,700	11-3/4"			
36"	1,400	14-3/4"			
42"	1,200	17-3/4"			

CC	CC6571D 3-SPEED RPM				
Blade Size	Blade RPM	Gear Setting High, Med, Low	Max Cut Depth		
14"	2,700	Н	3-3/4"		
20"	2,550	Н	6-3/4"		
26"	1,775	M	9-3/4"		
30"	1,675	M	11-3/4"		
36"	1,175	L	14-3/4"		
42"	1,100	L	17-3/4"		

CC6571D OPTIONS & GUARDS				
Description	Part #	Cat #		
Water Safety Switch	6010522	67821		
Water Pump (electric)	6011032	02506		
Spot Light	6010112	02427		
Lowering Speed Metering Valve	6010227	02480		
Blade stacking kit-4-1/2" flange (for blades 1-1/2" apart) 20" Max.	6010630A	23186		
Blade spacing kit-4-1/2" flange (for blades 2" apart) 20" Max.	6010631A	23187		
Blade spacing kit-4-1/2" flange (for blades 4" apart) 20" Max.	6010632A	16558		
14" Tapered Mount Blade Guard	6010950	20011		
20" Tapered Mount Blade Guard	6010952	08213		
26" Tapered Mount Blade Guard	6010954	19322		
30" Tapered Mount Blade Guard	6010956	20456		
36" Tapered Mount Blade Guard	6010958	13375		
42" Tapered Mount Blade Guard	6010960	08216		

CC6571D Control Panel
Detailed control instructions and computer readout
for blade speed and engine setting.





CC5774DCV WALK BEHIND SAW



- Certified EU Stage V Engine Clean reliable power with Caterpillar's latest engine technology
- Advanced Digital 4" Display Enhanced rich color graphics for superior visibility in sunlight with blade, engine speed
 and engine torque views
- Critical Diagnostics Computer monitored functions alerts potential problems to avoid shutdown
- Engine Service Alerts Maintenance reminders for optimum engine function
- Digital Depth Indicator/Stop Accurate sawing depth/stop with easy pushbutton functionality
- Adjustable Blade Lowering Speed Dash mounted for precise adjustment
- Single Hand Sawing Control Forward/Reverse/Raise/Lower all in one ergonomic grip
- Effective Weight Balance Front to rear weight distribution for balanced optimum performance
- Front/Rear Tie Down Rings Safely secure for transport

FEATURES

- Quick Access Rear Cover Inspect and service with simple latch
- Automatic Parking Brake Hydraulic activation in stop position gate
- Simple Freewheeling Convenient dash mounted switch activation
- Quick Disconnect Flanges Quickly detach stuck blade to minimize down time
- Single Bolt Belt Tensioning Evenly adjust belt tension quickly
- Front Mounted Radiator Open front saw access for quick servicing
- Easy Access Belt Guard Hinged front access to quickly inspect drive belt condition/tension

CC6774DCV Saw

CC6774DCV WALK BEHIND SAW



CCe.	CC6774DCV DIESEL LIQUID COOLED SAW - 74 HP CAT®				
Saw Model #	Speeds	Blade Capacity	Part #	Catalog #	Product Weight (lbs.)
CC6774DCV-14	Single	14"	5801560	108005	1,865
CC6774DCV-20	Single	20"	5801561	108006	1,875
CC6774DCV-26	Single	26"	5801562	108007	1,895
CC6774DCV-30	Single	30"	5801563	108008	1,905
CC6774DCV-36	Single	36"	5801564	108009	1,925
CC6774DCV-42	Single	42"	5801565	108010	1,945

CC6774DCV BLADE GUARDS				
Description	Part #	Catalog #		
14" Tapered Mount, Slip-On Blade Guard	6010950	20011		
20" Tapered Mount, Slip-On Blade Guard	6010952	08213		
26" Tapered Mount, Slip-On Blade Guard	6010954	19322		
30" Tapered Mount, Slip-On Blade Guard	6010956	20456		
36" Tapered Mount, Slip-On Blade Guard	6010958	13375		
42" Tapered Mount, Slip-On Blade Guard	6010960	08216		

CC6774DCV BLADE OPTIONS				
Description	Part #	Catalog #		
Blade Stacking Kit (up to 1-1/2" width)	6010630A	23186		
Blade Spacing Kit (up to 2" width)	6010631A	23187		
Blade Spacing Kit (up to 4" width)	6010632A	16558		

CC6774DCV OPTIONS			
	Description	Part #	Catalog #
	Lighting Package	6001070	102411
	LED Spot Light	6001050	103394
	LED Light Bar	6001060	103395
	Water Pump, Electric	6001051	102375
ı	Auto Water System Kit	6001148	108035
L	Auto Pressure Switch Kit	6001053	102377
ŀ	Quick-Set Power Handle Bar Upgrade	6001151	108036
ı	Bogie Wheel	6001055	101866
	On-board Blade Storage (up to 36")	6016033	103397
-1/	Slurry Shield Kit	6001152	108935
2.74	Pointer Rope Recoil	6016032	103398
15.71	Max Capacity Battery Upgrade	6001076	103399
7 11	Weight Kit (56 extra lbs.)	6017428	61641
1000	Folding Foot Rest (Left or Right)	6001075	102414
ä	AND RESIDENCE OF THE RESIDENCE OF THE PARTY		

ENGINE	SPECIFICATIONS
Engine Brand/Model	CAT C2.2 (DITAAC)
Engine Regulation	EPA-CARB Tier 4 Final / EU Stage V
Engine Type	2.2 liter, 4 cylinder, liquid-cooled, turbo diesel
Max Engine Power	74 HP @ 2800 RPM (CAT rating)
Peak Engine Torque	199 ftlbs. (270 Nm) @ 1600 RPM
Aftertreatment Device	Diesel Oxidation Catalyst (DOC) + Diesel Particulate Filter (DPF)
Engine Air Filtration	Dry dual element with spinner pre-cleaner and restirction indicator
Battery	12 Volt (600 CCA) group size 24
Starter / Alternator	Electric 2.7hp (2kW) / 85 Amp
Fuel Type	Ultra low sulfur diesel (Cetane 45 min)
Fuel Tank	9 gallon (34 liter) with low fuel indicator
Engine Oil	SAE 15W-40 API class CI-4 (10qt/9.5L)
Radiator Coolant	50/50 Pre-mixed (2 gallon/7.6L)
Wheel Motor Pump Fluid	SAE 15W-40 (2 liter capacity)
Saw Lift Pump Fluid	SAE 15W-40 (1.5 liter capacity)
Lubrication Type	NLGI #2 Lithium grease

SAW SPE	CIFICATIONS
Max. Depth of Cut with 14" Blade	4.75" with 4.5" OD flange at 2800 RPM
Max. Depth of Cut with 20" Blade	7.75" with 4.5" OD flange at 2600 RPM
Max. Depth of Cut with 26" Blade	10.5" with 5" OD flange at 2000 RPM
Max. Depth of Cut with 30" Blade	12.5" with 5" OD flange at 1700 RPM
Max. Depth of Cut with 36" Blade	15" with 6" OD flange at 1400 RPM
Max. Depth of Cut with 42" Blade	17.5" with 7" OD flange at 1200 RPM
Blade Arbor Size	1" diameter with drive pin
Blade Flange Type	Quick disconnect
Blade Shaft	2" OD with left/right side blade mounting
Blade Shaft Drive	10 Kevlar V-Belts (3VX)
Blade Raise & Lower	Electro-hydraulic power unit with push button control
Blade Depth Control	Electronic depth indicator and depth stop
Drive Speed	0-220 FPM (2.5 mph) forward/reverse
Rear Wheel Transmission	Hydraulic pump driving dual wheel motors
Parking Brake	Automatic hydraulic lock at stop position
Handle Bar Adjustment	3 position with variable extension
Saftey Alerts	Emergency stop, blade over-speed, neutral start
Front Wheel Dimensions	8" x 3" with 1/2" poly tread (sealed ball bearings)
Rear Wheel Dimensions	10" x 3" with 1" rubber tread (quick disconnect bushing)





- Available with enhanced clutch assembly that allows the blade to be disengaged while the engine is running (single speed only)
- · Easy maneuvering self propelled drive
- · Strongest frame on the market
- · Hydraulic wheel motor drive
- · Right or left blade mounting
- Blade shaft gearbox-oil bath for low maintenance
- Maintenance-free DVERT® diesel oxidation catalytic converter (DOC-only, no DPF).
- · High pressure common rail electronic fuel injection.
- · Digital interface engine controls

CC7574DD-PRC	SPECIFICATIONS
Max. Depth of Cut with 20" Blade	7-1/4" (5" flange)
Max. Depth of Cut with 26" Blade	10-1/4" (5" flange)
Max. Depth of Cut with 30" Blade	12-1/4" (5" flange)
Max. Depth of Cut with 36" Blade	14-3/4" (6" flange)
Max. Depth of Cut with 42" Blade	17-1/4" (7" flange)
Max. Depth of Cut with 48" Blade	19-3/4" (8" flange)
Engine Specification	4-Cylinder, 3.3 Liter
Max. Engine Power	74.3HP at 2600 RPM
Emission Regulation	EPA Tier 4 Final Compliant
Blade Shaft Diameter	2"
Arbor Size	1" with single drive pin
Blade Shaft Drive	20 V-belts
Blade Raise/Lower	Electro-hydraulic pump
Transmission	Hydro pump powering dual wheel motors
Drive Speed	0-250 feet per minute
Air Filter	4-stage with restriction indicator
Fuel Capacity	9 gallons
Dimensions	31.750" wide, 58.5" tall, 65" long

CC7574DD-PRO INLINE SAW

==

CC7574	DD-PRO IN-L	INE DIESEL	WALK B	EHIND S	SAWS - 7	'4 HP
Model #	Engine Make	Speeds	Part #	Cat #	Product Weight (lbs.)	Blade Capacity
CC7574DD-PRO-20	Deutz [®] Turbo	Single	5801640	112298	2,210	20"
CC7574DD-PRO-26	Deutz® Turbo	Single	5801641	112299	2,228	26"
CC7574DD-PRO-30	Deutz® Turbo	Single	5801642	112300	2,229	30"
CC7574DD-PRO-36	Deutz [®] Turbo	Single	5801643	112301	2,245	36"
CC7574DD-PRO-42	Deutz® Turbo	Single	5801644	112302	2,265	42"
CC7574DD-PRO-48	Deutz [®] Turbo	Single	5801645	112303	2,274	48"
CC7574DD-PRO-3-30	Deutz [®] Turbo	3-Speed (20"/26"/30")	5801652	112310	2,384	30"
CC7574DD-PRO-3-36	Deutz® Turbo	3-Speed (20"/30"/36")	5801653	112311	2,400	36"
CC7574DD-PRO-3-42	Deutz [®] Turbo	3-Speed (26"/36"/42")	5801654	112312	2,420	42"
CC7574DD-PRO-3-48	Deutz [®] Turbo	3-Speed (30"/42"/48")	5801655	112313	2,429	48"
CC7574DDC-PRO-20	Deutz® Turbo w/Clutch	Single w/clutch	5801646	112304	2,230	20"
CC7574DDC-PRO-26	Deutz® Turbo w/Clutch	Single w/clutch	5801647	112305	2,248	26"
C7574DDC-PRO-30	Deutz® Turbo w/Clutch	Single w/clutch	5801648	112306	2,254	30"
C7574DDC-PRO-36	Deutz® Turbo w/Clutch	Single w/clutch	5801649	112307	2,265	36"
C7574DDC-PRO-42	Deutz® Turbo w/Clutch	Single w/clutch	5801650	112308	2,285	42"
C7574DDC-PRO-48	Deutz® Turbo w/Clutch	Single w/clutch	5801651	112309	2,294	48"

CC7574DD-PRO SINGLE SPEED RPM				
Blade Size	Blade RPM	Max Cut Depth		
20"	2,500	7-1/2"		
26"	2,100	10-1/2"		
30"	1,800	11-3/4"		
36"	1,500	14-3/4"		
42"	1,300	17-3/4"		
48"	1,050	19-3/4"		

	OPTIONS & BLADE GUARDS					
Description	Part #	Cat #				
Water Pump (electric)	6017183	21337				
Weight Kit (55 lbs.)*	6017428	61641				
20" Tapered Mount Blade Guard	6010952	08213				
26" Tapered Mount Blade Guard	6010954	19322				
30" Tapered Mount Blade Guard	6010956	20456				
36" Tapered Mount Blade Guard	6010958	13375				
42" Tapered Mount Blade Guard	6010960	08216				
48" Tapered Mount Blade Guard	6010962	24618				

^{*} Standard on CC7574DD-PRO-48

Blade Size	Blade RPM	Gear Setting High, Med, Low	Max Cut Depth
20"	2,500	Н	6-3/4"
26"	1,925	М	9-3/4"
30"	1,800	М	11-3/4"
36"	1,300	L	14-3/4"
42"	1,200	L	17-3/4"
48"	1,000	L	19-3/4"

CC7574DD-PRO 3-SPEED RPM



CC7574DD-PRO Control Panel

Detailed control instructions and computer readout for blade speed and engine setting.





- Stage 5 Kubota® diesel engine
- Self-propelled Eaton Model transmission
- Available with enhanced clutch assembly that allows the blade to be disengaged while the engine is running (single speed only)
- Strongest frame on the market
- · Hydraulic wheel motor drive
- · Right or left side blade mounting
- Blade shaft gearbox-oil bath for low maintenance
- · High pressure common rail electronic fuel injection.
- Modern digital interface engine controls

CC7574DKV SPECIFICATIONS			
Max. Depth of Cut with 20" Blade	7-1/4" (5" flange)		
Max. Depth of Cut with 26" Blade	10-1/4" (5" flange)		
Max. Depth of Cut with 30" Blade	12-1/4" (5" flange)		
Max. Depth of Cut with 36" Blade	14-3/4" (6" flange)		
Max. Depth of Cut with 42" Blade	17-1/4" (7" flange)		
Max. Depth of Cut with 48" Blade	19-3/4" (8" flange)		
Engine Brand	Kubota® Turbo Diesel Stage 5		
Engine Specification	4-Cylinder, 3.3 Liter		
Max. Engine Power	74.5HP at 2600 RPM		
Emission Regulation	EPA Tier Stage V Compliant		
Blade Shaft Diameter	2"		
Arbor Size	1" with single drive pin		
Blade Shaft Drive	20 V-belts,		
Blade Raise/Lower	Electro-hydraulic pump		
Transmission	Hydro pump powering dual wheel motors		
Drive Speed	0-250 feet per minute		
Air Filter	4-stage with restriction indicator		
Fuel Capacity	9 gallons		

CC7574DKV Saw

CC75740KV INLINE SAW

CC7574		(UBOTA DIESEL	. 74HP	WALK I	BEHIND	SAWS
Model #	Engine Make	Speeds	Part #	Cat #	Product Weight (lbs.)	Blade Capacity
CC7574DKV-20	Kubota® Turbo	Single	5801460	106338	2,210	20"
CC7574DKV-26	Kubota® Turbo	Single	5801461	106339	2,228	26"
CC7574DKV-30	Kubota® Turbo	Single	5801462	106340	2,229	30"
CC7574DKV-36	Kubota® Turbo	Single	5801463	106341	2,245	36"
CC7574DKV-42	Kubota® Turbo	Single	5801464	106342	2,265	42"
CC7574DKV-48	Kubota® Turbo	Single	5801465	106343	2,274	48"
CC7574DKVC-20	Kubota® Turbo w/Clutch	Single w/clutch	5801466	106344	2,240	20"
CC7574DKVC-26	Kubota® Turbo w/Clutch	Single w/clutch	5801467	106345	2,258	26"
CC7574DKVC-30	Kubota® Turbo w/Clutch	Single w/clutch	5801468	106346	2,259	30"
CC7574DKVC-36	Kubota® Turbo w/Clutch	Single w/clutch	5801469	106347	2,275	36"
CC7574DKVC-42	Kubota® Turbo w/Clutch	Single w/clutch	5801470	106348	2,295	42"
CC7574DKVC-48	Kubota®Turbo w/Clutch	Single w/clutch	5801471	106349	2,304	48"
CC7574DKV-3-30	Kubota® Turbo	3-Speed (20"/26"/30")	5801472	106350	2,384	30"
CC7574DKV-3-36	Kubota® Turbo	3-Speed (20"/30"/36")	5801473	106351	2,400	36"
CC7574DKV-3-42	Kubota® Turbo	3-Speed (26"/36"/42")	5801474	106352	2,420	42"
CC7574DKV-3-48	Kubota® Turbo	3-Speed (30"/42"/48")	5801475	106353	2,429	48"

Horsepower and torque as rated by the engine manufacturer.

CC7574DKV SINGLE SPEED RPM				
Blade Size	Blade RPM	Max Cut Depth		
20"	2,300	7-1/4"		
26"	1,875	10-1/4"		
30"	1,675	12-1/4"		
36"	1,375	14-3/4"		
42"	1,125	17-1/4"		
48"	1,000	19-3/4"		

CC7574DKV OPTIONS & BLADE GUARDS				
Description	Part #	Cat #		
Water Pump (electric)	6017547	75069		
Weight Kit (55 lbs.)*	6017428	61641		
20" Tapered Mount Blade Guard	6010952	08213		
26" Tapered Mount Blade Guard	6010954	19322		
30" Tapered Mount Blade Guard	6010956	20456		
36" Tapered Mount Blade Guard	6010958	13375		
42" Tapered Mount Blade Guard	6010960	08216		
48" Tapered Mount Blade Guard	6010962	24618		

^{*} Standard on CC7574DKV-48



CC7574DKV Control Panel

Detailed control instructions and computer readout for blade speed and engine setting.

CCSO74DCV deep out saw



FEATURES

- Stage 5 CAT® diesel engine
- Advanced digital 7" display with engine service alerts and maintenance reminders
- Front view camera to view sawing location/obstructions
- LED spot and bar lights for night sawing
- Auto Water System (AWS) automatically starts/stops water to blade when in/out of cut
- Undercarriage slurry flap to minimize slurry buildup on rear axle components
- Fast attach blade guard stabilizer with quick disconnect ball joints to speed guard removal
- Easy-turn bogie wheel that automatically lifts rear wheels at max raise height to allow rear saw swivel
- Enclosed rear wheel motors that are hydraulic driven with center swivel for easy tracking adjustment
- Powerful Jackshaft drive with low speed, high torque blade drive maximizing full engine power
- Advanced air cleaner with radial seal primary and secondary filters along with spinner style pre-cleaner
- Single piece frame platform with heavy bar and tubular reinforcement

CC9074DC	✓ SPECIFICATIONS
Max. Depth of Cut w/ 36" Blade	15" (6" flange)
Max. Depth of Cut w/ 42" Blade	17-1/2" (7" flange)
Max. Depth of Cut w/ 48" Blade	20" (8" flange)
Max. Depth of Cut w/ 54" Blade	22-1/2" (9" flange)
Max. Depth of Cut w/ 60" Blade	25" (10" flange)
Engine Brand/Model	CAT® Turbo Diesel
Engine Specification	4-Cylinder, 3.3 Liter
Max Engine Power	74.3 hp @ 2600 rpm (Kubota rating)
Peak Torque	195.5 Ft-Lbs (265 Nm) @ 1500 rpm
Blade Arbor Size	1" diameter with drive pin
Blade Flange Type	Quick disconnect
Blade Shaft	1-3/4" OD with left/right side mounting, 3 pillow blocks with spherical roller bearings
Blade Shaft Drive	Kevlar V-Belts Engine: 10 to Jackshaft: 20
Blade Raise & Lower	Electro-hydraulic power unit with push button control
Blade Depth Control	Electronic depth indicator and depth stop
Fifth Wheel	3-1/4" x 2" poly tread swivel lock caster
Drive Speed	0-220 FPM (2.5 mph) forward/reverse
Rear Wheel Drive	Hydraulic wheel motors with freewheel for pushing
Parking Brake	Automatic hydraulic lock at stop position
Handle Bar Adjustment	Variable extension with quick lock variable 30° angle range
Dimensions	33.250" wide,, 58.5" tall, 69" long. Base raise height maximum = 32"

CC9074DCV DEEP CUT SAW




	CC9074DCV DEEP CUT DIESEL SAW - SINGLE SPEED - 74 HP					
	Model #	Engine Make	Part #	Cat #	Product Weight (lbs.)	Blade Capacity
I	CC9074DCV-36	CAT® Turbo	5801490	112462	2,478	36"
ı	CC9074DCV-42	CAT® Turbo	5801491	112463	2,500	42"
I	CC9074DCV-48	CAT® Turbo	5801492	112464	2,533	48"
E	CC9074DCV-54	CAT® Turbo	5801493	112466	2,823	54"
	CC9074DCV-60	CAT® Turbo	5801494	112467	2,864	60"

CC9074DCV OPTIONS & BLADE GUARDS				
Description	Part #	Cat #		
Water Pump (electric)	6016035	49453		
36" Tapered Mount Blade Guard	6010958	13375		
42" Tapered Mount Blade Guard	6010960	08216		
48" Tapered Mount Blade Guard	6010962	24618		
54" Tapered Mount Blade Guard	6010614	99721		
60" Tapered Mount Blade Guard	6010616	70666		



Simplified Serviceability

Easy, open component access to speed routine maintenance

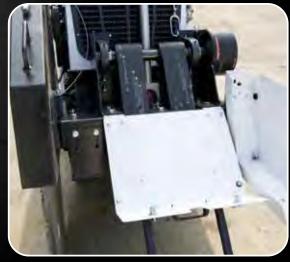

Easily Accessible Belts
Multi-panel openings for quick belt maintenance.



CC9074DCV Control Panel

Detailed control instructions and computer readout for blade speed and engine setting.

Can fold down to protect the screen.



CC7875DT4 = RIDER SAW





ier 4 Final

Powered By





20" Blade Capacity Diesel

FEATURES

14" & 20" Blade Guards Included

- Tier 4 Final Deutz® diesel engine
- Fast driving speed out of the cut with 0-300 fpm
- · Zero turn radius steering
- Hydraulically assisted power steering
- 2" double row tapered roller blade shaft bearings
- Vibration isolated adjustable seat and foot rest
- Fully enclosed belt guard keeps belts free of slurry for longer life
- Front wheels are adjustable for green sawing or random crack sawing
- Inboard bearing support for easy belt removal
- Hydrostatic ground drive allows precise speed control
- Blade raise/lower switch is incorporated in joystick for ease of operation
- Three-stage engine air intake filter
- Three lights for night sawing
- Right-side blade mounting only
- Automotive-style sealed front wheel bearings
- Digital read out engine control panel includes tachometer, oil pressure, water temperature and hour meter

CC7875DT4 EZ RIDER SAW



CC7875DT4 EZ RIDER DIESEL SAW - 74 HP					
Model #	Engine Make	Part #	Cat #	Product Weight (lbs.)	Blade Capacity
CC7875DT4	Deutz® Turbo	CC7875DT4	103381	2,540	20"



Call our Nampa, ID Facility at 800-225-0142 for more information and pricing.

	SPECIFICATIONS
Engine	Deutz TCD 2.2 75HP Tier 4 Final, liquid-cooled, turbo charged, common rail fuel injection system with DOC exhaust aftertreatment maintenance free operation requiring no regeneration diesel, maximum RPM 2600
Blade Shaft	2" diameter
Dimensions	Length: 79", Wldth: 58", Height: 60", Weight: 2,540 lbs.
Blade Shaft Bearings	2" Double row tapered roller pillow block
Blade Arbor	Industry standard 1" with drive pin
Blade Shaft Drive	3VX540 (10 belts)
Hydraulics	Electric over hydraulic adjustable blade raise/lower. Belt driven hydrostatic ground drive pump.
Electrical	12 Volt electrical system
Travel Speed	0-300 feet per minute
Extra Features	Dual side depth stops, lift frame, water on/off and metering valves, 15 gallon fuel tank, 7 gallon hydraulic tank





CC3574DD RIDER SAW

PRODUCTIVITY IN A RIDE-ON UNIT



Tier 4 Final

Powered By:



14"-60" Blade Capacity

FEATURES

- · Reservoir with clean out access
- · Infinitely variable blade speed
- Programmable depth stop
- Rear drive motor with increased load capacity, higher top speed, integral parking brake
- · Steering actuator for improved control
- · Positive neutral lock for wheel drive
- Large diameter front and rear wheels for better traction
- Trailers itself up to a 12 degree incline
- · Tight turn radius
- · Optional angle arm assembly for angled cutting

Includes: Hour Meter, Tachometer, Telescoping Front Pointer, Adjustable Depth Stop, Cup Holder, Quick Disconnect Flanges, Umbrella

	the state of the s
SPECIFI	CATIONS
Max. Depth of Cut w/ 14" Blade	3-3/4" (6" flange)
Max. Depth of Cut w/ 20" Blade	6-3/4" (6" flange)
Max. Depth of Cut w/ 26" Blade	9-3/4" (6" flange)
Max. Depth of Cut w/ 30" Blade	11-3/4" (6" flange)
Max. Depth of Cut w/ 36" Blade	14-3/4" (6" flange)
Max. Depth of Cut w/ 42" Blade	16-3/4" (7" flange)
Max. Depth of Cut w/ 48" Blade	19-3/4" (8" flange)
Max. Depth of Cut w/ 54" Blade	22-3/4" (9" flange)
Max. Depth of Cut w/ 60" Blade	23-3/4" (10" flange)
Engine Model	Deutz 2.9 Turbo L4 Tier 4 Final
Max. Engine Power	74 HP
Blade Shaft Diameter	2-1/2"
Arbor Size	1" w/single drive pin
Blade Shaft Drive	Hydraulic motor
Blade Mounting	Right side
Blade Raise/Lower	Hydraulic, solenoid valve controlled
Transmission	Variable displacement hydraulic
	pump & motor
Air Filter	8" Donaldson Alexin
Fuel Capacity	9.5 gallons

Blade not included

CCS574DD RIDER SAW



CC8574DD RIDER SAW					
Model #	Engine Make	Part #	Cat #	Blade Capacity	Product Weight (lbs.)
CC8574DD-14	Deutz	5803300	78895	14"	3,715
CC8574DD-20	Deutz	5803301	78928	20"	3,725
CC8574DD-26	Deutz	5803302	78949	26"	3,741
CC8574DD-30	Deutz	5803303	78951	30"	3,749
CC8574DD-36	Deutz	5803304	78995	36"	3,763
CC8574DD-42*	Deutz	5803305	78997	42"	3,772
CC8574DD-48*	Deutz	5803306	79001	48"	3,794
CC8574DD-54*	Deutz	5803307	79020	54"	3,870
CC8574DD-60*	Deutz	5803308	79139	60"	3,900

Horsepower and Torque as rated by the engine manufacturer. *42" to 60" models include deep cut gearbox.

CC8574DD BL	ADE GU	ARDS
Description	Part #	Cat #
14" Tapered Mount Blade Guard	6010950	20011
20" Tapered Mount Blade Guard	6010952	08213
26" Tapered Mount Blade Guard	6010954	19322
30" Tapered Mount Blade Guard	6010956	20456
36" Tapered Mount Blade Guard	6010958	13375
42" Tapered Mount Blade Guard	6010960	08216
48" Tapered Mount Blade Guard	6010962	24618
54" Tapered Mount Blade Guard	6010614	99721
60" Tapered Mount Blade Guard	6010616	70666

CC8574D	D OPTIC	INS
Description	Part #	Cat #
Angle Cutting Arm Assembly Conversion Kit	6040159	22965
Water Pump Kit	6016662	68495
Blade spacing kit-6" flange (for blades 1-1/2" apart)	6010630C	17000
Blade spacing kit-6" flange (for blades 2" apart)	6010631C	21357
Blade spacing kit-6" flange (for blades 4" apart)	6010632C	17592
Large blade gearbox kit 42"	6016682	68496
Large blade gearbox kit 48"	6016683	68499
Large blade gearbox kit 54"	6016684	68500
Large blade gearbox kit 60"	6016685	68554



Digital User Interface (7"):

- Engine and blade speed
- Engine and hydraulic fluid temperature
- Fuel level
- · Hydraulic low level and blade over speed warning



New rear wheel drive bracket for greatly improved strength and reduced hose swing projection. Rear kingpin design with tapered roller bearings in a fully sealed cartridge for greatly improved strength and reliability

Tight Turning Radius & Integral Parking Brake

Multiple access doors and pivoting hood provide quick access to all filters and hydraulics for ease of maintenance



CC114HCS cure currer



FEATURES:

- 114HP Tier 4 Kubota V3800 diesel engine
- Full time all wheel drive (AWD)
- · Robust redesigned hydraulic system
- CAN-based electronic drive by wire controls
- 20 +/- blade angle control in the pitch and roll direction with 30" blade
- Ergonomic operator control station
- 50 gallon on-board water/diesel tanks
- LED lighting including strobes, work, safety, and backup lights
- . Blade angle sensors in the X & Y axis
- Through hub blade water system
- Auxiliary hydraulic capacity



SPECIF	ICATIONS
Length	148"
Width	66"
Height	76"
Wheelbase	110" x 49"
Weight	7200 lbs. (Approx.)
Wheelbase	110" x 49"

CC114HCS CURB CUTTER - 114HP				
Model #	Model # Engine Make		Cat #	Blade Capacity
CC114HCS	Kubota V3800 Tier 4 Diesel	5801585	108439	36"









14" Blade Capacity **Electric**

FEATURES

- Wet or dry cutting
- Overload protection with load warning LED light
- Detachable guide rollers
- Splash guard to protect from water spray Handles designed for optimal control Tool-free blade guard angle adjustment

- Lightweight magnesium blade guard Externally accessible motor brushes
- Standard water feed system with fine adjustable flow and quick release coupling and durable hose

C14 OPTIONS

Description	Part #	Cat #
C14 Vacuum Skid	6078496	80698

C14

SPECIFICATIONS

Power Input	15 Amp
Voltage	120 Volt
RPM	4500
Arbor	1"
Max. Cutting Depth	5"
Cut Direction	Down
Weight	22 lbs. (23 lbs. with guide rollers)

C14PRO **SPECIFICATIONS**

Power Input	25 Amp
Voltage	120 Volt
RPM	4500
Arbor	1"
Max. Cutting Depth	5"
Cut Direction	Down
Weight	22 lbs. (23 lbs. with guide rollers)

C14 HANDHELD ELECTRIC SAWS

Model #	Motor Power	Power Source	Part #	Cat #
C14	15A/120V	Electric	5801601	48975
C14	15A/230V	Electric	5801606	73939
C14PRO	25A/120V	Electric	5801620	74267

C15 ELECTRIC FLUSH-CUT HAND-HELD SAW





FEATURES

Wet or dry cutting

Electric

- Overload protection with load warning LED light-visible to operator
- · Detachable guide rollers
- Spring-loaded splash guard to protect from water spray
- · Handles designed for optimal control
- Tool-free blade guard angle adjustment

16" Blade Capacity

- · Lightweight magnesium blade guard
- Externally accessible motor brushes
- Standard water feed system with fine adjustable flow and quick release coupling and durable hose

C16 HAND-HELD ELECTRIC SAW

Model #	Motor Power	Power Source	Part #	Cat #
C16	25A/120V	Electric	5801605	72378

Removable guard side for flush cutting (Flush-cut bolt pattern required on blade to cut flush)

C16 SPECIFICATIONS

Power Input	25 Amp
RPM	3900
Arbor	1" plus Long Year Flush Cut
Max. Cutting Depth	6"
Cut Direction	Down
Weight	24 lbs. (25 lbs. with guide rollers)

C16 OPTIONS

Description	Part #	Cat #
EZ CORD Adapter - 12" long cord -12AWG - 115V 30 Amp Twist L5-30C / 5-15P to 15 Amp	4699131	94366
C16 Vacuum Skid	6078502	05225

REFERENCI COUT

FEATURES

- The FU6D recognizes the connected machine and controls each connected machine individually.
- Light-weight and easy to carry around the job site.
- Keypad and Bluetooth interface integrated.

FU6D INVERTER		
Description	Part #	Cat #
FU6D Inverter	5801629	102141



Digital screen that offers tool recognition, diagnostics and operating conditions.

FU6D SPECIFICATIONS		
Power	230V, 16amp (3700 Watt) 1PH 460V, 11.5 amp (6500 Watt) 3PH	
Weight	15 lbs.	
Dimensions	Length: 11.5", Height: 7.5", Width: 8"	

For use with generator sizes: 230V, single phase - 4KW 460V, three phase - 11KW



Included Standard 480V plug is the same as WSE1621



Includes cord whip for 230V single phase plug is standard generator L14-30P



CHOICE SYSTEM HIGH GYOLE EQUIPMENT



WHY USE HIGH CYCLE?

- High productivity
- Increased power
- Consistent performance without power fluctuations
- Lighter-weight offers safer operation
- Environmentally friendly versus hydraulic equipment



FU6D Is For Use On All High Cycle WEKA Equipment.



FEATURES

- Cuts deeper than standard hand saws
- Rugged drive system
- Easy blade tensioning system
- High quality, light-weight aluminum as used on all Weka High Cycle products
- Ergonomic adjustable handle

TR40 SPECIFICATIONS		
Power	230V, 16 amp (3700 watt) 1PH 460V, 11.5 amp (6500 watt) 3PH	
Cutting Depth	12"	
Weight	30 lbs.	
Dimensions	Length: 31.5", Height: 20.5", Width: 11"	

TR40 RING SAW			
Description	Part #	Cat #	
TR40 High Cycle Ring Saw with Flush Cut Guard	2600909	84114	
16" x .165" Heavy Duty Weka Ring Saw Blade	RSHWK16165M16	99432	
16" x .235" Heavy Duty Weka Ring Saw Blade	RSHWK16235M16	19045	

CSE16HF CHAIN SAW

12" & 14" Chain/Ear Capacity

CSE16HF	SPECIFICATIONS
Power	230V, 16 amp (3700 watt) 1PH 460V, 11.5 amp (6500 watt) 3PH

Length: 28", Height: 12", Width: 10"

24 lbs.



Weight Dimensions

FEATURES

- Ergonomic, adjustable handle design
- Ideal for cutting small openings, corner cuts and very deep cuts as close to the wall as possible
- Large selection of chains and bars vs. the competition

CSE16HF CHAIN SAW				
Description	Part #	Cat #		
CSE16HF Chain Saw	2600907	74774		
3/8" ACCESSORIES	3			
Drive Sprocket	6049139	84950		
Bar, 12" with 3/8" pitch	6049140	52921		
12" Premium Diamond Chain for General Purpose Concrete - 58 Segments	DCCG5812PG	52944		
12" Pro Diamond Chain, 5.7mm Width, 58 segments	DCCGP5812PG	73311		
Bar, 14" with 3/8" pitch	6049152	83143		
14" Premium Diamond Chain for General Purpose Concrete - 64 Segments	DCCG6414PG	82658		
14" Pro Diamond Chain, 5.7mm Width, 64 Segments	DCCGP6414PG	73314		
16" Premium Diamond Chain for General Purpose Concrete - 70 Segments	DCCG7016PG	84952		
16" Pro Diamond Chain, 5.7mm Width, 70 Segments	DCCGP7016PG	92606		
Bar, 16" with 3/8" pitch	6049141	84951		
DIRECT FIT ACCESSO	RIES			
Bar - 12" Direct Fit	6049157	105567		
Bar - 16" Direct Fit	6049158	102457		
Bar - 20" Direct Fit	6049174	108900		

ROTOR JUIN 6 POH

HD16 DRILL MOTOR

3" (hand-held)

6" (mounted) Bit Capacity



- Oil-bath lubrication
- Safety clutch
- Leveling device
- Closed, water-cooled high frequency electric motor
- Waterproof protection class IP 55
- Can be mounted on our M-3 and M-4 core rig stands

HD16 SPECIFICATIONS

Power	3700 Watt
3-Speed RPM	630/1400/2900
Weight	16 lbs.
Dimensions	Length: 17", Height: 11.5", Width: 5"



Includes Heavy Duty Carrying Case, Wrench and Adapter

TS40 HAND SAW			
Description	Part #	Cat #	
HD16 High Cycle Drill Motor	2600904	74773	



16" Blade Capacity





Blade not included

Power 230V, 16 amp (3700 watt) 1PH 460V, 11.5 amp (6500 watt) 3PH 6-1/2"

Arbor 1"
Weight 23 lbs.

Dimensions Length: 30", Height: 15", Width: 11"

FEATURES

- Ergonomic, adjustable handle design
- Flush cut blade guard
- Closed, water-cooled high frequency electric motor
- Splash-proof water protection class IP 55

TS40F HAND SAW					
Description	Part #	Cat #			
TS40F High Cycle Flush Cut Hand Saw		2600927	110577		
FLUSH CUT BLADES F	OR TS40F				
Description	Bond	Part #	Cat #		
16" x .125" Heavy Duty Orange for Hard Concrete, Long Life	H7H	HH16126UNVHC	102033		
16" x .125" XL-Turbo for General Concrete, Fast Cutting	T7XL	TXL16125HC	102034		
16" x .235 x WEKA Flush Cut H.D. Orange for Very Hard Concrete with M16 Segments H5HM-16		HH16235M16	101241		
16" x .250 x WEKA Flush Cut H.D. Orange for Very Hard Concrete with M16 Segments	H5HM-16	HH16250M16	101242		
16" x .140" x 1" TGD Wet Wall Saw Blade with 20MM Segments	W41SPHTGD-20	WSP16140TGDMM	101573		
16" x .236" x 1" TGD Wet Wall Saw Blade with 20MM Segments	W41SPHTGD-20	WSP16236TGDMM	74749		
16" x .250" x 1" TGD Wet Wall Saw Blade with 20MM Segments	W41SPHTGD-20	WSP16250TGDMM	102241		



HYDRAULIC HAND SAWS



HS Saries Standard (Fixed) Guard FEATURES

- Single trigger
- Lightweight aluminum frame
- Overhung load adapter
- Manual water valve
- Casappa® hydraulic motor
- Down cut

HS SERIES-FLUSH CUT WITHOUT COVERS

Blade Capacity/ Guard Type	(GPM) Gallons Per Minute	Part #	Cat #	Product Weight (lbs)
20" Flush Cut	8 gpm	5801371	71058	31
20" Flush Cut	10 gpm	5801372	50463	31
20" Flush Cut	12 gpm	5801373	94878	31
20" Flush Cut	15 gpm	5801374	81451	31
24" Flush Cut	8 gpm	5801375	50465	34
24" Flush Cut	10 gpm	5801376	50319	34
24" Flush Cut	12 gpm	5801377	94076	34
24" Flush Cut	15 gpm	5801378	80458	34
Cover for Flush Cut 20" hand saw		2502559	80750	4
Cover for Flush Cut 24" hand saw		2503508	87129	5

HS Sarles Flysh Gut without Gover FEATURES

- Single trigger
- Light weight aluminum frame
- Overhung load adapter
- Manual water valve
- Casappa® hydraulic motor
- Down cut
- Flush cut hub
- Bolt on blade guard optional

HS SERIES-STANDARD GUARD					
Standard Blade Capacity	(GPM) Gallons Per Minute	Part #	Cat #	Product Weight (lbs)	
16"	10 gpm	5801360	68005	31	
16"	12 gpm	5801361	15210	31	
16"	15 gpm	5801362	35393	31	
20"	8 gpm	5801363	91407	33	
20"	10 gpm	5801364	95255	33	
20"	12 gpm	5801365	86118	33	
20"	15 gpm	5801366	80760	33	
24"	8 gpm	5801367	97183	37	
24"	10 gpm	5801368	50461	37	
24"	12 gpm	5801369	92375	37	
24"	15 gpm	5801370	80466	37	



Hand saw carts make horizontal cutting easier and eases operator fatigue FLUSH CUT ONLY

FLUSH CUT HAND SAWS					
Description	Part #	Cat #	Product Weight (lbs)		
Cart-20" Hydraulic Hand Saw	6087146	25538	45		
Cart-21" Hydraulic Hand Saw	6087148	17624	46		
Cart-24" Hydraulic Hand Saw	6087147	21803	48		
Cart-25" Hydraulic Hand Saw	6087149	76037	50		

CARTS FOR HS SERIES



Pro Saries Flush Cut FEATURES

- Dual trigger
- · Light weight aluminum frame
- Trigger activated water valve
- Overhung load adapter
- Casappa® hydraulic motor
- Down cut
- Flush cut with removable guard
- 24.00" whip hoses included

PRO SERIES HYDRAULIC FLUSH CUT

Flush Cut Blade Capacity	(GPM) Gallons Per Minute	Part #	Cat #	Product Weight (lbs)
21"	8 gpm	5800850	03958	39
21"	10 gpm	5800851	07210	39
21"	12 gpm	5800852	05818	39
21"	15 gpm	5800853	15005	39
25"	8 gpm	5800854	08693	41
25"	10 gpm	5800855	15199	41
25"	12 gpm	5800856	06345	41
25"	15 apm	5800857	15201	41



HS Series Light Weight Standard (Fixed) Guard

FEATURES

- Single trigger
- Light weight aluminum frame
- Manual water valve
- Casappa® hydraulic motor
- Down cut
- Our lightest weighing hydraulic hand saw

PRO SERIES LIGHT WEIGHT-FLUSH CUT

Blade Capacity/ Guard Type	(GPM) Gallons Per Min	Part #	Cat #	Product Weight (lbs)
21" Flush Cut	8 gpm	5800860	14392	35
21" Flush Cut	10 gpm	5800861	14393	35
21" Flush Cut	12 gpm	5800862	12203	35
21" Flush Cut	15 gpm	5800863	14397	35
25" Flush Cut	8 gpm	5803013	59260	37
25" Flush Cut	10 gpm	5803014	59265	37
25" Flush Cut*	12 gpm	5801340	53154	37
25" Flush Cut	15 gpm	5803016	59274	37

Manual Meter Valve

LIGHT WEIGHT-STANDARD (FIXED) GUARD

(FIXED) GUARD					
Blade Capacity/ Guard Type	(GPM) Gallons Per Min	Part #	Cat #	Product Weight (lbs)	
20" Standard Cut	8 gpm	5800864	47148	30	
20" Standard Cut	10 gpm	5800865	47149	30	
20" Standard Cut	12 gpm	5800866	15226	30	
20" Standard Cut	15 gpm	5800867	47150	30	
24" Standard Cut	10 gpm	5803009	89349	33	
24" Standard Cut	12 gpm	5803010	28009	33	
24" Standard Cut	15 gpm	5803011	65004	35	



MINI-DRAGON ELECTRIC RING SAWS

8.5" - 12-1/2" Cutting Depth







Includes Wear Plate



CAUTION-WET CUTTING ONLY Use only in precut material to ensure safe operation. EMDS-115 EMDS-230



12" & 16" Blade Capacity Electric

FEATURES

- Best power transfer to blade-where it is needed
- 1/3 less cutting cost than chain sawing
- Eliminates over cuts on corners
- · Electronic overload with warning light
- Heavy duty splash guard
- · Spring loaded blade guard
- · Up to three times faster than chain sawing
- Diamond blade life up to five times longer-saves you money
- Light weight and easy to handle-22 lbs.



For Use With Our Dragon Claw Ring Saw Blades

MINI-DRAGON ELECTRIC RING SAWS

Model #	Motor Power	Part #	Cat #	
EMDS-115	115V, 23 amp	5801602	64540	
EMDS-230	230V, 15 amp	5801603	64998	

HEAVY DUTY ORANGE WET DRAGON CLAW RING BLADES WITH WEAR PLATE

SIZE	C41HM-16 CAT#	C42HM-16 CAT #	CRSDR18HM-16 CAT#	CRSDR20HM-16 CAT#
12" x .155			69664	77770
16" x .155	29301	93866	61775	38330
20" x .155	29303	93865	61781	16362

DRAGON RING SAWS





CAUTION- WET CUTTING ONLYUse only in precut material to ensure safe operation.

DragonSaw

Suggested Mobile Power Unit Models for Use with the HDS60 Ring Saw: CB18BVXL, CB20EXL, CB22HXL, CB35BVXL

20" Blade Capacity **Electric**



Certified





Blade not included

HDS60-12

HDS60 SPECIFICATIONS

PSI	2000 (2500 Max.)
Weight	29.8 lbs.
Connections	1/2" hose (approx 12" length)

FEATURES

- The ONLY hand saw capable of cutting up to 16" deep in concrete or block
- Best power transfer to blade-where it is needed
- 1/3 less cutting cost than chain sawing
- Eliminates over cuts on corners
- Up to three times faster than chain sawing
- Diamond blade life up to five times longer
- Light weight and easy to use

	DRAGON RING SAWS					
Model #	Engine Motor Power	Power Source	Part #	Cat #		
HDS60-8	8 GPM	Hydraulic	5801523	87796		
HDS60-12	12 GPM	Hydraulic	5801535	53486		
EDS60-115	115V, 30amp	Electric	5801533	46095		
EDS60-230	230V, 15amp	Electric	5801536	53995		

EDS60 SPECIFICATIONS

EDS60-115 EDS60-230

Power Head	Weka RS30	
Power	115V, 30A, 3200W 230V, 15A, 3200W	
Overload	Electronic	
Weight	34 lbs.	

20" blade on gas & electric are for light duty materials only *Include wear plate

SPECIFICATIONS ALL DRAGON

Min Blade Diameter	16":
Max Blade Diameter	20"
16" Blade Cutting Depth	12"
20" Blade Cutting Depth	16"
Blade Cooling	Water cool only
Blade Cooling	(no dry cutting)

DRAGON RING SAW ACCESSORIES

Description	Part #	Cat #
Wear Plate (not included with saw) For saws before 2022	6061184	86515
Wear Plate (not included with saw) For saws after 2022	6061474	108168
Guide Roller	6061253	60574
#12 Drive Wheel without Groove	6061186	88528
#13 Drive Wheel with Groove	6061187	88560



CSE12 - 12" Bar Capacity Electric FEATURES

- 12" maximum cutting depth
- · Electronic overload and thermal protection
- · LED load indicator allows cutting at maximum efficiency
- · Built-in levels for accurate cutting alignment

CSE12 ELECTRIC CHAIN SAW						
DIAMOND PRODUCTS						
Description	Part #	Cat #	Weight lbs)			
CSE12 Electric Chain Saw (110V)	5801623	90886	12			
CSE12 Electric Chain Saw (230V)	5801626	100090	12			
Sprocket for CSE12 (3/8" pitch)	6049160	73280	.5			
12" Bar for CSE12 (3/8" pitch)	6049161	73299	2			
12" Chain for CSE12 (3/8" pitch)	DCCC5013PG	100091	1			
CSE12 Package (110V)	5801623PKG	100696	18			
CSE12 Package (230V)	5801626PKG	100758	18			

Includes 3/8" Sprocket. Chain and bar only included in packages

FOR FORGE-STYLE SAWS

F4 Style Chain/Bar/Sprocket



Direct Fit Chain for Force-Style Bars & Sprockets

DIRECT FIT COMPETITOR CHAIN & BARS				
Description	Part #	Cat #		
15" Direct fit Heavy Duty chain - 59 segments	DCCCD5915HD	108901		
20" Direct fit Heavy Duty chain - 69 segments	DCCCD6920HD	108902		
25" Direct fit Heavy Duty chain - 81 segments	DCCCD8125HD	108903		
30" Direct fit Heavy Duty chain - 92 segments	DCCCD9230HD	111637		
15" Direct fit bar (fits competitor saws 853/880/890)	6049154	101422		
16" Direct fit bar (fits competitor saws K960/970)	6049158	102457		
20" Direct fit bar (fits competitor saws 853/880/890)	6049155	105565		
25" Direct fit bar (fits competitor saws 853/880/890)	6049156	105566		
12" Direct fit bar (fits competitor saws K960/970)	6049157	105567		
Drive sprocket, Direct Fit (Weka & competitor saws K960/970)	6049169	105336		
Drive sprocket Direct Fit (competitor saws 853/880 Pro)	6030703	108898		
Drive sprocket Direct Fit (competitor saws 890)	6030704	108899		



CSE15HF

CORE CUT

WEKA 05=16HF - 12"/14"/16" Bar Capacity Electric (High Gyele)

FEATURES

- · High cycle and high productivity
- Longer lasting equipment and increased efficiency
- · Lower maintenance
- Increased power that allows for maximum cutting
- Consistent performance without power fluctuations
- · Rugged operation for less tool wear
- Part of THE CHOICE SYSTEM of high cycle equipment

WEKA CSE16HF HIGH FREQUENCY CHAIN SAW					
Description	Part #	Cat #	Weight lbs)		
CSE16HF Weka Chain Saw 12"/14" w/o Inverter	2600907	74774	21		
WEKA FU6D Power Inverter 230V, 16amp (3700 Watt) 1PH 460V, 11.5 amp (6500 Watt) 3PH	5801629	102141	25		

Includes 3/8" Sprocket. Chain and bar not included

12" CHAINS BAR & SPROCKET - WEK	A CSE16H	P
Description	Part #	Cat #
Bar - 12" (3/8" pitch)	6049140	52921
12" Diamond chain concrete Premium general purpose with 64 segments (3/8" pitch)	DCCG5812PG	52944
Bar - 12" Direct Fit	6049157	105567
12" Heavy Duty Direct Fit diamond chain with 50 segments for heavy duty jobs	DCCDG5012HD	111636
14" CHAINS, BAR & SPROCKET - WEK	A CSE16H	F
Bar - 14" 3/8" pitch	6049152	83143
14" Diamond Chain Concrete Premium General Purpose with 64 Segments (3/8" pitch)	DCCG6414PG	82658
14" Diamond Chain Concrete Premium General Purpose Special 5.7mm width, 64 segs	DCCGP6414PG	73314
16" CHAINS, BAR & SPROCKET - WEK	A CSE16H	F
Bar - 16" (3/8" pitch)	6049141	84951
16" Diamond chain concrete Premium general purpose with 64 segments (3/8" pitch)	DCCS6416PG	37023
16" Diamond chain concrete Premium general purpose Special 5.7mm width, 70 segs	DCCGP7016PG	92606
Bar - 16" Direct Fit	6049158	102457
16" Heavy Duty Direct Fit diamond chain with 59 segments for heavy duty jobs	DCCDG5916HD	108867
20" CHAINS, BAR & SPROCKET - WEK	A CSE16H	7
Bar - 20" Direct Fit	6049174	108900
20" Diamond Chain Concrete Premium General Purpose with 68 Segments (3/8" pitch)	DCCDG6820HD	111196
ACCESSORIES FOR WEKA CSE	16HF	
Drive sprocket for Weka Chain Saw	6049139	84950
Drive sprocket for Weka Chain Saw - Direct Fit	6049169	105336
Chain assembly kit	6049132	81840



E/E^{II} Chain/Ban/Sprocket



CSH24 - 12"-24" Bar Capacity Hydraulic

FEATURES

- Unique bar mount design allows you to flush cut to the wall, floor or ceiling
- Cuts 1.5" deeper than the competition
- Runs much quieter than gas powered saws
- Our own bar and chain-available in sizes 12", 16", 20' and 24"
- Minimum hydraulic supply: 10 GPM, maximum: 12 GPM

CSH24 FLUSH CUT CHAIN SAW DIAMOND PRODUCTS

Description	Part #	Cat #	Weight (lbs)	
CSH24 Flush Cutting Hydraulic Chain Saw	5801010	55079	27	

Includes 3/8" Sprocket. Chain and bar not included

12" BAR & CHAINS FOR DIAMOND PROD	UCTS CSH	124
Description	Part #	Cat #
Bar - 12" (3/8" pitch)	6049134	99278
12" Premium, fast cutting diamond chain with 62 segments (3/8" pitch)	DCC6212PG	80532
12" Extreme Pro diamond chain with 62 segments for rugged extreme jobs (3/8" pitch)	DCCP6212PG	56913
Bar - 12" Direct Fit	6049173	105614
12" Heavy Duty Direct Fit diamond chain with 52 segments for heavy duty jobs	DCCD5212HD	111239
16" BAR & CHAINS FOR DIAMOND PROD	UCTS CSH	124
Bar - 16" (3/8" pitch)	6049135	84208
16" Premium, fast cutting diamond chain with 74 segments (3/8" pitch)	DCC7416PG	80694
16" Extreme Pro diamond chain with 74 segments for rugged extreme jobs (3/8" pitch)	DCCP7416PG	43048
Bar - 16" Direct Fit	6049170	105602
16" Heavy Duty Direct Fit diamond chain with 62 segments for heavy duty jobs	DCCD6216HD	108870
20" BAR & CHAINS FOR DIAMOND PROD	UCTS CSH	124
Bar - 20" (3/8" pitch)	6049136	99285
20" Premium, fast cutting diamond chain with 86 segments (3/8" pitch)	DCC8620PG	81787
20" Extreme Pro diamond chain with 86 segments for rugged extreme jobs (3/8" pitch)	DCCP8620PG	82607
Bar - 20" Direct Fit	6049171	105615
20" Heavy Duty Direct Fit diamond chain with 72 segments for heavy duty jobs	DCCD7220HD	108873
24" BAR & CHAINS FOR DIAMOND PROD	ucts esh	124
Bar - 24" (3/8" pitch)	6049137	18709
24" Premium, fast cutting diamond chain with 98 segments (3/8" pitch)	DCC9824PG	81789
24" Extreme Pro diamond chain with 98 segments for rugged extreme jobs (3/8" pitch)	DCCP9824PG	82657
Bar - 25" Direct Fit	6049172	105616
25" Heavy Duty Direct Fit diamond chain with 82 segments for heavy duty jobs	DCCD8225HD	108871
ACCESSORIES FOR CSH24		
Link with Segment	6049133	81841
Drive sprocket for CSH24 Chain Saw with 3/8" Pitch	6049138	84925
Drive sprocket for CSH24 Chain Saw with Direct Fit	6049164	102468
Chain assembly kit	6049132	81840

DIAMOND CHAINS, BARS & SPROCKETS





3/8" CHAIN & BAR SPROCKETS - COMPETITOR EQUIPMENT		
Description	Part #	Cat #
Drive sprocket chain saw (with clip) 890 Saw	6049142	85323
Drive sprocket chain saw 823/853/880*	6049143	85310
TRANS TORQUE 14MM SHAFT 8GPM 823/853 chain saws	6049144	85313
TRANS TORQUE 16MM SHAFT 12GPM 853+/880F4	6049145	40181
Chain assembly kit	6049132	81840
15" bar with 3/8" pitch for 853/880/890 chain saws	6049146	85314
19" bar with 3/8" pitch for 853/880/890 chain saws	6049147	40582
24" bar with 3/8" pitch for 853/880/890 chain saws	6049148	40654
30" bar with 3/8" pitch for 853/880/890 chain saws	6049149	40686

3/8" Bar for Competitor Chain Saws



3/8" DIAMOND CHAIN - COMPETITOR EQUIPMENT			
Description	Part #	Cat #	
15" Premium, Competition-Style General Purpose Diamond Chain with 66 Segments (3/8" pitch)	DCCC6615PG	85322	
19" Premium, Competition-Style General Purpose Diamond Chain with 78 Segments (3/8" pitch)	DCCC7819PG	40699	
24" Premium, Competition-Style General Purpose Diamond Chain with 94 Segments (3/8" pitch)	DCCC9424PG	40755	
30" Premium, Competition-Style General Purpose Diamond Chain with 110 Segments (3/8" pitch)	DCCC11030PG	40776	
15" Extreme Pro diamond chain with 66 segments for rugged heavy duty jobs (special wide) (3/8" pitch)	DCCCP6615PG	82520	
19" Extreme Pro diamond chain with 78 segments for rugged heavy duty jobs (special wide) (3/8" pitch)	DCCCP7819PG	82602	
24" Extreme Pro diamond chain with 94 segments for rugged heavy duty jobs (special wide) (3/8" pitch)	DCCCP9424PG	82603	

3/8" CHAIN & BAR SPROCKETS COMPETITOR EQUIPMENT GAS & ELECTRIC			
Description	Part #	Cat #	
DRIVE SPROCKET for K950/K960/K970 chain saws	6049153	82489	
DRIVE SPROCKET for 603/Redzaw, IC613/633/680 and Husq K6500	6049139	84950	
12" BAR for ICS 613/633/680 and Husq K960/K970	6049140	52921	
14" BAR for ICS 613/633/680/695 and Husq K950/K960/K970	6049152	83143	
16" BAR for ICS 633/695 and Husq K950/K960K970	6049141	84951	
16" BAR for Stihl GS 461 Rock Boss	6049150	37025	
12" Premium, fast cutting diamond chain with 58 segments (3/8" pitch)	DCCG5812PG	52944	
14" Premium, fast cutting diamond chain with 64 segments (3/8" pitch)	DCCG6414PG	82658	
16" Premium, fast cutting diamond chain with 70 segments	DCCG7016PG	84952	
16" Premium, fast cutting diamond chain for Stihl saw with 64 segments	DCCS6416PG	37023	
12" Diamond Chain Concrete Premium General Purpose Special 5.7mm width, 58 segs	DCCGP5812PG	73311	
14" Diamond Chain Concrete Premium General Purpose Special 5.7mm width, 64 segs	DCCGP6414PG	73314	
16" Diamond Chain Concrete Premium General Purpose Special 5.7mm width, 70 segs DCCGP7016PG 92606			







CC1600 WALL SAWING SYSTEMS



CC1600 WALL SAWS			
DESCRIPTION	PART#	CAT#	
CC1600-3.8PA Auto Travel Wall Saw Package * with tracks, 36" guard & aluminum track feet (LY style)	5800933	79609	
CC1600-5.2PA Auto Travel Wall Saw Package* with tracks, 36" guard & aluminum track feet (LY style)	5800934	81683	
CC1600-3.8PS Auto Travel Wall Saw Package* with stiffened track, 36" guard & steel track feet	5800931	78128	
CC1600-5.2PS Auto Travel Wall Saw Package* with stiffened track, 36" guard & steel track feet	5800932	78495	

^{*}Packages include: wall saw head, 36" blade guard, 90" track, 51" track, 4 track feet and tool kit.

35 HP at maximum 30 GPM - 3000 psi

CC1600 WALL SAWING SYSTEMS



CC1600 WALL SAW HEADS & MOTORS

Description	Part #	Cat #
CC1600-3.8 Manual Travel Wall Saw Head with motor and tool kit	5800925	85207
CC1600-3.8 Auto Travel Wall Saw Head with motor and tool kit	5800921	78012
CC1600-5.2 Auto Travel Wall Saw Head with motor and tool kit	5800922	78416
Cross 3.8 cubic inch hydraulic motor	2600375	83144
Cross 5.2 cubic inch hydraulic motor	2600092	52158

CC1600 WALL SAW TRACK			
Description	Part #	Cat #	Product Weight (lbs)
40" track without stiffener *	6050166	48574	17
51" track without stiffener *	6050167	47639	23
90" track without stiffener *	6050168	46856	37
120" track without stiffener *	6050169	47523	50
144" track without stiffener *	6050197	72750	100
40" track with stiffener **	6050161	48575	29
51" track with stiffener **	6050162	48576	37
90" track with stiffener **	6050163	48577	37
120" track with stiffener **	6050164	48578	82

^{*} Use with standard aluminum track foot-Part # 4400106 - See below

^{**} Use with steel track foot-Part # 6050130 - See below

CC1600 TRACK STIFFENER			
Description	Part #	Cat #	Product Weight (lbs).
40" stiffener only	6050191	48579	15
51" stiffener only	6050192	48580	20
90" stiffener only	6050193	48581	33
120" stiffener only	6050194	48582	44

CC1600 TRACK FOOT SYSTEM & TRACK FEET

& TRACK FEET				
Description	Part #	Cat #	Product Weight (lbs).	
Angle track foot assembly	6050212A	70917	12	
Angle stiffener foot	6050212B	71084	8	
Angle track & stiffener foot assembly	6050212C	71085	19	
Steel track foot for stiffened track	6050130	48583	16	
Stair track foot *	6050150	48585	16	
Standard aluminum track foot	4400106	01942	8	
Rotating track foot	3401451	02465	10	
XL track foot assembly, aluminum for un-stiffened track	4400417	74414	24	

^{*} Requires stiffened track

CC1600 OPTIONAL WALL SAW CARTS

Description	Part #	Cat #	Product Weight (lbs).
Cart for CC1600 Wall Saw	5800972	31060	140



Steel Track Foot



Wall Saw Cart



CC1600 WALL SAW BLADE GUARDS



STANDARD-ONE AND TWO PIECE GUARDS-2" WIDE



TWO-PIECE BLADE GUARDS WITHOUT WATER TUBES

BLADE CAPACITY	TWO PIECE GUARD PART #	TWO PIECE GUARD CAT #
24"	6047038	48586
30"	6047039	48587
36"	6047040	47640
42"	6047041	48588
48"	6047042	48589
54"	6047043	48590
60"	6049013	83259
66"	6049011	86957

Designed for CC1600 & LY1500 Wall Saw.

TWO-PIECE BLADE GUARDS WITH WATER TUBES

VVIII	1 WAIER I	UBE3
BLADE CAPACITY	2-PIECE GUARD PART #	2-PIECE GUARD CAT #
24"	6047000	02587
30"	6047003	02589
36"	6047006	02592
42"	6047009	02595
48"	6047012	02598
54"	6047015	02600
60"	6049014	64690
66"	6049012	28407

Designed for the LY360-35H wall saws with water directed through blade guard (instead of the arm).



ONE-PIECE BLADE GUARDS WITHOUT WATER TUBES

WITHOU	UT WATER	TUBES
BLADE CAPACITY	ONE PIECE GUARD PART #	ONE PIECE GUARD CAT #
24"	6049093	45872
30"	6049094	64406
36"	6049095	45900
42"	6049096	70066
48"	6049097	45917
54"	6049098	46101

Designed for CC1600 and LY1500 wall saws.



ONE-PIECE BLADE GUARDS WITH WATER TUBES

VVIII	WAILS	
BLADE CAPACITY	ONE PIECE GUARD PART #	ONE PIECE GUARD CAT #
24"	6048978	63690
30"	6048979	63692
36"	6048980	63693
42"	6048981	63705
48"	6048982	63711
54"	6048983	63729
60"	6048984	63731
66"	6048985	63773

Designed for CC1600 and LY360-35H wall saws.

CC1600 WALL SAW BLADE GUARDS



FLUSH CUT-ONE AND TWO PIECE, 1" WIDE



TWO-PIECE FLUSH CUT BLADE GUARDS WITHOUT WATER TUBES

Blade Capacity	Part #	Cat #
24"	6047050	84081
30"	6047051	82128
36"	6047052	80042
42"	6047053	82127
48"	6047054	84082
54"	6047055	83770

Designed for CC1600 and LY1500 Wall Saw.

ONE-PIECE FLUSH CUT BLADE GUARDS WITHOUT WATER TUBES

Blade Capacity	Part #	Cat #
24"	6049085	44883
30"	6049086	66822
36"	6049087	44884
42"	6049088	45049
48"	6049089	45089
54"	6049090	45306
60"	6049091	45631
66"	6049092	45734

Designed for CC1600 and LY1500 wall saws.



TWO-PIECE FLUSH CUT BLADE GUARDS WITH WATER TUBES

Blade Capacity	Part #	Cat #
24"	6047020	48595
30"	6047021	46889
36"	6047022	47568
42"	6047023	02602
48"	6047024	47521
54"	6047025	02603

Designed for the LY360-35H wall saws with water directed through blade guard (instead of the arm).



WSE1621 HIGH-CYCLE WALL SAW SYSTEMS



63" Blade Capacity Electric

FEATURES

- Weighs less than other wall saws 51.8 lbs. with head, 35 lbs. without
- More power water-cooled 20 kW HF motor
- Cut depths up to 28", blade capacity up to 63"
- · Bi-Directional blade rotation
- Newly designed, ultra-light and robust, stay-level blade guard
- Compact drive motor and inverter with tool-free quick connection
- Innovative communication color interfaces
- Revolutionary P2® drive technology for extreme reliability without power loss

WSE1621 System Includes:

42" and 86" aluminum track, track connector, V-track aluminum feet, tool box, V-swivel track feet, V-rotary rail support complete, small trolley cart

SPECIFICATIONS

BLADE	
Maximum cutting depth (with 63" blade	28"
Maximum starter blade size	35"
Blade mount	Quick-release flange
MOTOR	
Water cooled high frequency motor	
Output at 32 amp	20 kW, 22.79 horsepower
400-480 Voltage	50 / 60 Hz
WEIGHT	
Wall Saw WSE1621	51.8 lbs.
Electric main drive motor	33 lbs.
Radio remote control	4 lbs.
Blade guard (39")	47 lbs.
Track - 43"	21 lbs.
Track - 65"	33 lbs.
Track 75"	36 lbs.
Track 86"	41lbs.
Trolley Cart	46 lbs.

WSE1621 HIGH CYCLE WALL SAW SYSTEMS

WSE1621 WALL SAW SYSTEM		
Description	Part #	Cat #
WSE1621 Complete Wall Saw Includes: Main motor, Remote control unit, Trolley cart, 40" blade guard, 42" aluminum track, 86" aluminum track, Tools, 4 V-track aluminum feet	5801549	88831
WSE1621 ACCESSORIES		
Angle Track Feet	3400479	74712
V-Rotary/Angle Track Feet	3401451	02465
Aluminum/Steel Track 43" (new G style)	3402051	67409
Aluminum/Steel Track 86" (new G style)	3402050	67408
Aluminum/Steel Track 130" (new G style)	3400888	70232
Track Connector	3402067	70393
Universal adapter mount for main WSE1621 motor to use on CCE25/WSE14 Saws	3404368	68067
WSE1621 BLADE GUARDS		
32" Blade Guard	3401454	92284
48" Blade Guard	3401456	97006
Blade Guard Hook Holder	3400746	47988
32" Blade Guard Flush cut & normal cut - all in one (3-piece)	3402551	31541
40" Blade Guard Flush cut & normal cut - all in one (3-piece)	3402552	80930
48" Blade Guard Flush cut & normal cut - all in one (3-piece)	3402553	30573
56" Blade Guard (2-piece) Requires Hook Holder Part # 3400746	3401979	78577
63" Blade Guard Flush cut & normal cut - all in one (2-piece) *	3400102	01448
63" Blade Guard Uptake	3401457	96966
86" Blade Guard Flush cut & normal cut - all in one (2-pieces)	3400810	66558
Holder for 2-piece blade guard (hook)	3400746	47988

^{*} Indicates blade guards that require blade guard holder: Part # 3400746

HYDROSTRESS WALL SAW MOTORS AND ACCESSORIES

Item	Description	Part #	Cat #
PPH40RR-460	460 Volt with 12 GPM stage	5802256	06685
PPH40RR-575	575 Volt with 12 GPM stage	5802257	12171
BS-2 Remote Control	Remote Control Unit for Hydrostress wall saws	5800112	48601



BS-2 Hydraulic Remote Control Unit

HYDROSTRESS TRACK FEET		
Description	Part #	Cat #
Aluminum Flat Style for Aluminum Track	3402053	67407
Standard Steel for Steel Track	3400480	47702
Rotating Track Foot	3401451	02465

HYDROSTRESS TRACK			
Description	Part #	Cat #	
43" Aluminum/Steel	3402051	67409	
86" Aluminum/Steel	3402050	67408	
43" Steel	2500304	00373	
86" Steel	2500303	00372	
Track Connector *	3402067	70393	

 $^{^{\}star}$ Locks two tracks (2500304 and 2500303 or 3402050 and 3402051) together.



Hydrostress Track





FEATURES

Quick Mount

- · Quick mounting blade flanges make easy removal of blade
- · Up to 40" maximum starter blade without being in the cut

Feed with Worm Drive System

- · Self-locking-no brake necessary
- · Improved seals

2 Handles

· Quick disconnect with 2 handles for fast removal and set up

2-stage gear box

- · Largest ø range in the industry (ø 32" to 86")
- · Safety clutch in front of gear box for better protection
- · Simple re-engage lever in case of blade jams

6 Speeds/Blade Sizes:

32", 40", 48", 63", 70", 78", 86"

Powered by P2® Technology

- · Integrated permanent magnets
- · Reduced motor R.P.M. for reliability and low maintenance
- · High level of efficiency cutting performance

SPECIFICATIONS

BLADE		
Maximum cutting depth	39"	
Blade size over 60" in diameter requires 60mm fla package)	nge system (Included with	
Maximum starter blade size	40"	
Blade mount	Quick-release flange	
DESIGN		
Infinitely adjustable swivel arm rotates 360°		
2 carrying handles with locking function		
MOTOR		
Water cooled high frequency motor with 2 speed gearbox		
Output at 63 amp	26 kW, 35 HP	
POWER PACK/INVERTER INPUT		
Voltage	460 Volt	
Frequency	50Hz/60 Hz	
Output Frequency	400 Hz	
WEIGHT		
Wall Saw WSE2226 including feed motors without main drive blade motor	66 lbs.	
Electric main blade motor only-detachable	53 lbs.	
MINIMUM GENERATOR SIZE REQUIREMENT	50kW	



WSE2226 WALL SAW SYSTEM		
Description	Part #	Cat #
WSE2226 High Cycle Wall Saw System Complete (includes 48" blade guard, wall saw cart and electric control unit with track)	5801534	46473
WSE2226 WALL SAW INDIVIDUAL PAR	RTS	
Aluminum foot for Hydrostress track	3402053	67407
Aluminum/Steel track 43"	3402051	67409
Aluminum/Steel track 86"	3402050	67408
Rotating track foot	3401451	02465
WSE2226 ALL IN ONE FLUSH CUT & STANDARD BLADE GUARDS		
48" Blade Guard Flush cut & normal cut-All in one (3 piece)	3402553	30573
56" Blade Guard Flush cut & normal cut-All in one (2 piece)	3401979	78577
63" Blade Guard Flush cut & normal cut-All in one (2 piece)	3400102	01448
86" Blade Guard Flush cut & normal cut-All in one (2 piece)	3400810	66558



56 Ft. Wire Capacity Electric Hydraulic

FEATURES

- Provides consistent tension and wire speed
- Modular saw disassembles quickly into separate pieces
- · Multiple pulley drive for easy, smooth starting
- Patented drive roller system
- Fast, easy assembly for a one person operation
- · Assembles into separate light-weight pieces for easy wall-mounting
- Compatible with WSE1621, and hydraulic power units

SPECIFICATIONS

Wire Required	11 feet minimum
Max. Wire Storage	41 feet
Drive Rollers	6 - 8" rollers, 1-8" diverter
WCH17 (Hydraulic) Requirements	17-21 GPM Power Unit BS-2 Remote Control
WCE17 (Electric) Requirements	30 kW Power
Weights*	190 lbs. without cover 216 lbs. with cover

*Able to be installed on wall in separate, light-weight pieces

HYDROSTRESS® WCE17 & WCH17 WIRE SAW Cat # Description Part # WCE17 Kit for WSE1621 Wire Saw 5801550 104682 105121 WCE17 High Cycle Wire Saw Complete 5801551 WCH17 Hydraulic WIre Saw Complete 5801552 105420 BS-2 Remote Control Unit (single pump) with 26' Hoses (for WCH17) 5800112 48601



36 Ft. Wire Capacity Electric

FEATURES

- Patented multiple roll drive allows you to start running with minimum wire tension
- Cutting rate increases by 50% compared to conventional systems
- Virtually emission free
- Capable of large demolition jobs



HYDROSTRESS® SB WIRE SAW				
Description	Part #	Cat #	Product Weight (lbs)	
Complete Wire Saw with 40 CC Motor	5802228	60599	375	
BS-2 Remote Control Unit (single pump) with 26' Hoses	5800112	48601	60	

SPECIFICATIONS

Wire Required	14 feet minimum	
Max. Wire Storage	50 feet	
Height	52" H x 29" W x 30" D	
Operation Requirements	23-28 GPM Power Unit BS-2 Remote Control	



CCH25/CCE25 CIRCULAR/PLUNGE WIRE SAW



Electric Hydraulic

FEATURES

- Simple and safe in the application with minimum installation time
- Economical, replaces expensive drill bits
- · Wire sawing instead of drilling opens up new application possibilities.
- Elliptical shaped cutouts are possible.
- · Simple tensioning of the wire
- · Precise flexible water supply

HYDROSTRESS® CC25 CIRCULAR WIRE SAW

Description	Part #	Cat #	Product Weight (lbs)
CCH25 Complete Wire Saw with 22 CC Motor	5802240	74442	296
BS-2 Remote Control Unit (single pump) with 26' Hoses	5800112	48601	60
CCE25 Kit for WSE1217 Circular Wire Saw without Main Motor or Controller/Inverter	5803026	67292	340
CCE25 Kit for WSE1621 less motor and inverter	5803031	102070	350
CCE25 with WSE1621 motor and inverter	5803032	102071	400

HYDROSTRESS® IDLER PULLEYS

Description	Part #	Cat #
8" Idler Pulley	3400896	73031
Idler Pulley Stand	3400895	73030


HYDROSTRESS® PLUNGE WIRE PULLEY ASSEMBLY

Description	Part #	Cat #
Plunge Wire Saw Pulley Assembly Left Side	3402034	68223
Plunge Wire Saw Pulley Assembly Right Side	3402035	68224
Universal Transition Pulley	3404027	73394

SPECIFICATIONS

Min. Diameter	20"
Max. Diameter	98"
Max. Thickness	24"
Wire Requirement	11 feet minimum
Operation Requirement	13-16 GPM Power Unit BS-2 Remote Control

Universal Transition Pulleys



Plunge Wire Saw Pulley Assembly Features:

- Sturdy Design
- Gentle Wire guidance thanks to plastic guide
- Optimal water guidance guaranteed
- Suitable for horizontal and vertical cuts
- Swivel rollers for correct wire guidance
- Fixed in 10" drilled hole
- Wire secured by protective plate



GIEO.



Wire Saw Control Station





BS-2 Hydraulic Remote Control Unit

Unlimited Depth Hydraulic

FEATURES

- No vibration or noise and fast cutting speed
- Modular design provides infinite setup options
- Universal clamps provide infinite orientation of idler wheels
- Bases mount to concrete surface with anchor bolts

Includes

- (1) 8ft. column
- (1) 32" drive wheel,
- (3) mounting bases
- (2) 10" wheels, (2) 16" wheels
- (2) universal clamps
- (3) 3ft. (1) 11ft., (1) 6ft. schedule 80 pipe sections

WS25 WIRE SAW			
Description	Part #	Cat #	
WS25 Wire Saw for use with BS2	5800061	02248	
WS25 Wire Saw for use with Control Station	5800669	09484	
WS25 Flush Cut Wire Saw for Use with BS2	5800621	50169	
WS25 Flush Cut Wire Saw for Use with Control Station	5800622	39314	
Wire Saw Control Station	5800059	02247	
BS-2 Remote Control Unit (Single Pump) with 25' hoses	5800112	48601	

Wire Speed	0-5,000 ft/min-infinitely variable and reversible
Drive Motor	6 ft. stroke driven by Danfoss 1.93 cubic inch hydraulic motor
Sawing Angle	Set up vertical or horizontal from the same frame
Drive Motor	Char-Lynn 9.9 cubic inch hydraulic motor 525 rpm @ 25 GPM
Drive Wheel	32" diameter with neoprene lining in 'V' groove
Idler Wheels	10" and 16" special polyethylene wheels with sealed bearings. 10" and 16" idlers have 1-3/16" shaft for use with universal clamps

SPECIFICATIONS

WS25 ACCESSORIES

For use with 2" schedule 80 pipe

Pipe Mounting

Description	Part #	Cat #		
16" idler wheel	6020025	02581		
10" idler wheel	6020035	02583		
Universal clamp	6020020	02578		
Pipe mounting base	6020000	02565		
24" drive wheel	6020051	79330		
32" drive wheel	6020052	79331		





FEATURES

- Single 25HP high-cycle Compact electric motor that reduces weight and size versus traditional electric motors
- High speed wire cutting that has an adjustable cutting speed up to 25m/s
- Single pneumatic cylinder with simple automatic take up and constant tensioning, completely adjustable by the operator
- 49 ft (15m) total wire take up
- Large storage capacity to make larger cuts without repositioning saw
- Single 16.50" poly-lined drive wheel with replaceable poly-liner. Liners available in 4 different grip levels
- Load adapter drive wheel to motor connection-reduced load on motor to prolong life
- Low entry pull side-reduces danger of broken diamond wire
- Fully positionable guide pulleys
- Low rolling resistance pneumatic tires for easy maneuvering on rough terrain
- Interior spray system allows water to be sprayed directly on drive wheels to cool while cutting
- Includes high-cycle, 460V 7000W control station and hoses

WS30-LE WIRE SAW				
Model #/Description	Part #	Cat #	Product Weight (lbs)	
WS30-XLE High Cycle Wire Saw with 400V Control Station	5802297	47462	780	

SPECIFICATIONS Length 71" Width 30"

780 lbs.

46"

Height

Weight

WIRE SAW ACCESSORIES



HT45 Hydraulic Crimping Tool

Makes it easy to repair or connect diamond wire more easily

HT45 Crimping Tool Jaws

(set of 2 pieces)Measures:

1.100" wide x .355" thick x .830 high







Crimp Jaws Only

Universal Tee

Universal Knuckle



Pipe Mounting Base



8" Idler Pulley



Wire Saw Clamp

M-2 Wire Saw:

- 6' column
- (longer columns available, up to 120")

Plastic Idler

Wheel Assembly

10" and 16"

- Anchor base with wheels
- Roller carriage for increased stability
- Built-in power travel driven by the hydraulic wire saw motor

Wire Saw Head:

Requires 22-27 gpm Requires BS-2 remote

WIRE SAW ACCESSORIES

Description	Part #	Cat #
HT45 Hydraulic Crimping Tool	1400174	68408
HT45 Crimping Tool Jaws	1400297	72310
C-12 Hand Held Wire Cutters	1900073	00159
Screw Connectors	1400180	51176
Wire Connectors 3/8"	1400177	74910
Swivel Connectors	1400178	48176
8" Idler Pulley	3400870	77760
8" idler pulley with clamp	3400896	73031
Universal Tee	6020004	02569
Universal Knuckle	6020002	02567
Wire Saw Clamp	6020003	02568
Pipe Mounting Base Does not come with Flange Bolts Part # 2900164 (4 needed per base)	6020000	02565
Flange Bolts (For Part # 6020000, 6020002, 6020003, 6020004)	2900164	01293
Wire Saw 7 Wheel (90 degree bracket)	6075128	21504
10" Plastic Idler Wheel Assembly	6020035	02583
16" Plastic Idler Wheel Assembly	6020025	02581
Swivel Crimp Pin Tool (For Pin Removal)	860404	67966
Punch Replacement (For Part # 860404)	148130	75678
M-2 Wire Saw with Standard Anchor Base	5802248	99915
M-2 Large Web Anchor Base for Wire Saw	6020045	45606



FEATURES

- Twin 25hp high-cycle compact electric motors: reduces weight and size vs. traditional electric motors
- · Twin pneumatic cylinder take up: simple automatic take up and constant tensioning completely adjustable by operator
- 86' (26m) total wire take up and storage: Large capacity storage for larger cuts and less down time repositioning saw
- Twin 16.50" diameter poly-coated drive wheels: Increases friction on cutting wire
- Load adapter drive wheel to motor connection: Reduces load on motor to prolong motor life
- · Low entry pull side: Reduces danger of broken cutting wire
- Low friction, easily positionable wire guide pulley
- Fully positionable wire guide pulleys
- Multiple positioning/moving options: Load rated lifting rings, integrated for pockets, low resistance free rolling caster
- Interior water spray system: Allows operator to choose to spray water directly on idler wheels and cool cutting wire.

Diamond Wire
Page 36-37

WS50-LE Wire Saw

WS50-LE HIGH-CYCLE WIRE SAW



WS50-LE HIGH-CYCLE WIRE SAW				
Model #/Description	Part #	Cat #	Product Weight (lbs)	
WS50-LE High Cycle Wire Saw with Control Unit (Stainless Steel)	5801622	86582	2,040	

WS50-LE SPECIFICATIONS

Power	25HP, 460V - 700Hz		
Length	99"		
Width	33.50"		
Height	52"		
Woight	1100 lbs. (Saw),		
Weight	200 lbs. (Power Panel)		









CORE BORE INFORMATION



BIT R.P.M. CHARTS

Segmented Core Bit Recommended R.P.M. Reference Chart				
Bit Diameter	Minimum RPM	Maximum RPM	Ideal RPM	
5/16"	7639	12736	10182	
1/2"	4775	7960	6364	
5/8"	3820	6368	5091	
3/4"	3183	5307	4242	
7/8"	2728	4549	3636	
1"	2387	3980	3182	
1-1/5"	1989	3317	2652	
1-1/8"	2122	3538	2828	
1-1/4"	1910	3184	2545	
1-3/8"	1736	2895	2314	
1-1/2"	1592	2653	2121	
1-5/8"	1469	2449	1958	
1-3/4"	1364	2274	1818	
1-7/8"	1273	2123	1697	
2"	1194	1990	1591	
2-1/4"	1061	1769	1414	
2-3/8"	1005	1676	1340	
2-1/2"	955	1592	1273	
2-3/4"	868	1447	1157	
3"	796	1327	1061	
3-1/4"	735	1225	979	
3-1/2"	682	1137	909	
4"	597	995	795	
4-1/4"	562	937	749	
4-1/2"	531	884	707	
5"	477	796	636	
5-1/2"	434	724	579	
6"	398	663	530	
6-1/4"	382	637	509	
6-1/2"	367	612	490	
7"	341	569	455	
8"	298	498	398	
9"	265	442	354	
10"	239	398	318	
12"	199	332	265	
14"	171	284	227	
16"	149	249	199	
18"	133	221	177	
20"	119	199	159	
22"	109	181	145	
24"	99	166	133	
26"	92	153	122	
28"	85	142	114	
30"	80	133	106	
32"	75	124	99	
34"	70	117	94	
36"	66	111	88	
38"	63	105	84	
40"	60	100	80	
42"	57	95	76	
44"	54	90	72	
46"	52	87	69	
48"	50	83	66	

Carbide/Plate Cutter Core Bit Recommended R.P.M. Reference Chart					
Bit Diameter	Minimum RPM	Ideal RPM			
1/2"	458	900	611		
5/8"	367	900	489		
3/4"	306	900	407		
7/8"	262	900	349		
1"	229	350	306		
1-1/8"	204	350	272		
1-1/4"	183	350	244		
1-3/8"	167	350	222		
1-1/2"	153	350	204		
1-5/8"	141	350	188		
1-3/4"	131	350	175		
1-7/8"	122	350	163		
2"	115	350	153		
2-1/2"	92	350	122		
3"	76	350	102		
3-1/2"	65	350	87		
4"	57	350	76		
5"	46	350	61		
6"	38	350	51		

See page 190 for carbide core bits.

Dry Hole Saw and Dry Vacuum Core Bit Recommended R.P.M. Reference Chart					
Bit Diameter	Minimum RPM	Maximum RPM	Ideal RPM		
7/8"	2300	6000	5457		
1"	2300	6000	4775		
1-1/4"	2300	6000	3820		
1-1/2"	1600	5000	3183		
1-3/4"	1600	5000	2728		
2" 1200		5000	2387		
2-1/4 " 1200		5000	2122		
2-1/2"	1200	5000	1910		
3"	800	5000	1592		
3-1/2"	800	5000	1364		
4"	700	5000	1241		
4-1/2"	700	5000	1103		
5"	700	3500	993		
6"	600	2500	828		

See page 186 for dry core bits.











WET

Wide-spaced serrated turbo style design for less surface-to-surface contact and speed

Specification

HY3BZ-General purpose, cured concrete and hard materials, very fast coring and long life

HMPER Core Bore"				
SIZE	HY38Z Cat #			
2"	108623			
2-1/2"	108624			
3"	108626			
3-1/2"	108628			
4"	108629			
4-1/2"	108630			
5"	108631			
6"	108632			
8"	108633			
10"	108634			
12"	108635			

HYPER CORE BORE bits have a 13" core length



HYPER CORE

Ö



Specification

MOL3-General purpose, cured concrete and hard materials, very fast coring with great performance

M-Segment with

for MACH3 speed

and performance

three surface points

MACH III CORE BORE™				
SIZE	MOL3 Cat #			
2"	108130			
2-1/2"	108617			
3"	107881			
3-1/2"	108619			
4"	107932			
4-1/2"	108621			
5"	107880			
6"	107933			
7"	108517			
8"	108131			
10"	108518			
12"	108622			

MACH III CORE BORE bits have a 14" core length





Specification

WOL-General purpose, cured concrete and hard materials, fast coring

ULTRA WHITE CORE BORE™				
SIZE	WOL Cat #			
2"	108636			
2-1/2"	108637			
3"	108638			
3-1/2"	108639			
4"	108640			
4-1/2"	108641			
5"	108642			
6"	108643			
8"	108644			
10"	108645			
12"	108646			

Ultra White CORE BORE bits have a 13" core length







USE THE HYPER BIT LINE FOR THE FASTEST CORE

STAR BLUE & STANDARD GOLD

WET SEGMENTED CORE BORE





Good quality diamond and good coring value.



STAR BLUE WET CORE BORE" BITS					
SIZE	BOL Cat #				
1"	09978				
1-1/8"	09979				
1-1/4"	09981				
1-1/2"	09989				
1-3/4"	10022				
2"	10028				
2-1/4"	10029				
2-1/2"	10031				
3"	10041				
3-1/2"	10055				
4"	10057				
4-1/4"	10072				
4-1/2"	10074				
5"	10083				
6"	10084				
8"	10103				
10"	10173				
Resegmenting not available t	Resegmenting not available for Star Blue bits.				



Standard Gold

Better quality diamond and better coring value. Designed for average duty wet core drilling.

Standard Gold					
WET CORE	BORE" BITS				
SIZE	SOH Cat #				
2"	80143				
2-1/4"	80145				
2-1/2"	80146				
2-3/4"	80149				
3"	80153				
3-1/4"	80156				
3-1/2"	80157				
4"	80160				
4-1/4"	80161				
4-1/2"	80166				
4-3/4"	80177				
5"	80182				
5-1/4"	80183				
5-1/2"	80187				
6"	80193				
6-1/4"	80194				
6-1/2"	80195				
7"	80196				
8"	80197				
9"	80200				
10"	80201				
Service of the servic	MAKEN THE STATE OF				



Diamond Depth: .335" (8.5mm)







Diamond Depth:: .287" (7mm)

<u>Specification</u>

BOL- General purpose, cured concrete and hard materials

Specification

SOH- General purpose in hard materials

ORDERING INFORMATION:

All diameters are nominal. Exact tolerances upon request (Standard Gold).

Core Bit Lengths: Up to 14" Diameter Core Bits Standard Core Length = 13"

16" Diameter Core bits Standard Core Length = 19" (Standard Gold).

Hub Sizes: 1-1/4" to 1-1/2" = 5/8"-11 threaded hub. 1-5/8" and up = 1-1/4"-7 threaded hub.

Star Blue Hub Sizes: 1" to 1-1/2" = 5/8"-11 threaded hub. 2" and up = 1-1/4"-7 threaded hub. Available only with welded threaded hub. Not available with custom bonds.





For use on mounted core rigs (all sizes) and hand held motors (3" and under)



HEAVY DUTY ORANGE

WET SEGMENTED CORE BORE™

Heavy Duty Orange

Excellent footage and drilling speed. Designed for all types of wet drilling in applications with light to moderate steel. Very high quality diamond and longer coring life.





Specifications

HOL- General Purpose, Longer Life H38F-Hard aggregate with

reinforcement

H42Z-Hard materials, river rock with reinforcement

H64L- Asphalt/Block



HE	AVYD	UTY OF	RANGE	WET C	ORE BI	TS
SIZE	HOL Cat #	H38F Cat #	H42Z Cat #	H64L Cat #	HOL Wide Space Cat #	Heavy Duty Open End Cat #
1/2"	05099	45547	95431	36273		81402
5/8"	05141	39237	73994	16875		81403
3/4"	05173	45548	05171	16877		72183
7/8"	05192	45549	05191	16886		81406
1"	04812	04809	21539	04810		28042
1-1/8"	04837	45550	83034	27000		23312
1-1/4"	15509	67903	23217	25596		25944
1-3/8"	04874	45552	83029	36274		16137
1-1/2"	15525	45554	23218	28619		05208
1-5/8"	04907	45555	15038	26414		16056
1-3/4"	04910	45556	23219	28621		16138
1-7/8"	04920	45561	78415	20934		16145
2"	15479	45563	20301	04934	20102	05212
2-1/4"	04959	45564	80125	04957	28637	16148
2-1/2"	00004	37094	18343	04976	05258	05216
2-3/4"	04992	45565	90035	28623	05260	16160
3"	00005	45567	05011	05013	05263	05220
3-1/4"	05032	45568	21540	28624	28671	16189
3-1/2"	00006	45569	24060	28625	22164	05224
4"	00007	45571	21917	05060	05269	05228
4-1/4"	05079	45572	58138	05077	28178	26118
4-1/2"	00008	45574	21541	05086	22165	27383
5"	00009	45575	21542	05107	05273	05232
5-1/2"	05117	45576	21543	28626	24610	16194
6"	00010	45577	18150	05131	05278	05238
6-1/4"	05144	99115	70897	05143	28638	27782
6-1/2"	05151	45578	78417	05150	28672	66853
7"	05163	45582	18151	24977	20415	05242
8"	05183	45585	18152	05180	05281	05246
9"	05199	45586	30302	28627	20055	05249
10"	04822	45588	44174	04820	21475	05206

Diamond Depth: .237" (6mm)



ORDERING INFORMATION

All bits may be ordered with custom bonds

Note: All diameters are nominal. Exact tolerances upon request.

Core Bit Lengths: 1/2" to 7/8" Diameter Core Bits Standard Core Length= 12",

1" to 14" Diameter Core Bits Standard Core Length = 13"

16" Diameter Core bits Standard Core Length = 19"/18" Diameter Core Bits Standard Core Length = 22" 20" to 30" Diameter Core bits Standard Core Length = 23" Note: Any length available upon request.

Hub Sizes: 1/2" to 1-1/2" = 5/8"-11 threaded hub. 1-5/8" and up = 1-1/4"-7 threaded hub





For use on mounted core rigs (all sizes) and hand held motors (3" and under)

PREMIUM BLACK WET SEGMENTED CORE BORE™

€



With VERY HIGH diamond concentration, Premium Black gives maximum footage and drilling speed in all types of wet drilling applications. Good in moderate to high steel applications.

Highest quality diamond and longest coring life

PREMIUM BLACK WET CORE BITS

SIZE	POL Cat #	P38Z Cat #	P64L Cat #	POL Wide Space Cat #	Premium Open End Cat #
1/2"	05826	05824	28585		81413
5/8"	05917	05915	61808		81415
3/4"	05962	05960	28587		81416
7/8"	06004	06001	25115		06123
1"	05293	05289	19871		06022
1-1/8"	05338	05334	64328		06030
1-1/4"	05381	05376	22003		06032
1-3/8"	05404	05401	36271		17181
1-1/2"	05441	05432	05438	37393	06035
1-5/8"	05472	05469	36267		17198
1-3/4"	05483	05478	28595	06157	18673
1-7/8"	05509	05506	28596	81411	17200
2"	05529	05518	05525	18517	06041
2-1/4"	05571	05567	23771	06159	24152
2-1/2"	05607	05599	28597	06160	06051
2-3/4"	05629	18408	28598	20036	24153
3"	05661	05647	21246	06165	06062
3-1/4"	05688	05685	05686	28609	36266
3-1/2"	05709	05699	28599	06169	06077
4"	05761	05745	05753	06175	06087
4-1/4"	05791	05784	05788	28610	06095
4-1/2"	05805	05801	23173	18400	06097
5"	05843	05834	24580	06182	06105
5-1/2"	05867	05862	28600	18754	06109
6"	05892	05882	05886	06187	06114
6-1/4"	05921	05920	28601	28611	20662
6-1/2"	05927	16758	28602	17898	30213
7"	05945	05938	28603	18209	06118
8"	05984	05973	05980	18210	06121
9"	06013	06010	28604	18211	06124
10"	05306	05300	28605	18035	06025



D387

Diamond Depth: .237" (6mm)



ORDERING INFORMATION

P64L

All bits may be ordered with custom bonds

Note: All diameters are nominal. Exact tolerances upon request.

Core Bit Lengths: 1/2" to 7/8" Diameter Core Bits Standard Core Length= 12",

1" to 14" Diameter Core Bits Standard Core Length = 13"

16" Diameter Core bits Standard Core Length = 19"/18" Diameter Core Bits Standard Core Length = 22" 20" to 30" Diameter Core bits Standard Core Length = 23" Note: Any length available upon request.

Hub Sizes: 1/2" to 1-1/2" = 5/8"-11 threaded hub. 1-5/8" and up = 1-1/4"-7 threaded hub





For use on mounted core rigs (all sizes) and hand held motors (3" and under)

IT DOESN'T GET ANY BIGGER THAN CORE BORE.

Core Bore is the name you need to know when core drilling. We offer large diameter sizes up to 78" and custom-made Core Bore to fit you drilling applications.



BIG BITS WITH BIG HUB OPTIONS:

- A-Flange & C-Flange Special drill mounts
- Solid Back For heavy duty applications
- Bolt-On Allows removal of hub to access the core
- Spoke Back Light weight with inside radial water sprayer





LARGE DIAMETER


WET SEGMENTED CORE BORE™

HEAVY DUTY ORANGE LARGE DIAMETER WET CORE BITS -SOLID BACK

SIZE	SOLID BACK HOL Cat #
12"	04853
14"	04882
16"	04903
18"	04918
20"	04947
22"	04954
24"	04968

PREMIUM BLACK LARGE DIAMETER WET CORE BITS -SOLID BACK

SIZE	SOLID BACK POL Cat #
12"	05361
14"	05417
16"	05462
18"	05498
20"	05536
22"	05562
24"	05584



Large Diameter Wet Core Bits

Large diameter bits include a spoke back hub that has a built in 45 degree radial water sprayer which gets water to the tube and segments where it is needed.





HOL - General Purpose, Long Life

CONCRETE



POL - General Purpose, Longest Life

HEAVY DUTY ORANGE LARGE DIAMETER WET CORE BITS

SIZE	Spoke Hub HOL Cat #	A-Flange HOL Cat #
12"	04511	49476
14"	78448	53460
16"	57027	17465
18"	69993	70531
20"	04947	18630
22"	80331	30037
24"	03644	50659
26"	04986	25128
28"	04996	66168
30"	05023	63640
32"	05031	48507
34"	28641	51537
36"	25778	02976
38"	28642	32975
40"	28643	50502
42"	28644	33239
44"	41642	33247
46"	41643	
48"	28055	33331
54"	41915	27188
56"	35251	33335
60"	25046	33348

PREMIUM BLACK LARGE DIAMETER WET CORE BITS

SIZE	Spoke Hub POL Cat #	A-Flange POL Cat #
12"	09546	49697
14"	70661	78290
16"	56788	09758
18"	56858	93221
20"	55440	48928
22"	59823	28954
24"	56846	29081
26"	05622	29170
28"	05632	34032
30"	05671	32980
32"	05682	35952
34"	05696	
36"	05721	31623
38"	05740	34031
40"	24832	72867
42"	05781	33569
44"	05797	
46"	32564	
48"	05817	33585
54"	33621	33789
56"	05871	33809
60"	20691	34012

Spoke-back standard on bits 25" diameter and up.

Bolt-On Pricing is the Same as Spoke Back Pricing

Larger sizes are available. Please consult the factory for more information.

ORDERING INFORMATION:

All bits may be ordered with custom bonds.

Examples of Standard Core Length: 20" to 29" = 23", 30" to 72" = 35"

Note: Lengths longer than the standard are quoted on an individual basis. **Hub Sizes:** •1-1/4"-7 threaded hub unless otherwise specified. •1-7/8"-7 hub with 1-1/4"-7 adapter included on bits above 36".

Note: All diameters are nominal. Exact tolerances upon request.



PROFESSIONAL WET CORE BORE



Super Premium Red

Higher quality diamond with wide spaced segments for fast drilling in moderate steel. Tall segment for Longer life.



Pro Blue

Very high quality diamond with wide spaced segments for very fast drilling in heavy steel and medium aggregate.

.237" (6mm)



Supreme Silver

Highest high quality diamond concentration meant for smaller holes in very heavy steel and medium aggregate.



Diamond Depth: .237" (6mm)

Diamond Depth: .350" (8.89mm)

Specification
SPOL- General concrete

Super Premium			
SIZE	SPOL Cat #	Open End Cat #	
1"	06629	17818	
1-1/4"	21128	17855	
1-1/2"	06639	17865	
1-3/4"	06640	34429	
2"	06641	70389	
2-1/2"	06647	06686	
3"	06650	30001	
3-1/2"	06652	22377	
4"	06654	70466	
4-1/2"	06660	75339	
5"	06662	73215	
6"	06665	06700	
7"	06670	17923	
8"	06672	77867	
9"	06676	17947	
10"	06631	17950	

Our Super Premium Red & Pro Blue

bits are designed with the professional driller in mind. They have a wider spaced segment design which delivers more power to the cutting surface. This additional power results in faster coring and higher productivity.

Specification

TOL- General concrete

Pro Blue

SIZE	TOL Cat #	Open End Cat #	
1"	06712	06920	
1-1/8"	06725	32200	
1-1/4"	06732	17687	
1-3/8"	20645	32201	
1-1/2"	06740	06923	
1-5/8"	06743	32207	
1-3/4"	19920	17701	
1-7/8"	81099	32233	
2"	06753	06927	
2-1/2"	06760	06930	
3"	06771	06935	
3-1/2"	06781	06939	
4"	06791	06941	
4-1/2"	06802	06943	
5"	06808	06946	
5-1/2"	06812	48095	
6"	06819	06949	
6-1/2"	06824	48101	
7"	06826	36275	
8"	06833	06951	
9"	06841	36276	
10"	06715	06921	

Specification

UOF- General concrete with heavy steel

U□L- General concrete, fast drilling

Supreme Silver			
SIZE	UOF Cat #	UOL Cat #	
1/2"	07190	07191	
5/8"	07200	13698	
3/4"	07208	07209	
7/8"	07220	07222	
1"	07097	07098	
1-1/8"	07110	07113	
1-1/4"	07120	07121	
1-3/8"	07127	14699	
1-1/2"	07137	07138	
1-5/8"	07146	20718	
1-3/4"	07154	07155	
1-7/8"	07160	24067	
2"	07165	07166	







SPOL TOL UOL



ORDERING INFORMATION:

All bits may be ordered with custom bonds

Note: All diameters are nominal. Exact tolerances upon request.

Core Bit Lengths:

1/2" to 7/8" Diameter Core Bits Standard Core Length= 12" Up to 14" Diameter Core Bits Standard Core Length = 13"

Hub Sizes: 1/2" to 1-1/2" = 5/8"-11 threaded hub. 1-5/8" and up = 1-1/4"-7 threaded hub.





For use on mounted core rigs (all sizes) and hand held motors (3" and under)

PRECAST WET CORE BORE





Heavy Duty Orange

Made to resist segment failure from coring through pre-tensioned wire in precast materials Very high quality diamond and long coring life.

Diamond Depth:



Premium Black

Made to resist segment failure from coring through pre-tensioned wire in precast materials. Very high quality diamond and longest coring life.



Diamond Depth: .237" (6mm)

.237" (6mm)

Specification
HOL- General Concrete, Fast Coring, Long Life

Heavy Duty Orange Precast			
SIZE	HOL Cat #		
1"	41210		
1-1/4"	41211		
1-1/2"	41212		
1-3/4"	41213		
2"	41214		
2-1/2"	41215		
3"	41216		
3-1/2"	41217		
4"	41218		
4-1/2"	41219		
5"	41220		
6"	41221		
7"	41222		
8"	41223		
9"	41224		
10"	41225		

Specification

POL-General Concrete, Fast Coring, Longest Life

Premium Black Precast			
SIZE POL Cat #			
1"	41226		
1-1/4"	41227		
1-1/2"	41228		
1-3/4"	41229		
2"	41230		
2-1/2"	41231		
3"	41232		
3-1/2"	41233		
4"	41234		
4-1/2"	41235		
5"	41236		
6"	41237		
7"	41238		
8"	41239		
9"	41240		
10"	41241		



HOL POL PRECAST



ORDERING INFORMATION:

All bits may be ordered with custom bonds

Note: All diameters are nominal. Exact tolerances upon request. **Core Bit Lengths:** Standard Core Length = 13" Note: Any length available upon request.

Hub Sizes: 1" to 1-1/2" = 5/8"-11 threaded hub. 1-5/8" and up = 1-1/4"-7 threaded hub.





For use on mounted core rigs (all sizes) and hand held motors (3" and under)



TURBO WET CORE BORE



Star Blue

Good quality diamond and good coring value. Serrated segment for faster coring

Serrated segment design for less surface to surface contact



Heavy Duty Orange

Very high quality diamond and longer coring life in medium aggregate concrete with moderate steel.

Serrated segment for faster coring.

Diamond Depth:

Diamond Depth: .335" (8.5mm) Segment Top View

Specification

TBOWL- General purpose, moderate steel

Star Blue Turbo CORE BORE SIZE TBOWL Cat # 2" 32955 2-1/2" 10186 3" 10237 3-1/2" 10238 4" 10266 4-1/2" 10272 5" 10290 6" 10305 8" 10307 10" 10323 12" 23251





TBOWL THOWL

ORDERING INFORMATION:

All bits may be ordered with custom bonds (Star Blue excluded)

Core Bit Lengths: Standard Core Length = 13" Note: Any length available upon request.

Hub Sizes: 1" to 1-1/2" = 5/8"-11 threaded hub. 1-5/8" and up = 1-1/4"-7 threaded hub.



Specification

Turbo CORE BORE			
SIZE	THOWL Cat #		
1-1/2"	06885		
1-3/4"	35416		
2"	06888		
2-1/4"	06889		
2-1/2"	06893		
3"	06896		
3-1/4"	93299		
3-1/2"	06898		
4"	06901		
4-1/4"	06902		
4-1/2"	06905		
5"	06907		
5-1/2"	23868		
6"	06910		
7"	06911		
8"	06914		
9"	06915		
10"	06880		
12"	06882		
14"	65118		
16"	38999		

THOWL- General purpose Moderate steel,





For use on mounted core rigs (all sizes) and hand held motors (3" and under)

SPECIALTY TUREO WET CORE BORE





Premium Black

Highest quality diamond and longest coring life in medium aggregate concrete with heavy steel. Serrated segment for faster coring.

Diamond Depth: .237"

Super Premium Red

High diamond concentration and quality for very long life. Fastest coring bit in various applications with heavy steel. Extra high diamond depth of .400" for the longest life and fastest core.



Diamond Depth: .400"



Segment Top View

Specification

TPOWL- General purpose with high steel, Longest Life

Premium Black Turbo CORE BORE

Turbo CO	RE BORE
SIZE	TPOWL Cat #
1-1/2"	06957
1-5/8"	76893
1-3/4"	30049
2"	06960
2-1/4"	06962
2-1/2"	06965
3"	06969
3-1/4"	44618
3-1/2"	06972
4"	06974
4-1/4"	06977
4-1/2"	06978
5"	06979
5-1/2"	06981
6"	06982
7"	06987
8"	06988
9"	16094
10"	06955
12"	06956
14"	23026
16"	24481

Specifications

TSPOL - General purpose moderate steel, TSP38L - Hard aggregate, fast coring TSP64L - Asphalt & block, fast coring

TSPSAG3+- Fast coring in hard aggregate with moderate steel

Super Premium Red Turbo CORE BORE				
SIZE	TSPOL Cat #	TSP38L Cat #	TSP64L Cat #	TSPSAG3+ Cat #
2"	84820	45632	17056	77374
2-1/2"	84821	45633	84853	77774
3"	84822	54702	17057	77219
3-1/2"	84823	58156	20939	77882
4"	84824	45634	84856	77474
4-1/2"	84825	45635	20942	78400
5"	84826	45639	17058	77475
6"	84827	58158	17063	77476
7"	84828	45642	20943	78082
8"	84829	45644	20945	77372
9"	84830	45647	20946	78171
10"	84831	45650	84863	77373



REINFORCED CONCRETE





SPOL TPOWL ^T

TSP38L TSPSAG3+ TPOWL TSP64L





PRODUCTS

Specification: EMD- Reinforced Concrete, Fast Coring, Long Life









CMD

Profile view of Commander segment

CORE BORE™ BITS		
SIZE	CMD Cat #	
2"	71197	
2-3/4"	74895	
3"	71198	
3-1/2"	77367	
4"	74513	
4-1/4"	77370	
4-1/2"	77371	
5"	44547	
6"	71200	
7"	78567	
8"	77274	
9"	83384	
10"	77275	
11"	81866	
12"	71202	
14"	98953	
16"	71203	
*22"	01584	
*24"	68967	

COMMANDER



For use on mounted core rigs

THINWALL HAND-HELD WET CORE BORE





SPECIFICATIONS:
POL & UOL - General purpose, fast coring

P38Z & U38Z - Fast coring in harder materials and stone









Measurements of Thinwall

Core Bits			
Outside Diameter	Inside Diameter	Outside Diameter	Inside Diameter
1/2"	.330	1-3/8"	1.200
5/8"	.450	1-1/2"	1.325
3/4"	.575	1-5/8"	1.450
7/8"	.700	1-3/4"	1.680
1"	.830	1-7/8"	1.700
1-1/8"	.950	2"	1.830
1-1/4"	1.080	2-1/2"	1.980

Premium Black and Supreme Silver Thinwall

		Id CORE	ECRE	
SIZE	POL Cat #	P38Z Cat #	UOL Cat #	U38Z Cat #
1/2"	07061	23273	28516	37777
5/8"	07065	23322	28517	52665
3/4"	07071	76132	28518	37778
7/8"	07077	07075	28519	65957
1"	07017	20184	28520	62004
1-1/8"	07021	23260	28521	37967
1-1/4"	07027	19053	28522	83931
1-3/8"	07031	20676	28523	77558
1-1/2"	07037	07035	28524	77618
1-5/8"	18222	36879	28525	95572
1-3/4"	07043	21854	28526	38966
1-7/8"	18223	27647	28527	84008
2"	07050	07047	28528	36236
2-1/4"	17941	07052	28529	45652
2-3/8"	18224	27139	28530	45653
2-1/2"	17948	18927	28531	58376
2-3/4"	18225	26817	28532	45654
3"	17827	22307	28533	45491
3-1/2"	17911	25670	57545	55332
4"	17828	22628	28534	79364
5"	17829	39599	28535	45658
6"	17940	27145	28536	45660

ORDERING INFORMATION:

All thinwall bits have a 5/8"-11 hub. Other specifications available upon request. 1/2" to 7/8" = 12" core length-1" and up = 13" core length.

Note: All diameters are nominal. Exact tolerances upon request.



Premium Eleck Stone Bits

- · Wet core bits for drilling marble and granite
- Core length of 2" allows an accurate hole in hard materials
- · Crown style for a smooth finish
- · 3" overall length





SPECIFICATION: P28Z-Very hard materials, fast coring

for Natural Stone		
SIZE P28Z Cat #		
1"	28026	
1-1/4"	28027	
1-3/8"	28029	
1-1/2"	28033	
1-3/4"	28034	

Straight Shank Adapters & Water Swivels

water Swivers			
Description	Cat #		
3/8" SS to 5/8-11 adapter	01913		
1/2" SS to 5/8-11 adapter	01899		
5/8" SS to 5/8-11 adapter	01936		
75HD water swivel 5/8-11 to 5/8- 11 with water valve	01885		

F

Premium Black Tile Bits

- Wet thinwall core bits with 2" core length for fast, smooth coring in tile
- The soft bond handles very hard tile and the thin crown segment creates a nice finished core
- 3" overall length.





SPECIFICATION:
P28Z-Very hard materials, fast coring

Premium Black Tile Bits		
SIZE P28Z Cat #		
1"	73910	
1-1/4"	73913	
1-3/8"	73914	
1-1/2" 73924		
1-3/4"	73915	
2"	73923	

DRY HOLE SAW CORE BORE



Heavy Duty Orange

Dry Hole SawVery high quality diamond and longer coring life



■ Block and soft brick-not for use on concrete

Star Blue Dry Hole Saw Bits			
SIZE	DB Cat #	Max RPM/ Min RPM	Drill/Grinder Min. Amps
1"	35385	6000/2300	6
1-1/4"	35390	6000/2300	6
1-1/2"	35392	5000/1600	7
2"	35406	5000/1200	7
2-1/2"	35440	5000/1200	7
3"	35444	5000/800	7
3-1/2"	35452	5000/800	10
4"	35453	5000/700	10
4-1/2"	35459	5000/700	10
5"	35478	3500/700	10
6"	35479	2500/600	10

on concrete

Heavy Du	ty Orange	Dry Hole	Saw Bits
SIZE	DH Cat #	Max RPM/ Min RPM	Drill/Grinder Min. Amps
7/8"	04771	6000/2300	6
1"	04706	6000/2300	6
1-1/4"	04711	6000/2300	6
1-1/2"	04717	5000/1600	7
1-3/4"	04720	5000/1600	7
2"	00011	5000/1200	7
2-1/4"	04727	5000/1200	7
2-1/2"	00012	5000/1200	7
3"	00013	5000/800	7
3-1/2"	00014	5000/800	10
4"	04745	5000/700	10
4-1/2"	04751	5000/700	10
5"	04756	3500/700	10
6"	04764	2500/600	10

Adapters for Dry Bits

□B-Block and soft brick-not for use

Description	Part #	Cat #
5/8"-11 pilot adapter (for right angle grinders)	4400035	01902
1/2" straight shank pilot adapter (for 1/2" drill chuck)	4400034	01901
1/2" carbide pilot drill with A-Taper	1400029	00033

Dry bits are used with intermittent cuts allowing air to cool the bit NO WATER NEEDED

Ordering Information (Dry Hole Saws):

- · Not all types of brick and block can be drilled-please consult factory
- 9" drilling depth (11" on Star Blue) and 5/8"-11 hub
- Jacobs Chuck adapter available for hand held rotary drills 5/8"-11 thread to straight shank
- Custom bonds, extra core length and re-segmenting is not available on dry core bits



For use on right angle grinders and hand held core drills



Premium Black Dry Hole Saw

Highest quality diamond and longest life Wider segments with heavier barrel wall to withstand harder brick and prevent segment loss.

• 9" drilling depth with 5/8-11 threaded hub

Heavy Duty Orange Dry Vacuum Bit

Very high quality diamond and Longer

DRY VACUUM BIT NOTES:

- Do not use in applications with steel heavier than wire mesh
- 9" drilling depth with 1.250"-12 threaded hub
- NOT designed for hard aggregate concrete



For use with a standard shop vacuum to remove dust and debris. Great for use in clean areas where dust control is required.



■ - Brick/block and non-reinforced concrete

DVH - Brick/block and non-reinforced concrete

Premium Black Dry Hole Saw Bits			
SIZE	DP Cat #	Max RPM/ Min RPM	Drill/Grinder Min. Amps
7/8"	46326	6000/2300	6
1"	46327	6000/2300	6
1-1/4"	46328	6000/2300	6
1-1/2"	46329	5000/1600	7
1-3/4"	46330	5000/1600	7
2"	46331	5000/1200	7
2-1/4"	46332	5000/1200	7
2-1/2"	46333	5000/1200	7
3"	46334	5000/800	7
3-1/2"	46335	5000/800	10
4"	46336	5000/700	10
4-1/2"	46337	5000/700	10
5"	46338	3500/700	10
6"	46339	2500/600	10

Ordering Information (Dry Hole Saws):

- Not all types of brick and block can be drilled-please consult factory
- 9" drilling depth (11" on Star Blue) and 5/8"-11 hub
- Jacobs Chuck adapter available for hand held rotary drills 5/8"-11 thread to straight shank
- Custom bonds, extra core length and re-segmenting is not available on dry core bits



For use on right angle grinders and hand held core drills

Heavy Duty Orange Dry Vacuum Bits			
SIZE	DVH Cat #	Max RPM/ Min RPM	
1-1/2"	04775	5000/1600	
1-3/4"	04777	5000/1600	
2"	04780	5000/1200	
2-1/4"	04782	5000/1200	
2-1/2"	04785	5000/1200	
3"	04789	5000/800	
3-1/2"	04793	5000/800	
4"	04796	5000/700	
4-1/2"	04799	5000/700	
5"	04802	3500/700	
6"	04805	2500/600	

*Dry Vacuum Bits Must Use a Core Vac Dry Vacuum Air Swivel

Core Vac Dry Vacuum Air Swivel

Description	Part #	Cat #
5/8"-11 to 1.250"-12 Core Vac Dry Vacuum Air Swivel Assembly	4400125	01950
Swivel Extension-(12")	4400126	01951
1-1/4"-7F 1.250-12M Threaded Adapter for Use on the WEKA DK13 Motor	4400320	75698

Dry bits are used with intermittent cuts allowing air to cool the bit **NO WATER NEEDED**



HOLE SAW & VACUUM BIts

DVH bits are part of the CORE VAC brand

10"

79382

THREADED WET CORE BORE



Threaded Core Bits

- Allows increased range of drilling depth with continuous tubing threaded bits and barrels
- Additional barrel lengths can be added as you drill deeper, similar to oil drilling
- Standard threaded bits have a core length of 12" and extra barrel lengths are available in 12", 24", 36" and 48"
- Segment width of threaded bits are .187" for bits 1-1/2" to 6"
- · Threaded bits 6-1/2" to 10" have .250" segment width

Specifications:

HOL- General purpose, cured concrete with moderate steel

POL- General purpose, concrete with heavy steel, long life

P38F- Very hard aggregate with heavy steel

UOF- High diamond concentration for concrete with extremely high steel content









HOL

POL PEEF **WOF**

HOL POL P38F UOF

PESF UOF

	TH	READED B	ITS	
SIZE	HD Orange HOL Cat #	Premium Black POL Cat #	Premium Black P38F Cat #	Supreme Silver UOF Cat #
1"		06128	21024	31418
1-1/4"		19156	50088	28326
1-1/2"	44577	06134	45661	29515
2"	18073	06138	45662	07233
2-1/4"	36614	06140	45665	71468
2-1/2"	05252	06143	45667	18259
2-3/4"	05253	23245	26447	18260
3"	28541	06144	68191	18261
3-1/4"		28546	89512	
3-1/2"	17967	06146	26484	18297
4"	05254	06148	97678	83914
4-1/4"		87522	45672	
5"	45315	06150	45673	
5-1/2"		28548	45675	
6"	28543	06151	45680	Custom bond
6-1/4"		50412	45681	specifications
6-1/2"	69850	28550	45684	available
7"	52319	06152	45685	upon request.
8"	28186	06154	45686	
9"	50411	28551	92032	

06129



For use on mounted core rigs

53921

THREADED Caps & Barrels

THREADED CAPS & BARRELS



THREADED CAPS AND BARRELS ARE USED
FOR DEEP HOLE DRILLING.

THE BARRELS CAN BE PIECED TOGETHER AS YOU DRILL DEEPER.



Threaded caps and barrels are not included in the free freight policy. Freight charges apply.

6"

6-1/4"

6-1/2"

7"

8"

9"

10'



PECIALTY CORE BORE" BITS



Wood Bits

- · Metal teeth rip through wood with ease
- · 10" core length
- · Air slots in barrel help keep the bit cool
- Can be used on thin-gauge and 1/4" plate metal

Carbide Rebar & Plate Cutters

- · Designed to cut through rebar or plate steel after a diamond core bit has drilled through the concrete
- Carbide inserts are brazed into the core barrel These specialized bits must be used with water to keep the bit cool while drilling in steel
- 10" Standard core length











CARBIDE REBAR AND PLATE CUTTER CORE BITS

SIZE	Rebar Cutter Cat #	# of Inserts	Plate Cutter Cat #	# of Inserts
1/2"	07253	4	59195	4
5/8"	07256	4	49514	6
3/4"	07257	4	49515	6
7/8"	07259	6	52040	8
1"	07236	6	07260	8
1-1/8"	07237	6	07262	10
1-1/4"	07238	6	07263	10
1-3/8"	07239	8	61081	12
1-1/2"	07240	8	07265	12
1-5/8"	58064	8	62663	14
1-3/4"	07241	8	07266	14
1-7/8"	07242	10	55705	16
2"	07243	10	07267	16
2-1/2"	07248	12	07269	20
3"	07249	14	07270	26
3-1/2"	07250	16	62429	30
4"	07252	20	07273	34
5"	07254	25	43399	42
6"	07255	30	07275	50
8"	53358	40	07276	70
9"	66108	45	43401	76
10"	45009	50	43402	84

CORE	BITS for W	/OOD
Diameter	Part #	Cat #
2"	BDH2000DW	108079
2-1/2"	BDH2500DW	108080
3"	BDH3000DW	108082
3-1/2"	BDH3500DW	03913
4"	BDH4000DW	107821
5"	BDH5000DW	107116
6"	BDH6000DW	107117
8"	BDH8000DW	108354
10"	BDH10000DW	108355

Includes 1-1/4"-7 threaded hubs

DHW -Aggressive Teeth for Wood and Metal

For use on wood materials only. DO NOT USE ON CONCRETE

or other rock based materials. Warranty is void if used on materials other than wood.





Step Bits

- Designed to make a recessed 'step' for drain covers, and other special uses
- Custom sizes available.
- Available in all quality grades and in straight segment or turbo style
- Custom made to your individual application.

Other Sizes and Specifications are Available *Star Blue excluded

Retractable Carbide Bits

- · Used in Offices and buildings where duct work is present
- Carbide bit drills through thin duct work and diamond bit drills through concrete



Cat # 01928

Cat # 105587

Cat # 00032

Cat # 01929



Cat # 01673



HEAVY DUTY ORANGE HOL-General Purpose, Longer Life Size/Description Part # Cat # Specification 2" X 3" X 4" X 6" CORE BH200030004000 01079 HOL BH20004000 23045 2" X 4" HOL 08724 2" X 4" X 6" BH200040006000 HOL 2"X 4" X 6-1/2" BH200040006500 27384 HOL 2-1/4" X 2-1/2" BH22502500 04961 HOL X 8-1/4" CORE 2-9/32" X 2-9/16" BH22812562 52075 HOL 3" X 3 1/2" CORE BH30003500 78611 HOL 5" X 3" X 1" BH531STP 50768 HOL

PREMIUM BLACK POL-General Purpose, Longest Life

Size/Description	Part #	Cat #	Specification
1" X 3" X 5" X 24" DRILL DEPTH	BP100030005000	26784	POL
1 3/4" X 2"	BP17502000	25738	POL
2" X 3 1/2"	BP20003500	76194	POL
2" X 5"	BP20005000	97639	POL
2-1/4" X 2-1/2"	BP22502500	05572	POL
6.850" X 6-1/8"	BP68506125	29113	POL
1 1/4" X 3/4"	BP7501250	18535	POL

RETRACTABLE C	ARBIDE BIT
Description	Cat #
2-1/4" x 2-1/2" Retractable carbide	01673

INDIVIDUAL

Description	Cat #
2-1/4" Carbide Hole Saw with Threaded Cap	00032
2-1/2" x 8" HOL Threaded Bit*	105587
Threaded Bit Adapter	01929
2-1/2" Left/Right Threaded Cap	01928
2-3/4" Left/Right Threaded Cap	01930

*Specify threads for retractable carbide bit when ordering.









SPECIALTY CORE BORE" BITS

'Pancake' Bits

- For use in applications where a hole is needed with a recessed top
- Great for airport runway light canisters
- · Most custom sizes and bonds available
- Custom made to your individual application

Other sizes and specifications available call for more information



HEAVY DUTY ORANGE

HOL-Ger	neral Purpose, Long	jer Lite	
Size/Description	Part #	Cat #	Specification
2.880" X 4.620"	BH28804620	84474	HOL
3.000" X 4.500"	BH30004500	99174	HOL
3-1/2" X 3"	BH35003000	13780	HOL
3.541" X 1.500" PILOT	BH35411500	51323	HOL
3.840" X 1/2" CARBIDE PILOT	BH384012	61773	HOL
3.840" X 1.500" PILOT	BH38401500	53314	HOL
4" X 2" WITH 2" CENTER PILOT 3" LONG	BH40002000P	01093	HOL
4.120" X 4.750"	BH41204750	84475	HOL
4.515" X 2.980" X 3/8" CARBIDE PILOT	BH451538	66964	HOL
4.700" X 4.090" X 3/8" CARBIDE PILOT	BH470038	66967	HOL
5" X 3"	BH50003000P	16889	HOL
5 1/2" WITH 1 1/4"-7 HUB	BH5500P	04467	HOL
6 1/2" X 4 3/4" HEAVY DUTY	BH65004750	20352	HOL



HOL



For use on mounted core rigs

PREMIUM BLACK POL-General Purpose, Longest Life

BH70006500P

71695

HOL

Size/Description	Part #	Cat #	Specification
1-3/4" X 1-1/8"	BP17501125	04358	POL
2-1/2" PANCAKE X 2" PILOT	BP25002000	23843	POL
2 1/2" PANCAKE X 7/8" PILOT	BP250078	96775	POL
1-3/4" X 2-7/8"	BP28751750	04356	POL
3-1/8" X 7/8" PILOT	BP312578	88235	POL
4-1/2" X 2-3/4" WITH PILOT	BP45002750P	25612	POL
5" X 3-1/2"	BP50003500	99106	POL

7" X 6-1/2"

EXPANSION ADAPTERS & INFO



Expansion Adapters

- · Expansion adapters are used on open-end core bits instead of welded hubs
- · Made up of two threaded plates with expansion ring
- The three pieces are placed in the core barrel and tightened on the drill rig spindle
- · The expansion ring expands, and tightens against the core barrel-keeping the bit secure



Order your core bit with extra core length for a deeper hole.

Expansion Adapters For Use with Open-Ended Bits

SIZE	Part #	Cat #
1"	4010476	01638
1-1/8"	4010477	01639
1-1/4"	4010478	54239
1-3/8"	4010479	01640
1-1/2"	4010480	01641
1-5/8"	4010481	01642
1-3/4"	4010482	01643
1-7/8"	4010483	71254
2"	4010484	01644
2-1/4"	4010485	01645
2-1/2"	4010486	01646
2-3/4"	4010487	01647
3"	4010488	01648
3-1/4"	4010489	01649
3-1/2"	4010490	01651
4"	4010491	01652
4-1/4"	4010492	01654
4-1/2"	4010493	01655
5"	4010494	01656
5-1/2"	4010495	01658
6"	4010496	01659
6-1/4"	4010497	01660
6-1/2"	4010498	01661
7"	4010499	01662
8"	4010500	01663
9"	4010501	01664
10"	4010502	01665



The expansion ring expands, and tightens against the core barrel, keeping the bit secure.





CORE BIT SEGMENTS ONLY

.145" THROUGH .187" THICKNESS

Heavy Duty Orange Specification: HOL

Premium Black Specification: POL

Supreme Silver Specification: UOL

1 ء	145" Thic	kness	.1	45" Thic	kness	اک	145" Thic	kness
Bit Size	Part #	Cat #	Bit Size	Part #	Cat #	Bit Size	Part #	Cat #
2"	BSGH14502	25040	2"	BSGP14502	25562	2"	BSGU14502	27796
2-1/2"	BSGH14525	25041	2-1/2"	BSGP14525	25579	2-1/2"	BSGU14525	27834
3"	BSGH14503	25044	3"	BSGP14503	22013	3"	BSGU14503	27851
4"	BSGH14504	25062	4"	BSGP14504	25581	4"	BSGU14504	27852
5"	BSGH14505	25076	5"	BSGP14505	22030	5"	BSGU14505	27855
6"	BSGH14506	23257	6"	BSGP14506	26141	6"	BSGU14506	27856
9ء	165" Thic	kness	.1	65" Thic	kness	-9	165" Thic	kness
2"	BSGH16502	25321	2"	BSGP16502	25595	2"	BSGU16502	27882
2-1/2"	BSGH16525	30209	2-1/2"	BSGP16525	25597	2-1/2"	BSGU16525	27894
3"	BSGH16503	25323	3"	BSGP16503	23003	3"	BSGU16503	27899
4"	BSGH16504	22796	4"	BSGP16504	23812	4"	BSGU16504	27902
5"	BSGH16505	25332	5"	BSGP16505	25599	5"	BSGU16505	27905
6"	BSGH16506	25334	6"	BSGP16506	25605	6"	BSGU16506	27911
8"	BSGH16508	25335	8"	BSGP16508	15289	8"	BSGU16508	27923
9" +	BSGH16512	25336	9" +	BSGP16512	25614	9" +	BSGU16512	30476
9ء	187" Thic	kness	.1	87" Thic	kness	-9		kness
2"	BSGH18702	25341	2"	BSGP18702	25637	2"	BSGU18702	27938
2-1/2"	BSGH18725	25367	2-1/2"	BSGP18725	30306	2-1/2"	BSGU18725	27942
3"	BSGH18703	25369	3"	BSGP18703	25730	3"	BSGU18703	27955
4"	BSGH18704	25378	4"	BSGP18704	25974	4"	BSGU18704	27958
5"	BSGH18705	25386	5"	BSGP18705	25979	5"	BSGU18705	27967
6"	BSGH18706	25390	6"	BSGP18706	17281	6"	BSGU18706	27978
8"	BSGH18708	23582	8"	BSGP18708	23804	8"	BSGU18708	27993
9" +	BSGH18712	20612	9" +	BSGP18712	15318	9" +	BSGU18712	28231

	Bit Crowns-1/2" through 1-3/4"								
Diameter	HD Orange HOL Part #	HD Orange HOL Cat #	Premium Black POL Part #	Premium Black POL Cat #	Supreme Silver UOF Part #	Supreme Silver UOF Cat #			
1/2"	BSGCH500	28555	BSGCP500	28566	BSGCU500	06357			
5/8"	BSGCH625	28556	BSGCP625	21790	BSGCU625	06359			
3/4"	BSGCH750	28557	BSGCP750	20261	BSGCU750	06361			
7/8"	BSGCH875	28558	BSGCP875	18340	BSGCU875	06362			
1"	BSGCH1000	28559	BSGCP1000	06309	BSGCU1000	06346			
1-1/8"	BSGCH1125	28560	BSGCP1125	06312	BSGCU1125	06348			
1-1/4"	BSGCH1250	28561	BSGCP1250	06315	BSGCU1250	06349			
1-3/8"	BSGCH1375	28562	BSGCP1375	06319	BSGCU1375	06350			
1-1/2"	BSGCH1500	28563	BSGCP1500	06325	BSGCU1500	06351			
1-5/8"	BSGCH1625	28564	BSGCP1625	18889	BSGCU1625	06352			
1-3/4"	BSGCH1750	51159	BSGCP1750	06332	BSGCU1750	06355			



Bit Crowns are continuous and have water ways to allow water and slurry to escape.

CORE BIT Segments

CORE BIT SEGMENTS ONLY

.145" THROUGH .187" THICKNESS



Heavy Duty Orange Turbo Specification: THOWL Premium Black Turbo Specification: TPOWL

Super Premium
Red Plus Turbo
Specification:
TSPSAG3+

Pro Blue Specification: TOL

.145	" Thick	mess	.145	5" Thick	kness .145" Thickness .145" Thi		.145" Thickness		5" Thic	kness	
Bit Size	Part #	Cat #	Bit Size	Part #	Cat #	Bit Size	Part #	Cat #	Bit Size	Part #	Cat #
2"	BSGTH14502	62824	2"	BSGTP14502	51262	2"	BSGTSP+14502	17126	2"	BSGT14502	26864
2-1/2"	BSGTH14525	62825	2-1/2"	BSGTP14525	62933	2-1/2"	BSGTSP+14525	28433	2-1/2"	BSGT14525	26894
3"	BSGTH14503	62829	3"	BSGTP14503	46585	3"	BSGTSP+14503	19853	3"	BSGT14503	26906
4"	BSGTH14504	62830	4"	BSGTP14504	62945	4"	BSGTSP+14504	15872	4"	BSGT14504	26909
5"	BSGTH14505	62836	5"	BSGTP14505	62951	5"	BSGTSP+14505	28449	5"	BSGT14505	26913
6"	BSGTH14506	62844	6"	BSGTP14506	51153	6"	BSGTSP+14506	28451	6"	BSGT14506	26923
.165	" Thick	iness	.165	5" Thick	iness	.16	5" Thick	ness	.165	" Thic	kness
2"	BSGTH16502	62845	2"	BSGTP16502	62953	2"	BSGTSP+16502	28453	2"	BSGT16502	26925
2-1/2"	BSGTH16525	62849	2-1/2"	BSGTP16525	62954	2-1/2"	BSGTSP+16525	19389	2-1/2"	BSGT16525	26948
3"	BSGTH16503	62850	3"	BSGTP16503	62955	3"	BSGTSP+16503	18872	3"	BSGT16503	26954
4"	BSGTH16504	62857	4"	BSGTP16504	62956	4"	BSGTSP+16504	15965	4"	BSGT16504	26955
5"	BSGTH16505	62858	5"	BSGTP16505	62960	5"	BSGTSP+16505	18910	5"	BSGT16505	26960
6"	BSGTH16506	62862	6"	BSGTP16506	62961	6"	BSGTSP+16506	14797	6"	BSGT16506	26967
8"	BSGTH16508	64692	8"	BSGTP16508	51387	8"	BSGTSP+16508	14836	8"	BSGT16508	27246
9" +	BSGTH16512	62870	9" +	BSGTP16512	62963	9" +	BSGTSP+16512	28475	9" +	BSGT16512	30460
.187	" Thick	iness	.187	7" Thick	iness	.18	7" Thickr	ness	.187	" Thic	kness
2"	BSGTH18702	62871	2"	BSGTP18702	62966	2"	BSGTSP+18702	28487	2"	BSGT18702	26969
2-1/2"	BSGTH18725	62928	2-1/2"	BSGTP18725	62970	2-1/2"	BSGTSP+18725	28492	2-1/2"	BSGT18725	26971
3"	BSGTH18703	63297	3"	BSGTP18703	62973	3"	BSGTSP+18703	28507	3"	BSGT18703	26978
4"	BSGTH18704	62874	4"	BSGTP18704	62974	4"	BSGTSP+18704	09681	4"	BSGT18704	26979
5"	BSGTH18705	62876	5"	BSGTP18705	62975	5"	BSGTSP+18705	18636	5"	BSGT18705	27014
6"	BSGTH18706	62929	6"	BSGTP18706	62976	6"	BSGTSP+18706	28737	6"	BSGT18706	27017
8"	BSGTH18708	62877	8"	BSGTP18708	62977	8"	BSGTSP+18708	08511	8"	BSGT18708	27018
9" +	BSGTH18712	26490	9" +	BSGTP18712	62978	9" +	BSGTSP+18712	14844	9" +	BSGT18712	27020

See page 194 for number of segments used on core bits.



Loose segments include silver braze. **Extra braze available**

	Part #	Cat #
1	2200002	00166

Standard Segment Sizes

Bit Diameter	Segment Widths
1-7/8" thru 6"	.145"
7" and 8"	.165"
9" thru 16"	.187"
18" thru 24"	.220"
Above 24"	.250"



CORE BIT SEGMENTS ONLY

.200" THROUGH .250" THICKNESS

Heavy Duty Orange Specification: HOL

Premium Black Specification: POL Supreme Silver Specification: UOL

.200" Thickness			.200" Thickness			.200" Thickness		
Bit Size	Part #	Cat #	Bit Size	Part #	Cat #	Bit Size	Part #	Cat #
2"	BSGH20002	25395	2"	BSGP20002	25985	2"	BSGU20002	27995
2-1/2"	BSGH20025	25398	2-1/2"	BSGP20025	25994	2-1/2"	BSGU20025	28001
3"	BSGH20003	25399	3"	BSGP20003	26010	3"	BSGU20003	28008
4"	BSGH20004	25401	4"	BSGP20004	26011	4"	BSGU20004	28012
5"	BSGH20005	25402	5"	BSGP20005	26012	5"	BSGU20005	28018
6"	BSGH20006	25403	6"	BSGP20006	26013	6"	BSGU20006	28031
8"	BSGH20008	25425	8"	BSGP20008	26014	8"	BSGU20008	28084
9" +	BSGH20012	25430	9" +	BSGP20012	26015	9" +	BSGU20012	28090
.6	20" Thic	kness	.2	220" Thic	kness	. E	220" Thic	kness
2"	BSGH22002	25433	2"	BSGP22002	26016	2"	BSGU22002	28283
2-1/2"	BSGH22025	25434	2-1/2"	BSGP22025	26021	2-1/2"	BSGU22025	28293
3"	BSGH22003	25449	3"	BSGP22003	26022	3"	BSGU22003	28092
4"	BSGH22004	25472	4"	BSGP22004	26024	4"	BSGU22004	28118
5"	BSGH22005	25455	5"	BSGP22005	26025	5"	BSGU22005	28134
6"	BSGH22006	25475	6"	BSGP22006	26028	6"	BSGU22006	28144
8"	BSGH22008	25486	8"	BSGP22008	26045	8"	BSGU22008	28150
9" +	BSGH22012	23596	9" +	BSGP22012	21049	9" +	BSGU22012	28165
.6	250" Thic	kness	.2	250" Thic	kness	æ	250" Thic	kness
2"	BSGH25002	30257	2"	BSGP25002	26054	2"	BSGU25002	28167
2-1/2"	BSGH25025	30268	2-1/2"	BSGP25025	26075	2-1/2"	BSGU25025	28180
3"	BSGH25003	30271	3"	BSGP25003	26081	3"	BSGU25003	28191
4"	BSGH25004	30287	4"	BSGP25004	26082	4"	BSGU25004	28197
5"	BSGH25005	30299	5"	BSGP25005	26086	5"	BSGU25005	28202
6"	BSGH25006	25499	6"	BSGP25006	26095	6"	BSGU25006	28205
8"	BSGH25008	25502	8"	BSGP25008	26104	8"	BSGU25008	28212
9" +	BSGH25012	23106	9" +	BSGP25012	21401	9" +	BSGU25012	28213

See page 194 for number of segments used on core bits.



Loose segments include silver braze. **Extra braze available**

Part #	Cat #
2200002	00166

Standard Segment Sizes						
Bit Diameter	Segment Widths					
1-7/8" thru 6"	.145"					
7" and 8"	.165"					
9" thru 16"	.187"					
18" thru 24"	.220"					
Above 24"	.250"					

CORE BIT Segments

CORE BIT SEGMENTS ONLY

.200" THROUGH .250" THICKNESS



Heavy Duty Orange Turbo Specification: HOL Premium Black Turbo Specification: POL

Super Premium Red Plus Turbo Specification: TSPSAG3+

Pro Blue Specification: TOL

.200" Thickness .200" Thickness .2				.20	O" Thick	ness	.20	O" Thi	ckness		
Bit Size	Part #	Cat #	Bit Size	Part #	Cat #	Bit Size	Part #	Cat #	Bit Size	Part #	Cat #
2"	BSGTH20002	63201	2"	BSGTP20002	63252	2"	BSGTSP+20002	28509	2"	BSGT20002	27041
2-1/2"	BSGTH20025	63202	2-1/2"	BSGTP20025	63254	2-1/2"	BSGTSP+20025	28539	2-1/2"	BSGT20025	27055
3"	BSGTH20003	63203	3"	BSGTP20003	63255	3"	BSGTSP+20003	28589	3"	BSGT20003	27066
4"	BSGTH20004	63205	4"	BSGTP20004	63259	4"	BSGTSP+20004	28592	4"	BSGT20004	27075
5"	BSGTH20005	63207	5"	BSGTP20005	63260	5"	BSGTSP+20005	23837	5"	BSGT20005	27080
6"	BSGTH20006	63208	6"	BSGTP20006	63261	6"	BSGTSP+20006	28615	6"	BSGT20006	27099
8"	BSGTH20008	63210	8"	BSGTP20008	63264	8"	BSGTSP+20008	08543	8"	BSGT20008	27100
9"+	BSGTH20012	62979	9"+	BSGTP20012	62982	9" +	BSGTSP+20012	13568	9" +	BSGT20012	27113
<u>.e</u>	20" Thi	ckness	.22	20" Thi	ckness	.22	O" Thick	ness	.25	O" Thi	ckness
2"	BSGTH22002	63211	2"	BSGTP22002	63268	2"	BSGTSP+22002	28629	2"	BSGT22002	27134
2-1/2"	BSGTH22025	63215	2-1/2"	BSGTP22025	63269	2-1/2"	BSGTSP+22025	28630	2-1/2"	BSGT22025	27146
3"	BSGTH22003	63219	3"	BSGTP22003	63271	3"	BSGTSP+22003	28651	3"	BSGT22003	27151
4"	BSGTH22004	63221	4"	BSGTP22004	63274	4"	BSGTSP+22004	28656	4"	BSGT22004	27154
5"	BSGTH22005	63222	5"	BSGTP22005	63275	5"	BSGTSP+22005	28665	5"	BSGT22005	27163
6"	BSGTH22006	63229	6"	BSGTP22006	63277	6"	BSGTSP+22006	28676	6"	BSGT22006	27165
8"	BSGTH22008	63230	8"	BSGTP22008	63279	8"	BSGTSP+22008	21810	8"	BSGT22008	27166
9" +	BSGTH22012	62981	9" +	BSGTP22012	62983	9" +	BSGTSP+22012	08572	9" +	BSGT22012	27167
.2	50º Thi	ckness	.25	O" Thi	ckness	.25	O" Thick	ness	.25	O" Thi	ckness
2"	BSGTH25002	63232	2"	BSGTP25002	63280	2"	BSGTSP+25002	28689	2"	BSGT25002	27168
2-1/2"	BSGTH25025	63233	2-1/2"	BSGTP25025	63282	2-1/2"	BSGTSP+25025	28704	2-1/2"	BSGT25025	27169
3"	BSGTH25003	63234	3"	BSGTP25003	63283	3"	BSGTSP+25003	28707	3"	BSGT25003	27170
4"	BSGTH25004	63239	4"	BSGTP25004	63286	4"	BSGTSP+25004	28718	4"	BSGT25004	27172
5"	BSGTH25005	63243	5"	BSGTP25005	63287	5"	BSGTSP+25005	28720	5"	BSGT25005	27184
6"	BSGTH25006	63244	6"	BSGTP25006	63288	6"	BSGTSP+25006	17594	6"	BSGT25006	27224
8"	BSGTH25008	63245	8"	BSGTP25008	63290	8"	BSGTSP+25008	28729	8"	BSGT25008	27236
9" +	BSGTH25012	52493	9" +	BSGTP25012	42873	9" +	BSGTSP+25012	08589	9" +	BSGT25012	27244

See page 194 for number of segments used on core bits.



Loose segments include silver braze. **Extra braze available**

Part #	Cat #
2200002	00166

Standard Segment Sizes

Bit Diameter	Segment Widths
1-7/8" thru 6"	.145"
7" and 8"	.165"
9" thru 16"	.187"
18" thru 24"	.220"
Above 24"	.250"



CORE BIT INFORMATION

			_			ore Bits	
Segment Bit Size	Core Bit Diameter	Standard Gold	Heavy Duty Orange	Black	Pro Blue	Super Premium Red	Turbo
1" bit	1		4	4	4		
	1 1/8		4	4	-		
1-1/4" bit	1 1/4		5	5	5		
	1 3/8		5	5	4		
4 4/011 1-14	1 1/2		4	4	4		
1-1/2" bit	1 5/8 1 3/4		5 5	5 5	5		
	1 7/8		4	4	5		
2" bit	2	5	5	5	4	4	5
	2 1/8	5	5	5	4	4	5
2-1/2" bit	2 1/4	5	5	5	5	5	5
Z-1/Z DIL	2 1/4	6	6	6	5	5	6
	2 3/4	6	6	6	6	6	6
	3	7	7	7	6	6	7
3" bit	3 1/4	8	8	8	8	6	8
	3 1/4	8	8	8	7	7	8
	3 3/4	8	8	8	7	7	8
4" bit	4	10	10	10	8	8	10
- Dit	4 1/4	10	10	10	8	8	10
	4 1/2	11	11	11	9	9	11
5" bit	4 3/4	11	11	11	9	9	11
o an	5	12	12	12	10	10	12
	5 1/2	13	13	13	11	11	13
	6	14	14	14	12	12	14
6" bit	6 1/4	14	14	14	12	12	14
	6 1/2	15	15	15	13	13	15
011.14	7	14	16	16	14	15	16
8" bit	8	16	16	16	16	16	18
	9	18	18	18	18	18	
	10	20	20	20	20		20
	12	24	24	24	24		24
	14	28	28	28	28		
	16	30	30	30	30		
	18		30	30	30		
	20		32	32			
	24		38	38			
	26		40	40			
12" bit	28		44	44			
IZ UIL	30		47	47			
	32		49	49			
	34		52	52			
	36		56	56			
	38		60	60			
	40		62	62			
	42		65	65			
	44		68	68			
	46		71	71			
	48		74	74			

*Call Customer Service Experts for Additional Services at 800-321-5336

Large Diameter Core Bit Measurements

Bit Outside Diameter	Tube Overall Length	Core Depth
8-1/2"	14"	13"
9"	14"	13"
10"	14"	13"
11"	14"	13"
12"	14"	13"
13"	14"	13"
14"	14"	13"
15"	19"	17"-18"
16"	20"	18"-19"
18"	22"	20"-21"
20"	25"	23"-24"
21"	25"	23"-24"
22"	25"	23"-24"
23"	25"	23"-24"
24"	25"	23"-24"
25"	25"	23"-24"
26"	25"	23"-24"
27"	25"	23"-24"
28"	25"	23"-24"
29"	25"	23"-24"
30" and up	37"	34"-35"

Large Diameter Number of Segments

SIZE	# of Segments
12"	24
14"	28
16"	30
18"	30
20"	32
22"	34
24"	38
26"	40
28"	44
30"	47
32"	49
34"	52
36"	56
38"	60
40"	62
42"	65
44"	68
46"	71
48"	74
54"	84
56"	89
60"	94

CORE BIT RE-SEGMENTING





We Will Re-Tip Your Worn Bit at a 20% Savings to You

Re-segmented Core Bits

Save money by recycling your used core bits. The bigger the bit, the more you save

Send us your used core bits, ours or a competitors, and we will cut off the end and put new segments on it for a bit that is as good as new.

Core bits can be re-segmented with most quality grades and bonds provided the tube is suitable.

Resegmenting not available for Star Blue Core Bits or Dry Bits



THOUSANDS OF WAYS TO BUILD YOUR CUSTOM RIG

CHOOSE YOUR STAND

- Anchor Base
- Vacuum Base
- Combination Anchor/Vac Base

CHOOSE YOUR MOTOR

Consider:

- Maximum Bit Capacity
- Amps/Volts
- RPM Speed
- Mounted or Hand-Held
- Wet or Dry Drilling

CHOOSE ACCESSORIES

- CORE BORE™ Adapters
- CORE BORE™ Extensions
- Control Panel Analog or Digital
- Base Vacuums
- Cords and Cord Adapters
- Custom Size Columns (Masts)
- Motor Mounts
- Water or Vacuum Swivels
- Spacer Blocks
- Roller Carriages
- Dust Control
- And More...



RIG MODELS:

- M1AA Portable Rig
- **M 1** Complete Expert Rig
- M2 Large Expert Rig
- M3 Portable Stair Rig
- M4 Portable Multipurpose Rig
- M5 Heavy Duty Quick Disconnect Rig
- M5-PRO Pro Quick Disconnect Rig
- M6 Large Hydraulic Rig

MOTORS:

- **CB733** Up to 16", 20 amp (120V or 230V) LED amp meter
- **CB744** Up to 18", 25 amp (115V) LED amp meter
- **WEKA**

DK22 - Up to 16", 23 amp (110V), 11 amp (230V) - 3-speed

DK32 - Up to 18", 30 amp (110V), 15 amp (230V) - 3 speed

DK38 - Up to 18", 16 amp (230V) - 18 speed DK42 - Up to 20", 8.2 amp (460V- 3PH), 14.2 amp (230V 3PH)

DK52 - Up to 24", 9 amp (460V-3PH), 18 amp (230V-3PH)

SR75 - Up to 26", 14 amp (480V-3PH) 9-speed

HAND-HELD

CB515 - up to 3" - 2-speed, 115 volt, wet drilling

DK12 - up to 3" - 3-speed, 14 amp (115V) - wet drilling

DK13 - up to 3" - 3-speed, 14 amp (115V) - dry or wet drilling

DK16 - up to 3" - 3-speed, 19 amp (110V) - wet drilling

CORE RIG & DRILLING Basics

Example: M1 COMBO with CB744

MOTOR MOUNT

Connects the motor to the carriage.

Spacer block can be added for increased diameter capacity.

MOTOR

Drives the core bit. Typically electric or hydraulic.

MOTOR SPEED DIAL

Allows you to change the RPM of the motor for different sized core bits.

SPINDLE

Threaded motor end that connects to the core bit. Typically 1.250"-7 or 5/8"-11 thread size.

CORE BORE BIT

Diamond segmented cylinder for coring holes.

WATER CONNECTION

Water hose and valve for connecting to a water source allowing wet drilling.

CEILING JACK

A screw-fed rod that allows you to secure the rig from above using a wooden block or similar item.

MAST WITH GEAR RACK

Steel column with gear rack that allows the carriage to run up and down. Can be various lengths for deeper holes.

CARRIAGE

Rides along the mast and uses pinion gears to move up or down, allowing you to feed retract the core bit.

FEED HANDLE

Used to turn the pinion gears and moves the carriage up or down the mast.

VACUUM PRESSURE GAUGE

Monitors the vacuum pressure so you know when the rig is secure and safe to use.

VACUUM MOTOR

Secures a vacuum base to a flat surface.

VACUUM SLOT or ANCHOR HOLE

Connection where the vacuum connects to the vacuum base that includes a slot cap gasket.

VACUUM BASE

Allows anchoring using a vacuum. Can be used with anchors.

LEVELING SCREW (4)

Used for making the rig level. Not used for anchoring the rig.

VACUUM GASKETS

Replaceable gaskets that creates a seal for vacuuming the core rig to a flat surface. Replace when damaged.

CORE BORE VACUUM GASKETS

Rig Model #	Part #	Cat #
M-1	4645020	02083
M-2	4641024	02022
M-3	4643040	02064
M-4	4600016	01995
M-5 / M-5PRO	4600132	47445



M1AA-15 Core Rig


CONVENIENCE AND DURABILITY IN A LICHT WEIGHT CORE RIC







All-purpose vacuum base add-on option with vacuum pump allows you to use the M1AA anchor rig as a vacuum rig

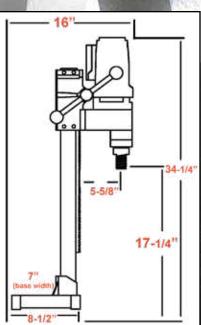

Location to drill anchor hole = 9-1/2" measured from the center of the motor spindle to the center of the anchor/ vacuum slot on base

FEATURES

On Bit Capacity

· Weighs only 35 lbs.

Electric

- Single speed-800 RPM
- Spring loaded slide handle for easy coring

Bit not included

- Convenient carrying handle on carriage
- · Light weight and portable
- Uses standard power outlets
- Small compact unit for precise coring
- No separate amp meter box
- Includes trap ring that keeps water contained
- Lower cost alternative to larger rigs

M1AA PORTABLE DRILL RIG						
Model #	Rig Type	Power	Motor RPM	Part #	Cat #	Product Weight (lbs.)
M1AA-15	Anchor rig	15amp	800	4220050	85986	53
M1AA-12	Anchor rig	12 amp, 220V	800	4220049	24024	53
M1AA-15	Complete rig with add-on vacuum base and vacuum pump	15 amp	800	4220058	87078	80
M1AA-12	Complete rig with add-on vacuum base and vacuum pump	12 amp, 220V	800	4220048	42687	80

M1AA RIG OPTIONS

Description	Part #	Cat #
Water Trap Ring	2704100	95186
36mm wrench	2704103	96047
48mm wrench	2704104	95631
All purpose vacuum base add-on only	4247075	01818
Vacuum pump only	4244078	01771



M-1 COMPLETE CORE RIG

GREAT FOR THE GENERAL CONTRACTOR AND IS THE #1 SELLING RIG IN THE U.S.A.

> M-1 Complete Combination Rig with CB744 motor (control panel not needed)

M-1 Complete Anchor Rig with CB733 motor


10" Standard Bit Capacity 14" with Spacers 14" Standard Bit Capacity CB733 & CB744

FEATURES:

- 2-1/2" square column (mast) with black oxidized finish
- · 6" wheels for easy mobility
- Dual switch/outlet control panel with amp meter (except for CB733 and CB744 models with LED amp meter)
- Vacuum pump for quick mounting to flat surface without drilling an anchor hole (included with combination rig)
- 4 leveling screws on the base
- Slide handle allows for drilling in tight areas
- · Combination base changes from vacuum to anchor base
- Ceiling jack helps keep the rig in place as a backup for anchoring or vacuuming the base down (used with a brace piece-2 x 4 or other material)







M-1 Angle Anchor Stand Only

Part #	Cat #
4246075	113932

M-1 Standard Anchor Stand Only

Stanc	l Only
Part #	Cat #
4246055	01806
4243055 for Weka, CB733 & CB744	77909

M-1 Combination Stands Only

Part #	Cat #
4245065 Combo Standard	01801
4247060 Combo Angle	01809
4245092 for Weka, CB733 & CB744	07810

M-1 COMPLETE CORE RIG




M-1 COM	IBINATION		RIGS WIT		JUM P	UMP	INCLUDES:
Model #	Motor	Power	Motor RPM	Combo Rig Part #	Cat #	Product Weight (lbs.)	
M1C-20-CB733-V	Core Bore CB733*	20 amp	550/1000/1600	4245112	85327	136	Combo Stand, Motor, Vacuum Pump,
M1C-23-DK22-V	Weka DK22	23 amp	550/1120/1680	4245053	47173	127	Control Panel
M1C-23-DK22S-V	Weka DK22S	23 amp	800/1640/2430	4245046	50138	127	
	MBINATION Control panel not i						
M1C-20-CB733WO	Core Bore CB733*	20 amp	550/1000/1600	4245115	39317	108	Combo Stand, Motor,
M1C-25-CB744WO	Core Bore CB744*	25 amp	385/530/975/1340	4245104	81050	110	Vacuum Pump
M-1 COMB	INATION D	RILL R	IGS WITHO	OUT VA	CUUM	PUMP	
M1C-23-DK22	Weka DK22	23 amp	550/1120/1680	4245077	71962	117	Combo Stand, Motor,
M1C-23-DK22S	Weka DK22S	23 amp	800/1640/2430	4245078	72583	117	Control Panel
M-1 COMB			IGS WITHOROL PANE		CUUM	PUMP	
M1C-20-CB733WO	Core Bore CB733*	20 amp	550/1000/1600	4245113	39159	80	Combo Stand Mater
M1C25-CB744WO	Core Bore CB744*	25 amp	385/530/975/1340	4245111	81053	85	Combo Stand, Motor
	M-1 A	NCHO	R DRILL F	RIGS			
M1A-23-DK22	Weka DK22	23 amp	550/1120/1680	4245008	52339	95	Anchor Stand, Motor,
M1A-23-DK22S	Weka DK22S	23 amp	800/1640/2430	4245011	66795	95	Control Panel
_	HOR DRILL panel not needed						
M1A-20-CB733WO	Core Bore CB733*	20 amp	550/1000/1600	4245114	39195	98	Anahan Ctanal Matar
M1A-25-CB744	Core Bore CB744*	25 amp	385/530/975/1340	4245103	81054	98	Anchor Stand, Motor

*CB733 and CB744 motors do not require a control panel for operation. These motors include LED amp meter and on/off switch.


Over a Thousand Different Ways to Build Your Custom Rig!

Looking for a Quick Disconnect on Your M-1 Rig? Use Part # 4699961, Cat # 46830

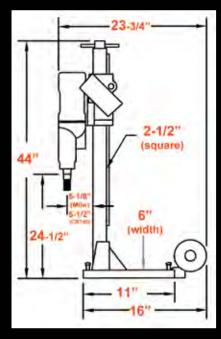

M-1 ANCHOR

Location to drill anchor hole = 12" measured from the center of the motor spindle to the center of the anchor slot on base

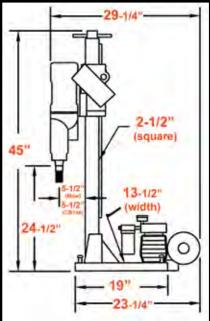

COMBINATION

Location to drill anchor hole = 12-1/2" measured from the center of the motor spindle to the center of the anchor/vacuum slot on base



M-2 HEAVY DUTY CORE RIG

The #1 pro Ric in the U.S.A.



Stand Only	M-2 Com	bination
Staria Office	Stand	Only

Part #	Cat #
4243053 for Weka, CB733 & CB744	77218

M-2 / Combi Stand	
Part #	Cat #
4241092	113927

10" Standard Bit Capacity 36" with Spacers 14" Standard Bit Capacity **CB733 & CB744**

FEATURES:

- · Heavy duty rig for larger jobs and the professional driller
- · Dual switch/outlet control panel with amp meter (except for CB733 and CB744 models with LED amp meter)
- 2-7/8" precision made, chrome plated square column (mast)
- · Vacuum pump for quick mounting to flat surface without drilling an anchor hole (Included with combination rig)
- Combo base changes over from vacuum to anchor base
- · 6" wheels for easy mobility
- 4 Leveling Screws on base
- Larger mast to withstand high torque and large diameter bits
- The 4-spoke handle allows the operator to easily apply feed
- Optional roller carriage allows for more precise drilling
- Auto-feed option available

Upgrade your slide carriage to a heavy duty roller carriage, which lasts longer and gives precision movement. Order with new rigs or for existing rigs.

Anchor

Part # Cat # 4243054		
	Part #	Cat #
CB733 & 77045 CB744	for Weka, CB733 &	77045

M-2 Large **Base Anchor** Stand Only

Part # Cat # 4241093 113928 M-2 Angle Anchor Stand Only

Part #	Cat #
4241094	113929

M-2 Roller Carriage Upgrade - With New Rig

Part #	Cat #
4241000	01684

M-2 Roller Carriage - Existing Rigs

Part #	Cat #
4277556	105642

M-2 HEAVY DUTY CORE RIG




		4 - 4					
M-2 COM	BINATION [ORILL	RIGS WITH	VACL	JUM F	PUMP	INCLUDES:
Model #	Motor Make/Model	Power	Motor RPM	Part #	Cat #	Product Weight (lbs.)	
M2C-23-DK22-V	Weka DK22	23 amp	550/1120/1680	4241068	47426	137	Vacuum Pump, Control Panel
M2C-23-DK22S-V	Weka DK22S	23 amp	800/1640/2430	4241069	50007	137	Fallel
	BINATION						
PANEL (Co	ontrol Panel not ne	eded - Inc	ludes LED meter	and on/off	switch o	n motor)	
M2C-20-CB733WO	Core Bore CB733*	20 amp	550/1000/1600	4245118	39330	118	Combo Stand, Motor,
M2C-25-CB744WO	Core Bore CB744*	25 amp	385/530/975/1340	4245107	81057	122	Vacuum Pump
			ION DRILL				
	PAT CONTROPORTED PATE PROPERTY CONTROL P						
M2C-20-CB733	Core Bore CB733*	20 amp	550/1000/1600	4245116	39318	110	Combo Stand, Motor
M2C-25-CB744	Core Bore CB744*	25 amp	385/530/975/1340	4245105	81061	115	Combo Stand, Motor
M-2 COMBI	NATION DR	ILL RI	GS WITHO	UT VA	CUUN	1 PUMP	
M2C-23-DK22	Weka DK22	23 amp	550/1120/1680	4241088	73291	120	Combo Stand, Motor,
M2C-23-DK22S	Weka DK22S	23 amp	800/1640/2430	4241089	75275	120	Control Panel
C	OMPLETE I	VI-2 AI	VCHOR DR	ILL RIC	35		
M2A-23-DK22	Weka DK22	23 amp	550/1120/1680	4241008	01691	114	Anchor Stand, Motor,
M2A-23-DK22S	Weka DK22S	23 amp	800/1640/2430	4241011	52247	114	Control Panel
	HOR DRILL						
(Control	panel not needed -		LED meter and or	l/off switch	on moto	r)	
M2C-20-CB733WO	Core Bore CB733*	20 amp	550/1000/1600	4245117	39324	110	
M2C-25-CB744WO	Core Bore CB744*	25 amp	385/530/975/1340	4245106	81062	115	Anchor Stand, Motor
M2C-23-DK22WO	Weka DK22	23 amp	550/1120/1680	4246063	111343	110	

*CB733 and CB744 motors do not require a control panel for operation. These motors include LED amp meter and on/off switch.


Over a Thousand Different Ways to Build Your Custom Rig!

Looking for a Quick Disconnect on Your M-2 Rig? Use Part # 4699961, Cat # 46830

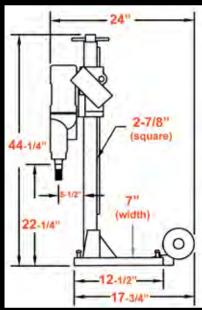


M-2 ANCHOR

Location to drill anchor hole = 12" measured from the center of the motor spindle to the center of the anchor slot on base

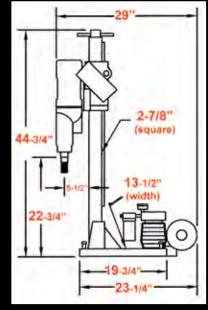

M-2 COMBO

Location to drill anchor hole = 12" measured from the center of the motor spindle to the center of the anchor/vacuum slot on base

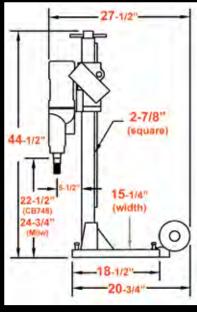

M-2 LARGE ANCHOR

Location to drill anchor hole = 12-1/2" measured from the center of the motor spindle to the center of the anchor slot on base

ALLOWS YOU TO REMOVE THE MOTOR TO USE FOR HAND-HELD APPLICATIONS



M-3 Combo Stand Only-WEKA Motors Part # Cat # 4247547 49709 Complete Combo Rig with Weka Dk12 - Part # 4247405

M-3 Anchor
Stand OnlyWEKA Motors
Part # Cat #

4247541 48110

6" Standard Bit Capacity 3" Hand-Held

FEATURES:

- · Single switch outlet control panel with amp meter
- 1-1/2" square column (mast) with black oxidized finish
- Swivel base and mast can turn 360° for easy drilling on stairs
- · 4 leveling screws on the base
- · Wheel kit on anchor models
- · Light weight and economical
- Slide handle permits drilling in tight areas
- · Compact size for hard-to-reach drilling areas
- Ceiling jack helps keep the rig in place as a backup for anchoring or vacuuming the base down (used with a brace piece-2x4 or other material)
- · Weka models allow the motor to be unmounted and used hand-held



Vacuum Seal Retention Keeps Vacuum Gasket Held Into the Base Longer for a Durable Seal


M-3 LIGHT WEIGHT STAIR RIG



M-3 COMBINATION DRILL RIGS WITH VACUUM						INCLUDES:	
MODEL#	MOTOR	RPM	Part #	Cat #	Product Weight (lbs.)	Combo Stand, Motor,	
M3C-14-DK12-V	14 Amp Weka DK12	970/2330/4400	4247405	01819	84	Control Panel, Vacuum Pump	
M3C-14-DK13-V	14 Amp Weka DK13	970/2330/4400	4247406	87271	84	vacaum i amp	
M-3 COMBINATION DRILL RIGS WITHOUT VACUUM							
M3C-14-DK12	14 Amp Weka DK12	970/2330/4400	4247437	76919	63	Combo Stand, Motor, Control Panel	
M-3 ANCHOR DRILL RIGS							
M3A-14-DK12	14 Amp Weka DK12	970/2330/4400	4247001	01811	68	Anchor Stand, Motor, Control Panel	


Over a Thousand Different Ways to Build Your Custom Rig!



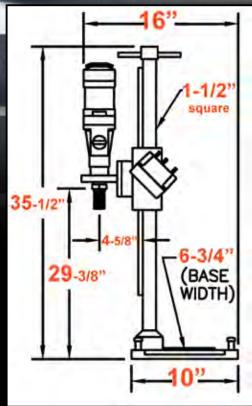

M-3 ANCHOR

Location to drill anchor hole = 12" measured from the center of the motor spindle to the center of the anchor slot on base

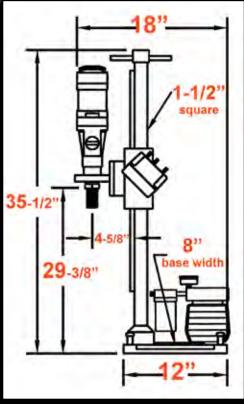

м-з сомво

Location to drill anchor hole = 11-1/2" measured from the center of the motor spindle to the center of the anchor/vacuum slot on base

M-4 MULTI-PURPOSE CORE RIG

GREAT VERSATILITY IN A LICHT-WEICHT RIC





/I-4 Anchor Stand Only for Weka

IAIOCOLO				
Part #	Cat #			
4240024	47074			

M-4 Combination Stand Only for			
Weka Motors			
Part #	Cat #		

weka i	viocors
Part #	Cat #
4240022	47885

M-4 Combination Angle Stand Only for Weka Motor			
Part # Cat #			
4240020	01680		

Motor	m	for W
Cat #	ı	Part #
01680	Ш	424002

Swivel Combo

for Weka Motor			
Part #	Cat #		
4240028	47778		

6" Standard Bit Capacity 3" Hand-Held

FEATURES:

- Great for the general contractor (basic drilling) or plumber (hand-held drilling), electrical or mechanical contractor
- Reversible slide handle (for use on left or right side)
- High strength, hard anodized 1-5/8" x 2" aluminum column
- Top carrying handle
- · Quick release motor mount
- Carriage lock
- Leveling bolts on all model bases
- · Hand-held option
- · Light weight and portable
- Combo bases have angle braces for drilling up to 45°
- 4 adjustable slide bearings provide superior carriage rigidity
- · Quick change over from vacuum to anchor base




Vacuum seal retention keeps vacuum gasket held into the base longer for a durable seal

M-4 MULTI-PURPOSE CORE RIG



M-4 COME	INATION DRILL I	RIGS WITH	I VACL	IUM P	UMP	INCLUDES:
Model #	Motor	RPM	Part #	Cat #	Product Weight (lbs.)	
M4C-14-DK12-V	14 Amp Weka DK12	970/2330/4400	4240001	00020	74	Combo Stand, Motor,
M4C-14-DK13-V	14 Amp Weka DK13	970/2330/4400	4240044	51033	74	Vacuum Pump
M4C-19-DK16-V	19 Amp Weka DK16 (110V)	900/1900/3900	4240054	98393	74	
M4C-7-DK12-V	7 Amp Weka DK12 (230V)	970/2330/4400	4240009	60114	74	
M-4 COME	INATION DRILL RIC	3S WITHOU	T VACL	JUM PI	JMP	
M4C-14-DK12	14 Amp Weka DK12	970/2330/4400	4240046	66489	61	
M4C-14-DK13	14 Amp Weka DK13	970/2330/4400	4240047	66975	61	Combo Stand, Motor
M4C-19-DK16	19 Amp Weka DK16 (110V)	900/1900/3900	4240057	08871	67	Combo Stand, Motor
M4C-7-DK12	7 Amp Weka Dk12 (230V)	970/2330/4400	4240053	10169	66	
	M-4 ANCHO	R DRILL F	RIGS			
M4A-14-DK12	14 Amp Weka DK12	970/2330/4400	4240010	46871	61	
M4A-14-DK13	14 Amp Weka DK13 Dry	970/2330/4400	4240045	61221	61	Anchor Stand, Motor
M4A-19-DK16	19 Amp Weka DK16 (110V)	900/1900/3900	4240055	98683	70	Anchor Stand, Motor
M4A-7-DK12	7 Amp Weka DK12 (230V)	970/2330/4400	4240016	87938	68	
M-4 SWIVEL DRILL RIGS WITH VACUUM PUMP						
M4S-14-DK12	14 Amp Weka DK12	580/1400/2900	4240030	46983	76	
M4S-19-DK16	19 Amp Weka DK16 (110V)	900/1900/3900	4240056	98684	76	Combo Swivel Stand, Motor, Vacuum Pump
M4S-7-DK12	7 Amp Weka DK12 (230V)	970/2330/44 00	4240036	76985	80	, r

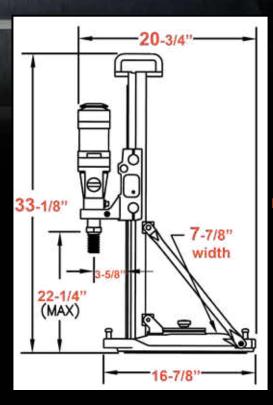



motor out and use hand-held

(Weka DK12 and DK13 only)

м-4 сомво

Location to drill anchor hole = 9-3/4" (combo rig), 9-1/4" (anchor rig)

Measured from the center of the motor spindle to the center of the anchor/vacuum slot on base (*Complete Anchor Rig does not have a vacuum slot on base)

THE LIGHTEST **BIG RIG ON** THE MARKET!





Angle Stand Only				
Mast Size	Part #	Cat		
40" Mast	4220030	468		

Mast Size	Part #	Cat #
40" Mast	4220030	46894
50" Mast	4220032	51407
60" Mast	4220031	60833

M-5 Anchor Stand Only				
Mast Size	Part #	Cat #		
40" Mast	4220080	46987		
50" Mast	4220082	59150		
60" Mast	4220081	58402		


12" Standard Bit Capacity 20" with Spacers 16" Standard Bit Capacity **CB733 & CB744**

FEATURES:

- Quick release motor mount
- · 4-spoke sliding handle (can be used on right or left)
- · Positive carriage lock

M-5 Q.D.

- 2-1/2" x 3" extruded aluminum light weight column (mast) that is hard anodized to prevent wear
- · Quick release vacuum button
- Top carrying handle (ceiling jack available)
- Large bit capacity in a smaller rig system
- · Allows for mounting hydraulic motors
- Angle stand to drill up to 45°
- Double column support for increased stability
- Easily adjustable slide bearings





The M-5 has a quick disconnect motor mount that makes it easy to remove the motor.

*Spacer blocks and Quick Disconnect Spacers are found in the drilling accessories section. Special plate needed for hydraulic motor

M-5 Q.D. Mount

Part #	Cat #
4600130	48123




M-5 HEAVY DUTY QUICK DISCONNECT CORE RIG




M-5 COME	BINATION DRIL	L RIGS W	/ITH V	ACUL	JM PUMP	INCLUDES:	
Model #	Motor	Motor RPM	Part #	Cat #	Product Weight (lbs.)		
M5C-23-DK22-V	23 Amp Weka DK22	550/1120/1680	4220001	47175	125		
M5C-23-DK22S-V	23 Amp Weka DK22S	800/1640/2430	4220002	49581	125	Combo Stand, Motor, Control Panel, Vacuum Pump	
M5C-20-CB744-V	25 Amp Core Bore CB744*	385/530/975/1340	4245110	81063	130		
M5C-11-DK22-V	11 Amp Weka DK22 (230V)	550/1120/1680	4220010	62089	114		
M5C-11-DK22S-V	11 Amp Weka DK22S (230V)	800/1640/2430	4220011	49825	114		
M-5 COMB	INATION DRILL	RIGS WITH	OUT C	ONTR	OL PANEL		
M5C-20-CB733WO	Core Bore CB733*	550/1000/1600	4245121	39420	108	Combo Stand, Motor,	
M5C-25-CB744WO	Core Bore CB744*	385/530/975/1340	4245110	81063	110	Vacuum Pump	
M-5 COMBINATION DRILL RIGS WITHOUT VACUUM PUMP							
M5C-23-DK22	23 Amp Weka DK22	550/1120/1680	4220017	70410	105	Combo Stand, Motor, Control Panel	
M5C-23-DK22S	23 Amp Weka DK22S	800/1640/2430	4220018	70564	105		
M5C-20-CB744	25 Amp Core Bore CB744*	385/530/975/1340	4245108	81064	105		
M5C-11-DK22	11 Amp Weka DK22 (230V)	550/1120/1680	4220025	10187	98		
M5C-11-DK22S	11 Amp Weka DK22S (230V)	800/1640/2430	4220026	84682	98		
M-5 ANCHOR DRILL RIGS							
M5A-23-DK22	23 Amp Weka DK22	550/1120/1680	4220051	47688	87		
M5A-23-DK22S	23 Amp Weka DK22S	800/1640/2430	4220052	66630	87	Anchor Stand, Motor, Control Panel	
M5A-20-CB744	25 Amp Core Bore CB744*	385/530/975/1340	4245109	81065	91		
M5A-11-DK22	11 Amp Weka DK22 (230V)	550/1120/1680	4220060	54577	86	Control Fanel	
M5A-11-DK22S	11 Amp Weka Dk22S (230V)	800/1640/2430	4220061	70390	86		
M-5 ANCHOR DRILL RIGS WITHOUT CONTROL PANEL							
M5C-20-CB733WO	Core Bore CB733*	550/1000/1600	4245120	39390	90	Anchor Stand, Motor	
M5C-25-CB744WO	Core Bore CB744*	385/530/975/1340	4245109	81065	96		

^{*}CB733 and CB744 motors do not require a control panel for operation. These motors include LED amp meter and on/off switch.

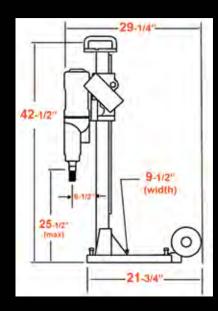

ANCHOR

Location to drill anchor hole = 13-1/2" measured from the center of the motor spindle to the center of the anchor slot on base

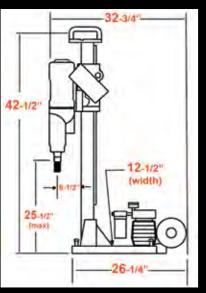

M-5 COMBO

Location to drill anchor hole = 13" measured from the center of the motor spindle to the center of the anchor/ vacuum slot on base

M-5 PRO G.D. Rig

M-5 PRO H. D. QUICK DISCONNECT CORE RIG



(Control panel not needed with CB733 or CB744 motors)


11" Standard Bit Capacity 16" Standard Bit Capacity **CB733 & CB744**

FEATURES:

- · Quick disconnect motor mount that makes it easy to remove the motor
- · 4-spoke handle (can be used on right or left) on combo rig
- · Positive carriage lock and friction lock
- · Extruded aluminum light weight column (mast) that has a reinforced track with steel roller guide and rollers
- Dual control panel/amp meter included with combination rigs
- Quick release vacuum button
- · Convenient carrying handle
- · Level bubble on column
- · 2 gear ratios for easy carriage feed
- Angle stand to drill up to 45°



Non-integrated motor mount with adapter for use with standard mounting motors



M-5 PRO

Q.	D.	м	our	т

Part #	Cat #
4600204	38765



Integrated motor mount for Weka DK22F and DK32F only



M-5 PRO H. D. QUICK DISCONNECT CORE RIG



M-5 PRO CC	MBINATI	ON DRILL RIG	S WITH	VACL	IUM PUMP	INCLUDES:
Model #	Motor	Motor RPM	Part #	Cat #	Product Weight (lbs)	Combo Stand, Motor,
M5PC-DK32-110V	Weka DK32F	380/800/1200	4220042	38753	119	Vacuum Pump, Control Panel
M5PC-DK32-230V	Weka DK32F	380/800/1200	4220043	38757	119	Control Panel
		ION DRILL RI				
PANEL(Co	ntrol panel not i	needed - Includes LED	meter and or	n/off switc	h on motor)	
M5PC-CB733-WOCP	CB733	550/1000/1600	4220095	39455	115	Combo Stand, Motor,
M5PC-CB744-WOCP	CB744	385/530/975/1340	4220092	81600	119	Vacuum Pump
M-5 PRO CO	OMBINATIO	N DRILL RIGS	WITHOUT	VACU	UM PUMP	
M5PC-DK32-110	Weka DK32F	380/800/1200	4220066	38761	119	Combo Stand, Motor,
M5PC-DK32-230	Weka DK32F	380/800/1200	4220067	38762	119	Control Panel
M-5 PRO AN	ICHOR DE	RILL RIGS WIT	HOUT C	ONTR	OL PANEL	
(Control	panel not neede	d - Includes LED mete	r and on/off s	witch on	motor)	
M5PA-CB733-WOCP	CB733	550/1000/1600	4220097	39533	93	
M5PA-CB744-WOCP	CB744	385/530/975/1340	4220094	81604	96	Anches Stand Mates
M5PA-DK32-110	Weka DK32F	380/800/1200	4220076	47831	94	Anchor Stand, Motor
M5PA-DK32-230	Weka DK32F	380/800/1200	4220077	45062	94	

CB733 and CB744 motors do not require a control panel for operation. These motors include LED amp meter and on/off switch.

M-5 PRO ACCESSORIES							
Description	Part #	Cat #	Weight (lbs.)				
M-5 PRO Anchor Drill Stand Only (39" LONG MAST)	4220071	47807	65				
M-5 PRO Combo Drill Stand Only (39" mast)	4220070	38764	72				
M-5 PRO Quick Disconnect Motor Mount Assembly	4600204	38765	5				
M-5 PRO Quick Disconnect Outrigger Assy (Add 7" of drilling diameter)	4400252	38766	10				
M-5 PRO Quick Disconnect Outrigger Assy (Add 10" of drilling diameter)	4400253	38767	10				
M-5 PRO All Purpose Vacuum Base Assembly (includes vacuum)	4247080	111714	12				




Easy Quick Disconnect Allows For Faster Coring That Cuts Job Costs





When attaching a motor that does not have the integrated motor mount, use Q.D. adapter

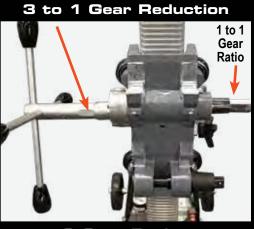

2 Gear Ratios



72" Bit Capacity with Spacers

FEATURES:

- 18" bit capacity with standard pillow block.
- Add-on 4"x6" steel tube spacers available for drilling up to 72" diameter holes.
- Heavy duty 15" x 12" roller carriage
- Massive 72" tall, 4" x 6" rectangular mast
- · Sturdy cast aluminum base (steel base optional)
- 4-spoke handles

- · Wheel kit and leveling bolts
- 6" rubber wheels on stand base
- The large size and heavy duty construction makes the M-6 a safer way to drill with large diameter core bits
- Sold as a stand only so you can create your own system for your applications
- · 2:1 gear reduction makes lifting larger bits easy

M-6 LARGE HYDRAULIC CORE RIG



M-6 DRILL STANDS ONLY							
Description	Part #	Cat #	Product Weight (lbs.)				
Large anchor stand with wheels, and quick disconnect motor mount plate	4277581	47879	175				
Large anchor stand with roller carriage and 120" mast	4277591	13971	195				
M-6 steel anchor base only	4640083	78638	145				
M-6 Roller Carriage	4640114	00973	80				
M-6 Autofeed Q.D. Carriage Assembly	4640115	14651	110				
M-6 Spacer Block (up to 36" diameter bit)	4640026	47072	23				
M-6 Spacer Block (up to 48" diameter bit)	4640025	47073	31				




Optional Steel Base Assembly Includes: base, wheels, leveling bolts and hardware



M-6 Heavy Duty Roller Carriage
With cam lock quick disconnect 1:1 and 1:2 rack & pinion design
and roller adjusters (included with M-6 stand only)



M-6 Autofeed QD Carriage
Assembly

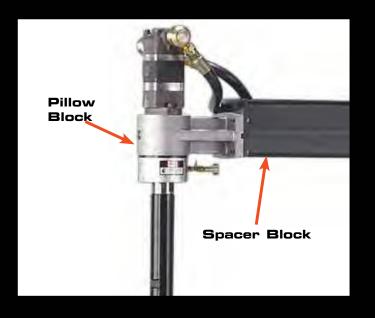

With cam lock quick disconnect



HYDRAULIC DRILL MOTORS

Mounted Hydraulic Motors

Danfoss, Char-Lynn and White Motors

Mounted into a pillow block with spindle. The core bit is then attached to the spindle for drilling. Motors include hydraulic hose connections.



RECOMMENDED BIT RPMs

1/1 1/13						
Bit	Recommended					
Diameter	RPM					
1"	3200					
2"	1600					
3"	1050					
4"	800					
6"	530					
8"	400					
10"	320					
12"	265					
14"	225					
18"	175					
20"	160					
24"	130					
36"	85					
42"	75					

See complete RPM chart on page 177

To choose the right hydraulic motor for your application, follow this formula:

Closest G.P.M. of your power unit + closest RPM of core bit on the Bit RPM chart above and match these values on the chart above to get the Cubic Inch of the motor you need.

HYDRAULIC MOTOR RPM CHART-MAXIMUM RPM WITH CUBIC INCH DISPLACEMENT & GPM COMBINATIONS

)anfoss	s Moto	r	Char-Lynn Motor					or		White Motor	
Cubic Inch	.77	1.16	1.55	1.94	4.9	6.2	8.0	9.6	11.9	14.9	18.7	24.0	32.0
Part #	4250012	4250013	4250014	4250015	4250008	4250007	4250006	4250005	4250004	4250002	4250000	4250003	4250010
Cat #	01836	01837	01838	01839	01833	47655	01832	01831	01830	01828	01826	01829	01834
Part # without hoses	2600061	2600062	2600063	2600064	2600035	2600036	2600037	2600038	2600039	2600040	2600041	2600071	2600030
Cat # without hoses	79166	00459	00460	60281	72115	54629	66922	93802	57887	00451	96417	59570	42499
8 GPM	2640	1680	1232	973	377	298	231	193	155	124	99	77	58
12 GPM	N/A	2520	1848	1459	566	447	347	289	233	186	148	116	87
20 GPM	N/A	N/A	N/A	2553	990	782	606	505	408	326	259	202	152
25 GPM	N/A	N/A	N/A	N/A	1226	969	751	626	505	403	321	250	188



CORE BORE 4 HP Hand Held Hydraulic Motor

- · 3-speed with slip clutch
- 300/800/1600 RPM
- 1.250"-7 spindle (6" capacity)
- 13 GPM maximum flow

4 HP Hand Held Hydraulic Motor					
Part #	Cat #				
4244057	47075				

YDRAULIC & PNEUMATIC Components

HYDRAULIC & PNEUMATIC COMPONENTS









M-4 Pillow Block Assembly

For use with M-4 core rigs and Danfoss motor 1.250"-7 spindle Part # 4600039



Variable speed control that adjusts drilling speeds from zero to the maximum RPM your motor allows. Connects directly into motor. For use with hydraulic mounted motors.

Part # 4699956 (0-25 GPM)

Flow Control Valve

Variable speed control that adjusts drilling speeds from zero to the maximum RPM your motor allows.

Part # 4250019 (0-20 GPM)



Part # 4699967 (0-25 GPM)

HYDRAULIC COMPONENTS							
Description	Part #	Cat #	Product Weight (lbs)				
Pillow Block Assembly-1.250"-7 spindle for Char-Lynn motors	4277539	01853	29				
Pillow Block Assembly-1.875"-7 spindle for Char-Lynn motors	4277540	01855	30				
Pillow Block Assembly-1.250-7 spindle for White motors	4277547	20243	29				
Pillow Block Assembly-1.875-7" spindle for White motors	4277546	99280	30				
Pillow Block Assembly-1.250"-7 spindle for M-4 with Danfoss Hydraulic motors	4600039	47441	6				
In-line On/Off Valve (3/2 way) for power units w/gear motor (CB15 and CB24)	4640090	85296	23				
Flow Control Valve (Hydraulic motors only) 0-20 GPM	4250019	01840	23				
Flow Control Valve (in-line) 0-25 GPM*	4699967	47662	23				
Flow Control Valve, motor (mounted) for Char-Lynn Hydraulic motors only* 0-25 GPM	4699956	47556	9				
Flow Control Valve hose w/1/2" fittings for Char-Lynn Hydraulic flow control valve (4699956)	4699990	49038	12				
Flow Control Valve hose w/3/4" fittings for Char-Lynn Hydraulic flow control valve (4699956)	4699989	48980	12				

* Must order hose kit separately



Ingersoll-Rand Air Motors

- Shown with pillow block
- Variable speeds depending on air source



- · 3-speed with slip clutch
- Includes 5/8"-11 and 1.250"-7 spindle
- Up to 4" bit capacity

AIR-PNEUMATIC MOTORS								
Description	RPM	Safety Override	Max CFM	Part #	Cat #	Product Weight (lbs)		
2.1 HP hand held, 3 speed @ 90 psi	300/500/1500	Slip Clutch	77	4244054	51479	35		
3.8 HP hand held, 3 speed @ 90 psi	190/420/805	Slip Clutch	122	4244053	47377	32		
3.5 HP Ingersoll-Rand	Variable	N/A	95	4244051	01765	31		
8 HP Ingersoll-Rand	Variable	N/A	230	4244052	70339	31		



- Check with the owner or hiring contractor to identify any electrical lines, gas lines or other hazards that may be located in or under the slab or in or behind the wall that will be cored.
- Secure base of the rig stand to prevent movement during coring operations.
- 3. Provide for proper protection below the coring area to prevent any persons from being struck by the falling core. A spotter is recommended.
- If you are using a vacuum to secure a rig to a wall, you must have another way to secure the rig in case power were to be cut off or shut down during drilling. Never stand on a core rig to secure it!



CAUSE: Too much feed pressure.

REMEDY: Open bit with abrasive material (Sand pot, concrete block, chop saw blade).

Reduce feed pressure. Using an ammeter will help control speed and

pressure.

EAUSE: Aggregate is too hard. **REMEDY:** Change to a softer bond.

GLAZING

(The bit stops drilling or is very slow)



Too much feed pressure and not enough water.

Repair the bit if possible. Ease up on feed pressure and increase water flow. REMEDY:

CAUSE Aggregate is too hard. **REMEDY:** Change to a softer bond.

BENT SEGMENTS



Steel reinforcing rod (rebar) **Ease up on the feed pressure.**

Use a higher quality bit and increase the water flow.

Not enough water to properly cool the bit.

REMEDY: Increase the water flow.

Drill rig is not properly anchored

There are three ways of anchoring a core rig. STANDING ON IT IS NOT ONE OF THEM! This quick dirty method damages the bit and the rig and dramatically slows the drilling process. Use an anchor, vacuum, or ceiling

jack to properly secure the core rig.

LOST SEGMENTS (Particularly on bits up to 1-3/4")



EAUSE: Not enough water to remove slurry.

REMEDY: Remove bit and drive core out with a spike through the hub.

Increase water flow.

CAUSE: Core barrel is dented because of hammering on it to remove previous hung up

REMEDY: Repair the barrel. Increase water flow.



OFFERING
VERSATILITY AND
THE PERFORMANCE
YOU NEED TO GET
THE JOB DONE

CB733 & CB744 Both Have Amp Warning Lights



A Control Panel is <u>not</u> needed to run the CE733 or

CORE BORE™ CB744

18" Bit Capacity Electric



CORE BORE™ CB733

16" Bit Capacity Electric

3-Speed

CB744 FEATURES

- 25 amp, 115 volt or 230 volt
- Standard 16" capacity, 18" maximum
- Built-in LED amp meter no control panel needed
- Water hose connection
- 1.250"-7 threaded spindle
- Slip clutch
- · Bubble level
- Extra long cord
- · Includes open end wrench

- 20 amp, 120 volt
- Up to 16" bit capacity
- Built-in thermal overload protection
- · Water connection for wet drilling
- · Includes on/off switch/amp meter
- 1.250"-7 threaded spindle

CORE BORE™ ELECTRIC DRILL MOTORS

Motor Make/Model	AMP	Loaded RPM	Part # without on/off switch	Cat # without on/off switch	Part # with on/off switch	Cat # with on/off switch	Product Weight (lbs)
CORE BORE™ CB733	25	345/630/1000			4244126	83983	28.4
CORE BORE™ CB744	25	225/300/565/780			4244125	78699	
CORE BORE™ CB744 (230V)	25	225/300/565/780			4244127	41428	

WEKA® DRILL MOTORS

WEKA® DK22

WEKA® DK32

WEKA® SR38





For use on the DK22, DK32 and SR38 models. Allows exact indication of the core center. Internal threads installs directly onto motor spindle.

SR38-18 Speed RPM Ranges Number of Motor Steps: 6 - Number of

Mechanical Gears 3

Electric Speed Step#	Mechanical Gear 1	Mechanical Gear 2	Mechanical Gear 3
1	445	880	1370
2	380	755	1180
3	320	630	980
4	260	520	810
5	220	430	670
6	180	360	560

16" Bit Capacity **Electric**

- Heavy duty
- · Water connection
- 1.250"-7 threaded spindle
- Recommended for bits up 1"-12" Max 16"

18" Bit Capacity **Electric**

- Heavy duty
- Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 2"-16" Max 18"

18" Bit Capacity Electric

- 18 speeds
- Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 1-1/2"-16" Max 18"

WEKA® ELECTRIC DRILL MOTORS							
Motor/Model #	AMP	No Load RPM	Loaded RPM	Part #	Cat #	Product Weight (lbs.)	
WEKA DK22	23 (110V)	550/1120/1680	300/640/960	4244018	01741	31	
WEKA DK22	11 (230V)	550/1120/1680	300/640/960	4244016	47069	31	
WEKA DK22L	23 (110V)	460/940/1400	250/520/780	4244105	54872	31	
WEKA DK22S	23 (110V)	800/1640/2430	420/880/1300	4244014	47828	31	
WEKA DK22S	11 (230V)	800/1640/2430	420/880/1300	4244029	47070	31	
WEKA DK32	30 (110V)	380/800/1200	230/480/720	4244059	46896	31	
WEKA DK32	15 (230V)	380/800/1200	230/480/720	4244058	47071	31	
WEKA DK32F*	30 (110V)	380/800/1200	230/480/720	4244120	56143	31	
WEKA DK32F*	15 (230V)	380/800/1200	230/480/720	4244121	44292	31	
WEKA SR38	16 (230V)	See cha	rt above	4244124	68236	36	

All Weka motors include on/off switch

*F series include special flange adapter for M-5 PRO only (11" maximum bit capacity)

LASER POINTER

I OR WEILA IVIO I ORS						
Description	Part #	Cat #				
Weka laser pointer for DK22, DK32 & SR38	2708604	59812				

WEKA® DRILL MOTORS





20" Bit Capacity **Electric**

- Heavy duty
- · Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 3"-18" Max 20"

24" Bit Capacity Electric

- · Heavy duty
- · Water connection
- 1.250"-7 threaded spindle
- Recommended for bits 3"-20" Max 24"

35" Bit Capacity Electric

- 15-Speed-480V, 3 phase-7500 watt
- Water cooled with water protection
- No carbon brushes and rotating windings translate into low maintenance
- 1.250"-7 threaded spindle
- Recommended for bits 5"-26" Max 35"

WEKA® ELECTRIC DRILL MOTORS						
Motor/Model #	AMP	No Load RPM	Loaded RPM	Part #	Cat #	Product Weight (lbs)
WEKA DK42	8.2 (460V-3PH)	200/390/620	190/410/610	4244022	01743	48
WEKA DK42	14.2 (230V-3PH)	200/390/620	190/410/610	4244023	01744	48
WEKA DK42S	8.2 (460V-3PH)	285/560/880	290/610/910	4244027	47641	48
WEKA DK42S	14.2 (230V-3PH)	285/560/880	290/610/910	4244024	01745	48
WEKA DK42AL	8.2 (460V-3PH)	170/330/510	130/280/430	4244066	94768	48
WEKA DK42AL	14.2 (230V-3PH)	170/330/510	130/280/430	4244056	91963	49
WEKA DK52	9 (460V-3PH)	170/340/520	150/290/440	4244060	47119	56
WEKA DK52	18 (230V-3PH)	170/340/520	150/290/440	4244061	48023	58
WEKA SR75S	14 (480V-3PH)	75/90/105/130/150 150/175/210/250/290 230/280/330/390/460	90/180/280	4244117	16537	48.5

All Weka motors include on/off switch



CORE BORE Hand-Held Motors



CB215







3" Bit Capacity Hand-Held 6" Bit Capacity Mounted Electric

FEATURES:

- 1800 Watt, 115 volt electric motor
- 3-speed gear box (1000/1600/4450 RPM) with slip clutch
- Side handle for stable coring (removable)
- 1.250-7 threaded spindle with 5/8"-11 adapter
- · Vacuum hose connection for dry drilling
- LED load indicator in visible position
- Locking gear lever

Includes: Plastic molded carrying case, side handle, and wrench



3" Bit Capacity Hand-Held 6" Bit Capacity Mounted Electric

FEATURES:

- 1800 Watt, 115 volt electric motor
- 2-speed gear box (1400 rpm and 2300 rpm) with slip clutch
- Side handle for stable coring
- 1.250-7 threaded spindle with 5/8"-11 adapter
- Water hose connection for wet drilling
- PRCD/GFCI Class I cord
- Works with M-4 stand and hand held motor mounts
- Top bubble level for accuracy

Includes: Plastic molded carrying case, side handle, and wrench





CORE BORE HAND-HELD MOTORS							
Motor/Model #	AMP	No Load RPM	Loaded RPM	Part #	Cat #	Product Weight (lbs.)	
CB215	15 (115V)	1000/1600/4450		4244142	108730	13	
CB515	15 (115V)	1400/2300		4244128	98794	10.5	
WEKA DK12*-Wet only	14	970/2330/4400	580/1400/2900	4244017	01738	25	
WEKA DK12*-Wet only	7 (230V)	970/2330/4400	580/1400/2900	4244013	54212	25	



Weka[®] DK12

3" Bit Capacity Electric

FEATURES:

- Thermal overload protection switch
- · Side handle for stability
- · Water connection for wet coring only
- 5/8"-11 or 1.250"-7 spindle
- Three speed for bits up to 3" (6" mounted)
- Includes carrying case and wrench
- · Two leveling bubbles for accurate coring
- Can be used on M-3 & M-4

Weka® DK13

3" Bit Capacity Electric

FEATURES:

- Thermal overload protection switch
- · Side handle for stability
- Dust port and water connection for wet or dry coring
- 5/8"-11 or 1.250"-7 spindle
- Three speed for bits up to 3" (6" mounted)
- Includes carrying case and wrench
- · Two leveling bubbles for accurate coring
- · Can be used on M-3 & M-4

Weka® DK16

3" Bit Capacity Electric

FEATURES:

- Electronic overload system
- · Two leveling bubbles for accurate coring
- · Side handle for stability
- · Water connection for wet coring only
- 5/8-11 or 1.250-7 spindle
- Three speed for bits up to 3"
- · Two leveling bubbles for accurate coring

Hand-held Weka Motors Include: Plastic molded carrying case, side handle, 1/2" BSP male to 5/8-11 male adapter, wrench



WEKA® C	Case Only
Da.+ #	O-4 #

Part #	Cat #
2701483	47368

For use on all Weka handheld motors

WEKA® HAND-HELD MOTORS							
Motor/Model #	AMP	No Load RPM	Loaded RPM	Part #	Cat #	Product Weight (lbs.)	
WEKA DK12*-Wet only	14	970/2330/4400	580/1400/2900	4244017	01738	25	
WEKA DK12*-Wet only	7 (230V)	970/2330/4400	580/1400/2900	4244013	54212	25	
WEKA DK13*-Wet or Dry	14	970/2300/4400	580/1400/2900	4244062	47055	25	
WEKA DK16	19 (110V)	970/2300/4400	580/1400/2900	4244067	93678	23	



CORE BIT ADAPTERS



CORE BIT ADAPTERS							
Description	Top Thread	Bottom Thread	Part #	Cat #	Weight (lbs.)		
1015	1.250"-7 Female	5/8"-11 Male	4400008	01878	2 lbs.		
1015-B	1.250"-7 Female	5/8"-11 Bolt * Male	4400162	47697	2		
1510	5/8"-11 Female	1.250"-7 Male	4400009	01880	2		
1016	1.250"-7 Female	5/8"-18 Male	4400010	01881	2		
1020	1/2"-20 Female	5/8"-11 Male	4400011	01882	2		
DK13-DVH	1.250"-7 Female	1.250"-12 Male	4400320	75698	2		
Bantum-15	Bantum Female	5/8"-11 Male	4400012	01883	2		
Bantum-15	Bantum Female	1.250"-7 Male	4400051	01911	2		
Morse #2	#2 Morse Taper Male	5/8"-11 Male	4400068	01920	2		
Morse #3	#3 Morse Taper Male	5/8"-11 Male	4400061	01917	2		
Morse #4	#4 Morse Taper Male	5/8"-11 Male	4400062	01918	2		
Morse #5	#5 Morse Taper Male	5/8"-11 Male	4400063	79291	2		
3/8" S.S.	3/8" Straight Shank Male	5/8"-11 Male	4400056	01913	1		
1/2" S.S.	1/2" Straight Shank Male	5/8"-11 Male	4400033	01899	2		
5/8" S.S.	5/8" Straight Shank Male	5/8"-11 Male	4400087	01936	1		
1/2" British standard piping∞	1/2" BSP Male	5/8"-11 Male	4400037	01905	2		
1/2" British standard piping∞	1/2" BSP Male	1.250"-7 Male	4400036	01903	2		
Large thread reducer	1.875"-7 Female	1.250"-7 Male	4400121	01949	5		
Large thread adapter	1.250"-7 Female	1.875"-7 Male	4400134	01956	5		

^{*} Male bottom thread is a replaceable grade 8, 5/8"-11 bolt with water way ∞ For use on Weka motors

5/8"-11 Bolt with Water Way

Part #	Cat #
4400163	53577

Standard core bits have the following threaded hub sizes:

1-1/2" and under (bit diameter)= 5/8"-11 thread

(5/8" diameter, 11 threads per inch)

1-5/8" and up (bit diameter) = 1-250"-7 thread

(1-1/4" diameter, 7 threads per inch)

CORE BIT Adapters - Competition Style

CORE BIT ADAPTERS COMPETITION STYLE





CORE BIT ADAPTERS - Competition Style							
Compatible Motor*	Top Thread	Bottom Thread Male	Part #	Cat #	Weight (lbs)		
DD100, DD200, DD130 with BI+ connection	Hilti® Quick Disconnect 6-Slot	1.250"-7	4400332	90755	2		
DD100, DD200, DD130 with BI+ connection	Hilti® Quick Disconnect 6-Slot	5/8"-11	4400333	90754	2		
DD200	Spline	1.250"-7	4699992	49654	2		
DD250, DD160, DCM1.5 with BU connection	5/8"-11 Male	Hilti Spline	4699974	66435	2		
DD250, DD160, DCM1.5 with BU connection	1.250"-7 Male	Hilti Spline	4699973	64011	2		

These adapters for use on Hilti® machines to connect to standard 1-1/4-7 or 5/8-11 threaded bit hubs. Hilti® is a registered trademark of the Hilti® Corporation and is not affiliated with Diamond Products Limited.





Hilti[®] QD to Weka[®] Motor Mount

Part #	Cat #
4648065	88660

Hilti® is a copyright of Hilti Corporation and is in no way affiliated with Diamond Products Limited



DRILL RIG Columns

DRILL RIG CO	DLUMNS	(MASTS	
			Shipping
Description	Part #	Cat #	Weight (lbs.)
M-1-2-1/2" square x 36" long	4645084	02120	14
M-1-2-1/2" square x 42" long	4645015	02079	16
M-1-2-1/2" square x 48" long	4645081	02116	18
M-1-2-1/2" square x 60" long	4645082	02117	23
M-1-2-1/2" square x 72" long	4645083	02119	27
M-1 ANGLE 2-1/2" square x 36-3/4" long	4645070	02106	14
M-1 ANGLE 2-1/2" square x 42" long	4645068	02104	16
M-1 ANGLE 2-1/2" square x 48" long	4645086	54972	18
M-1 ANGLE 2-1/2" square x 60" long	4645085	61782	23
M-2-2-7/8" square x 36" long	4641003	02006	24
M-2-2-7/8" square x 42" long	4641002	02004	28
M-2-2-7/8" square x 48" long	4641078	02036	32
M-2-2-7/8" square x 60" long	4641079	02037	40
M-2-2-7/8" square x 72" long	4641080	02038	48
M-2-2-7/8" square x 84" long	4641084	52242	56
M-2-2-7/8" square x 96" long	4641082	02039	64
M-2-2-7/8" square x 108" long	4641083	02040	72
M-2-2-7/8" square x 120" long	4644120	54847	80
M-2 ANGLE 2-7/8" square x 36" long	4641089	02043	24
M-2 ANGLE 2-7/8" square x 42" long	4641068	02028	28
M-2 ANGLE 2-7/8" square x 48" long	4641091	51671	32
M-2 ANGLE 2-7/8" square x 60" long	4641086	52192	40
M-2 ANGLE 2-7/8" square x 72" long	4641087	51883	48
M-3 STAIR 1-1/2" square x 25" long	4643001	59189	7
M-3 STAIR 1-1/2" square x 33" long	4643037	02061	9
M-3 STAIR 1-1/2" square x 37" long	4643033	52857	11
M-3 STAIR 1-1/2" square x 41" long	4643034	02058	13
M-3 STAIR 1-1/2" square x 47" long	4643032	02057	15
M-3 ANCHOR 1-1/2" square x 34" long	4643002	02044	9
M-3 ANCHOR 1-1/2" square x 38" long	4643006	02047	10
M-3 ANCHOR 1-1/2" square x 42" long	4699923	54392	11
M-4-1-5/8" x 2" x 30" long	4600007	01990	4
M-4-1-5/8" x 2" x 42" long	4600034	51129	6
M-4 Anchor/Swivel 1-5/8" x 2" x 30" long	4600042	49017	4
M-4 Anchor/Swivel 1-5/8" x 2" x 42" long	4600047	47722	6
M-5 2-1/2" x 3" x 32" long	4600122	74431	9
M-5 2-1/2" x 3" x 40" long	4600106	49519	11
M-5 2-1/2" x 3" x 50" long	4600134	51415	14
M-5 2-1/2" x 3" x 60" long	4600123	88812	17
M-5 ANCHOR 2-1/2" x 3" x 40" long	4600115	49695	11
M-5 ANCHOR 2-1/2" x 3" x 50" long	4600135	51725	14
M-5 ANCHOR 2-1/2" x 3" x 60" long	4600127	58986	17
M-6 3-7/8" x 5/-7/8" x 60" long	4640123	14562	68
M-6-3-7/8" x 5-7/8" x 72" long	4640000	47837	84
M-6-3-7/8" x 5-7/8" x 96" long	4640042	52380	94
M-6-3-7/8" x 5-7/8" x 120" long	4640063	55510	104



Huge selection of columns/masts in lengths up to 120"

Use custom size masts to build your core rig the way you want

CORE BIT Extensions



HAVE A SPECIAL APPLICATION? WE MAKE CUSTOM EXTENSION RODS TO HANDLE YOUR NEEDS QUICKLY!



NWJ threads have a large thread pitch that make it easy to unscrew the core bit and/or other extensions

4400326

Male 1.875"-7-NWJ Female adapter

78494



M-2 ANGLE PIVOT Stands



M-2 STAND WITH PIVOT BASE SIDE TO SIDE VERSION

 Description
 Part #
 Cat #

 Ingle Side/Side Stand
 4220073
 113930

Includes angle pivot base, M-2 mast, and carriage.

SAFER DRILLING

 Instead of MAKING an old rig work, let this pro series rig work for you!

0° to 50° -50° to 0°

The pivot base can be adjusted to the angles shown stamped into the base itself.

Why Use the M-2 Angle Pivot Stand?

- When drilling in tight, limited space the pivot stand is easier to mount
- The pivot base rig makes tough mounting scenarios a quick and easy process







Drill Mount Wedge


- Allows 90 degree applications
- Great for curb drilling

DRILL MOUNT WEDGE FOR 90 DEGREE DRILLING						
Description	Part #	Cat #				
Drill mount wedge	4600607	100384				





BIT ROLLER SUPPORT						
Description	Part #	Cat #				
Roller support for large bits 14" to 44" diameter	4600606	97434				

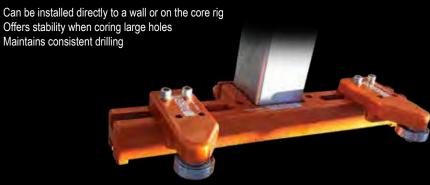

€

DRILLING Accessories











Single Switch Control Panel

With amp meter, dual outlet-single switch control both gauge max at:15, 18 or 20 amp Part # 4277537 (115V) Part # 4277538 (230V)

Dual Switch Control Panel

With amp meter, dual outlet two switches to control each outlet, gauge max at: 15, 18 or 20 amp Part # 4243000 (115V) Part # 4243075 (230V)

Digital Dual Switch Control Panel

With amp meter, dual outlet two switches to control each outlet, gauge max at: 15, 18 or 20 amp Part # 4243012 (115V)

DK42 Control Panel

With amp meter, volt meter, motor reversing switch, vacuum pump switch, single and three phase outlets Part # 4243006 (220V)

Heavy Duty On/Off Switch

Used on Core Bore and Milwaukee motors Part # 4244021 (115V) Part # 4243021 (230V)











EZ Cord Adapter

12" long cord for use on CB744, Weka DK32 (110V) Core Drills and C16 Electric Saw. 12AWG - 115V30 Amp to 15 Amp Part # 4699131

CONTROL PANELS/AMP METERS					
Description	Voltage	Part #	Cat #	Weight (lbs)	
Dual Switch/Dual Outlet	115V	4243000	01724	5	
Dual Switch/Dual Outlet	230V	4243075	01729	5	
Single Switch/Dual Outlet	115V	4277537	01851	4	
Single Switch/Dual Outlet	230V	4277538	01852	4	
EDI Control Panel Dual Switch/Outlet 25amp	115V	4243002	84961	5	
Heavy Duty On/Off Switch	115V	4244021	01742	2	
Heavy Duty On/Off Switch	230V	4243021	56316	2	
Single On/Off Switch (for Milwaukee motors)	115V	4277583	17617	2	
Dual Switch/Dual Outlet (for Milwaukee motors)	115V	4277582	47203	5	
Dual Switch/Outlet for Weka DK22&DK32	115V	4277594	03325	5	
Dual Switch/Outlet for Weka DK22&DK32	230V	4277595	84217	5	
Control Panel 1 & 3 Phase for Weka DK42	220V	4243006	01726	5	
Digital Dual Switch Control Panel	115V	4243012	37464	6	
Single Switch Control Panel Bracket Kit for M-1/M-2		4699968	49262	1	
M-2 Bracket Kit for Single Switch Control Panel to M-2 Roller Carriage		4699981	69502	2	
EZ Cord Adapter - 30amp twist lock to 15 amp straight male end	115V	4699131	94366	1	

VACUUM PUMPS					
Description	Voltage	Part #	Cat #	Weight (lbs)	
Gast 1/8 HP, 24hg, vacuum pump with fittings-M-1/M-2*	115V	4244075	01767	9	
Gast 1/8 HP, 24hg vacuum pump with fittings-M-1/M-2	230V	4244076	01769	9	
Gast 1/8 HP, 24hg vacuum pump with fittings-M-3/M-4*	115V	4244077	01770	9	
Gast 1/8 HP, 24hg vacuum pump with fittings-M-3/M-4	230V	4244079	01772	9	
Gast 1/8 HP, 24hg vacuum pump without fittings	115V	2600016	00443	8	
Gast 1/8 HP, 24hg vacuum pump without fittings	230V	2600017	56522	8	
Gast 1/8 HP, 24hg vacuum pump with fittings for A.P.V. base	115V	4244078	01771	9	
Gast 1/8 HP, 24hg vacuum pump with fittings for A.P.V. base	230V	4244080	80355	9	
Gast 1/8 HP, 24hg vacuum pump with fittings-M-5 with on/off switch	115V	4244090	46895	9	
Gast 1/8 HP, 24hg vacuum pump with fittings-M-5	230V	4244091	51410	9	
Vacuum pump cord-100ft, 12 gauge-125V with 15 amp connectors	125V	4699104	15914	15	





Water Swivel 375 HD

5/8"-11 female to 5/8"-11 male Part # 4400014



Water

Swivel

750 HD

5/8"-11 female to

1.250"-7 male

Part # 4400013

Air Vacuum Swivel 5/8"-11 female to

1.250"-12 male for DVH bits Part # 4600125



M-4 Motor Mount Clamp Assembly

Allows you to mount the DK12 or DK13 on the M-4 (60mm hole) Clamp only Part # 4600003 Handle only - Part # 2400151





M-2 Roller Carriage

Adjustable with heavy duty rollers **Part # 4277531**



M-2 Dovetail Motor Mount Quick Disconnect

Removes motor quickly Part # 4648007



M-5 Style Quick Disconnect

for M-1 & M-2 Allows use of QD spacers Part # 4699961



7"-M-5 PRO QD Spacer

For the fastest disconnect that adds 7" of drilling diameter Part # 4400252



10"-M-5 PRO QD Spacer

For the fastest disconnect that adds 10" of drilling diameter Part # 4400253

				Part # 4400255
MOTOR N	OUNTS AND	DISCONNE	CTS	
Description		Part #	Cat #	Weight (lbs)
M-1/M-3 Dovetail Motor Mount Quick	Disconnect	4648010	02150	5
M-2 Dovetail Motor Mount Quick D	Disconnect	4648007	02147	5
M-2 Carriage to M-1/M-3 Motor Mou	nt Assembly	4641131	85316	5
M-4 Motor Mount Clamp Assembly for	Weka Motors	4600003	01987	5
M-4 Motor Mount Assembly for Milwa	aukee Motors	4600029	02001	5
M-5 Style Quick Disconnect for M-1 and M-2 (a	llows use of Outrigger)	4699961	46830	10
M-5 PRO Quick Disconnect Spacer Assembly (ac	lds 7" of drilling diameter)	4400252	38766	10
M-5 PRO Quick Disconnect Spacer Assembly (ac	ld 10" of drilling diameter)	4400253	38767	10
M-5 Quick Disconnect Spacer 7" Exter	sion Assembly	4400312	84939	10
M-5 Quick Disconnect Spacer 10" External	nsion Assembly	4400313	47129	12
Weka to M-2 motor mount assembly (I	OK22 or larger)	4648033	02161	8
Weka and CB700 to M-1/M-3 motor mount assemble	y (on Weka-DK22 or larger)	4648031	02160	8
M-1/M-2/M3 motor mount assembly for M	filwaukee motors	4648029	02159	10
Weka hand held to M-1/M-3 motor mo	ount assembly	4648004	02144	8
M-1 dovetail motor mount up-	grade	4245000	51676	4
M-2 dovetail motor mount up-	grade	4242000	01723	4
WATE	R AND VACUUI	M SWIVELS		
Water Swivel 1.250"-7 Female to 1.		4400186	53840	10
Water Swivel 750 HD 5/8"-11 Female to	1.250"-7 Male	4400013	01884	10
Water Swivel 750 HD 5/8"-16 Female to	1.250"-7 Male	4400304	01980	10
Water Swivel 375 HD 5/8"-11 Female	o 5/8"-11 Male	4400014	01885	10
Water Swivel 375 HD 5/8"-16 Female		4400303	01979	10
Air Vacuum Swivel-5/8"-11 Female to		4400125	01950	10
Air Vacuum Swivel 5/8"-16 Female to		4400302	58733	10
1-1/4"-7F 1.250-12M Threaded Adapter for Use of		4400320	75698	3
	ROLLER CARRI	AGES		
M-2 Roller Carriage Assem		4277531	01844	15
M-2 Roller Carriage Assembly for Autofeed Syste	m (gear box not included)	4277593	02370	10
Gear Box/Carriage Only for M-2 Roller Carriage		4277598	16635	12
	SPACER BLO			
M-1 (2") Spacer Block (adds 4" of dri		4400072	01924	5
M-2 (2") Spacer Block (adds 4" of dri		4400073	01926	5
M-5 Spacer Block (for electric drill motors on		4600136	47118	15
M-6 Spacer Block (up to 36" capa	• /	4640026	47072	22
M-6 Spacer Block (up to 48" capa	city) 15.5"	4640025	47073	30

€

DRILLING Accessories



Electric Cords with Twist Lock Plug to Straight Plugs



Spindle Wrench for Core Bore and Milwaukee Motors Part # 2400010



Core Bore Stop Box

Shuts off the electricity to the motor(s) if the core bit hits grounded metal.

Part # 4243050 (115V for 15 amp use)

Part # 4243051 (115 V for 20 amp use)



E-400F Water Pressure Tank with Fittings

Available without fittings. Heavy duty model for Weka motors available. For dust suppression, not wet core drilling.(3.5 Gallon)



Helps keep water and slurry contained.
(Different versions for M-1, M-2 and M-4 rigs)
(Max. 3" Diameter Core Bit)

Various sizes available



E-350 Water Collector Ring with Teel Pump

Helps keep water and slurry contained. (Max. 8" Diameter Core Bit)

CORING ACCESSORIES				
Description	Part #	Cat #	Weight (lbs.)	
Spindle Wrench (M32) for Core Bore CB733 & CB744 Motors	2709103	69499	4	
1-3/8" Spindle Wrench for Milwaukee Motors	2400010	00201	5	
1-1/4" Spindle Wrench for WEKA motors (except SR75)	2400015	00206	5	
36mm Spanner Wrench for M1AA and WEKA SR75	2704103	96047	4	
Electric Cord-50ft, 12GA, 115V, 20amp Twist to 15amp Straight *	4699100	47884	13	
Electric Cord-100ft, 12GA, 115V, 20amp Twist to 15amp Straight *	4699101	48548	25	
Electric Cord-50ft, 10GA, 115V, 30amp Twist to 15amp Straight **	4699102	47005	16	
Electric Cord-100ft, 10GA, 115V, 30amp Twist to 15amp Straight **	4699103	47987	31	
DK42 cord-100ft-12 gauge, 250V, 20amp	4699105	49828	5	
Power Splitter Sidewinder-230V-2(110V) outlets	2800379	52225	22	
Core Bore Stop Box-115V-for 15 amp use	4243050	01728	10	
Core Bore Stop Box-115V-for 20 amp use	4243051	22092	10	
DK42 Control Panel Supplies 230V current at 1 and 3 phase	4243006	01726	25	
DK42 Phase converter 1 phase 230V to 3 phase 230V	4243010	01727	45	
E-400F Water Pressure Tank with Fittings	4400021	01894	5	
E-400 Water Pressure Tank without Fittings	2600042	00452	5	
E-400F HD Water Pressure Tank with Fitting (for Weka Motors)	4400526	15800	5	
Trap Ring with 1-1/2" Hose Adapter for M-2 (Max 6" Diameter Bits)	4648058	82178	2	
E-150 Trap Ring Only (Max 8" Diameter Bits)	4400016	01887	5	
E-300 Dry Trap Ring for Dry Drilling (Max 8" Diameter Bits)	4400018	01891	8	
Wet/Dry Vacuum Hose Adapter (Max 8" Diameter Bits)	4400017	01889	1	
E-350 Water Collector Ring & Teel Pump (115V) (Max 8" Diameter Bits)	4400015	01886	10	
E-350 Water Collector Ring & Teel Pump (230V) (Max 8" Diameter Bits)	4400201	01969	10	
Teel Pump (115V) for Trap Rings (Max 8" Diameter Bits)	4400264	96860	5	
Teel Pump (230V) for Trap Rings (Max 8" Diameter Bits)	4400101	01940	5	

^{*} For heavy duty on/off switch. ** For single and dual switch control panels





Hole Roughner Tool

Adapter with welded spiked tool for creating a rough surface in a core hole. Useful for providing better adhesion of epoxy anchor systems inside the hole. The spiked end is made up of 6 carbide tips. Includes 1.250"-7 adapter (welded) Ask about sizes not listed.



Core Catcher Assembly

Attaches to spindle on the top end and an eye- bolt is anchored into the core.

The cable is attached to the eye-bolt or hook.

Includes: Spindle adapter and catcher cable 8" OD x 10" core maximum or 10" OD x 6" core maximum-Cat # 78095







The Extractor Core Retrieval Tool

The cable is inserted down the sides of the core. The cable clings to the core as the rings are pulled by hand or lifted by other means. 8" core maximum. Cat # 26386

CORING ACCESSORIES				
Description	Part #	Cat #	Weight (lbs.)	
1-7/8" Carbide Hole Roughner with (6) .375" tips	CB1875HR	77440	6	
2" Carbide Hole Roughner with (6) .375" tips	CB2000HR	27398	8	
3" Carbide Hole Roughner with (6) .375" tips	CB3000HR	28447	10	
4" Carbide Hole Roughner with (6) .625" tips	CB4000HR	28448	12	
5" Carbide Hole Roughner with (6) .625" tips	CB5000HR	26522	14	
CORE REMOVAL				
Core Catcher Assembly Complete	4400327	78095	8	
The Extractor-Core Retrieval Tool	2401000	26386	1	





M-2 Autofeed Control System

- · Automatically runs your M-2 core rig
- Enables the operator to use several core drills at the same time
- Extremely efficient serial drilling-saves labor especially in hard aggregate
- The unit keeps the motor load at the preset value (17 to 24 amps at 115V; 10 to 15 amps at 230V)
- For use on Weka DK22 through DK32, CB748 and all Milwaukee drill motors
- · Autofeed unit consists of control unit and a 2:1 gear box with roller carriage only

AUTOFEED CONTROL SYSTEMS					
Description	Part #	Cat #	Weight (lbs.)		
Autofeed Complete with M2 Roller Carriage 115V/30 Amp	5801228	24135	10		
Autofeed Complete with M2 Roller Carriage 230V/15 Amp	5800661	91154	10		
M-2 Autofeed Control 115V/30 Amp (without M2 carriage)	5800715	75649	20		
M-2 Autofeed Control 230V/15 Amp (without M2 carriage)	5800503	48563	12		





PIPE MOUNT SYSTEM

- · Works with any Core Bore rig
- · Can be used on any size pipe
- Includes base plate, tie-down strap and hardware
- · Bit capacity depends on rig being used

PIPE MOUNT				
Description	Part #	Cat #	Weight (lbs.)	
Pipe Mount Assembly (Specify Core Rig Model)	4400509	64823	10	





Blade Measuring Gauge

Dial or Digital available: indicates the wear on a diamond blade. Great for measuring rental blades. Part # 4400208 (Micrometer), Part # 4400209 (Digital)



Bit Wear Measuring Adapter Kit

Attaches to the Blade Measuring Gauge to measure core bit wear.

Part # 4400218



Vacuum Plate with Wheels

All purpose vacuum base (A.P.V.) that turns your small anchor base into a vacuum base. Up to 6" diameter core bits accepted. Includes: base, vacuum mount, wheel kit and vacuum gasket.

Part # 4247075



Bit Sharpening Pot

Plastic bucket that includes a cast iron plate and #60 aluminum oxide sand for sharpening dull core bits. The sand acts as an abrasive to expose the diamonds in the segments.

Part # 4400022



Bit Roller Assembly

with ball bearings.

Part # 4600300

Super Nut Used with drop-in anchors to quickly

anchor a rig.
Part # 4400069 (3/8"-16)
Part # 4400070 (1/2"-13)

Part # 4400070 (1/2"-13)



Super Bit Spacer (metal)

Makes it easier to remove bits from the spindle.

Part # 4600502



Vacuum Gaskets Rubber gasket that ensures a positive suction on flat surfaces. Keeps the rig in place. All rig models available

MISC ACCESSORIES				
Description	Part #	Cat #	Weight (lbs)	
Blade Measuring Gauge with Digital Micrometer	4400208	01972	12	
Blade Measuring Gauge with Dial Indicator	4400209	01973	12	
Bit Wear Measuring Adapter Kit (attaches to Blade Gauge)	4400218	01974	12	
Vacuum Plate with Wheels (fits any small anchor base)	4247075	01818	18	
Bit Lifting Eye 1.875"-7 Thread Assembly	4400223	64228	2	
Bit Lifting Eye 1.250"-7 Thread Assembly	2400190	58593	1	
Sharpening Pot and Sand (to sharpen core bits)	4400022	01895	25	
Segment Brazing Tool	4400023	01896	1.7	
Ceiling Jack for M-1, M-3 & M-5 rigs	4645016	02080	3	
DRILL MOTOR & SI	PINDLE ACC	ESSORIES		
Bit Roller Assembly	4600300	12624	1	
3/8"-16 Super Nut	4400069	01921	1	
1/2"-13 Super Nut	4400070	01922	1	
5/8"-11 Super Nut	4400071	01923	1	
Plastic Bit Washer 1-1/4"	1400030	00034	0.1	
Plastic Bit Washer 1-7/8"	1400185	50811	0.1	
Copper Bit Washer 1-1/4"	2701563	47477	0.1	
Super Bit Spacer (metal) 1-1/4"	4600502	47552	0.2	
VACUUM B	ASE GASKE	TS		
Vacuum gasket for M-1 vacuum base-50" long (glued)	4645020	02083	.1	
Vacuum gasket for M-2 vacuum base-50" long (glued)	4641024	02022	.1	
Vacuum gasket for M-3 vacuum base-30-1/2" long (glued)	4643040	02064	.1	
Vacuum gasket for M-4 vacuum base-38" long (glued)	4600016	01995	.1	
Vacuum gasket for M-5 vacuum base-46" long (glued)	4600132	47445	.1	
Vacuum gasket for APV base-48-1/2" long (glued)	4643027	02055	.1	
ANCHORS & SETTING TOOLS				
1/2" Anchors (box of 50)	ANCHOR-1/2	46822	4	
3/8" Anchors (box of 50)	ANCHOR-3/8	46857	4	
1/2" Setting Tool	SETTINGTOOL-1/2	46823	.5	
3/8" Setting Tool	SETTINGTOOL-3/8	74846	.5	



BLADE BANDIT & ACCESSORIES







BLADE

For Dust Removal

- Installs on most side grinders
- · Can be used WET or DRY
- For use with diamond blade, tuck point blade or .375"
 V-crack blades with hub
- 1-1/2" vacuum port
- Can be used wet or dry
- Visible depth adjustment
- Clear polycarbonate for visible cutting
 - Heavy duty, flexible material to withstand rugged job sites

Vac Adapter Included



BLADE BANDIT				
Description	Part #	Cat #		
Blade Bandit for 5" blades	2508106	77540		
Blade Bandit for 7" blades	2508107	77617		

HOSE ADAPTERS

LADE BANDIT

Helps bypass special proprietary quick disconnect vacuum hoses. Fits and adapts to almost any vacuum hose.

DUST BANDIT



- Inside diameters: 1.250", 1.5" & 2.5"
- Outside diameters: 1", 1.250" & 2"

18" Core Vac Adapter Hose

- · 1.250" & 2.5"
- Great for use with the Bit Bandit

A STATE OF THE STA

Vac Adapter for Blade Bandit and C14/C16 Saws

Included with the Blade Bandit

	-	6
•	1	
	-1	
	3	

CORE VAC ACCESSORIES				
Description	Part #	Cat #		
Core Vac Multi-Hose Adapter	2508104	31810		
18" Core Vac Adapter Hose	2507000	35545		
Vac Adapter for Blade Bandit, C14, C16, No Hose	2508129	00371		
Vac Adapter for Blade Bandit with 15 ft. Hose	2508108	03966		







BIT PBAN

- Installs in seconds
- Can be used WET or DRY
- 1-1/4" vacuum port
- Can be used wet or dry
- Clear polycarbonate for visible coring
- Heavy duty, flexible material to withstand rugged job sites

BIT BANDIT				
Description	Part #	Cat #		
Bit Bandit for 1" to 4" diameter bits	2508102	92859		
Bit Bandit for 2" to 8" diameter bits	2508103	92819		

CUP BA

For Dust Removal

- Rubber collar allows movement with the tool and fits any grinder
- Can be used WET or DRY
- Clear polycarbonate for visible grinding
- Fits 3 size vacuum ports: 1-1/4", 2" & 2-1/4"
- Removable edge to allow grinding against a wall
- Heavy duty material to withstand rugged job sites

CUP BANDIT		
Description	Part #	Cat #
Cup Bandit for 5" cup grinders	2508100	93507
Cup Bandit for 7" cup grinders	2508101	93684



BIT & CUP BANDIT



CV150C VACUUMS

MINI HEPA WET/DRY PORTABLE VACUUM

Lightweight, High Filtration, Single-Phase Compact Industrial Vacuum with <mark>HIPA</mark> Clean System





Pre-Filter for Dry Conteinment



Containment Bag for Wet or Dry

HEPA FILTERS



CV150C Vacuum Electric

FEATURES:

- Wet and dry
- Powerful heavy duty motor for industrial performance
- Provides maximum suction power for maximum pick-up

CV150C WET/DRY CONTAINMENT VACUUM		
Description	Part #	Cat #
CV150C Wet/Dry HEPA Vacuum	4244132	67285
Containment Bag for CV150C	2508578	69711
6 Mil Bag Liner (50 bags)	2506170	83300

SPECIFICATIONS		
Volts	120V	
Motor	1350 Watt / 8.2 Amp	
CFM	150 CFM	
Container Capacity	7.9 gallon (30L)	
Dimensions	17"L x 19W x 27H	
Hose Length	12 ft.	

CV258 VACUUMS





Dry Containment

HEPA FILTERS

CV258 Vacuums Electric

FEATURES:

- 2" hose diameter
- 2 motors
- Self-cleaning patented filtration system
- Hepa filters
- · Solid steel construction

SPECIFICATIONS

Power	120V, 2700 Watt
CFM	258 CFM
Filtration	Self-cleaning
Hose Length	32 ft.

CORE VAC CV258 DUST CONTAINMENT VACUUMS		
Description	Part #	Cat #
CV258LC Dust Control Vacuum (Can Style)	4244137	104364
CV258B Dust Control Vacuum (Bag Style)	4244131	83263
Bag, Continuous (plastic)	4600172	84935



Easy adjustment handle releases the bag and allows quick access for disposal (CV258B only)



CV353B Vacuum Electric

FEATURES:

- 2" hose diameter
- 3 motors
- Self-cleaning patented filtration system
- HEPA filters
- Solid steel construction

SPECIFICATIONS	
Volts	120V or 230V
Motor	27.6 amp or 19.5 amp
CFM	353 CFM
Dimensions	26"W x 26"L x 46"H
Hose Length	37 ft.

CORE VAC CV353B DUST CONTAINMENT VACUUM		
Description	Part #	Cat #
CV353B HEPA Vacuum 120V (Bag Style)	4244133	69970
CV353B HEPA Vacuum 230V (Bag Style)	4244134	105675
Bag, Continuous (plastic)	4600172	84935

Part of the Core Vac product line for dust removal



· Large back wheels and caster wheel for easy maneuverability

CV300S VACUUM (SOLD AS INDIVIDUAL ITEMS)		
Description	Part #	Cat #
CV300S Motor Head Only	2506969	106885
55 Gallon Drum with Drain	6049207	108453
Drum Cart with Wheels	6049206	108454
15ft. Hose	2505973	108455
30ft. Hose	2505974	108456
Vacuum Wand	2505970	108457
Wand Base	2505972	108459
Wand Squeegee	2505971	108460

CFM 300

Hose Length 15ft. (included with complete unit) or 30ft. (optional)

Part of the Core Vac product line for dust removal





✓ OSHA COMPLIANT with our First-Cut[™] System

All testing has been completed in a controlled environment using an air velocity meter and a mechanical gauge measured at the neck of each vacuum. These figures should be used as a reference only.

CORE VAC CVG1-PRO DUST CONTAINMENT VACUUM		
Description	Part #	Cat #
CVG1-PRO Honda gas vacuum for CC190PRO-EE with hoses	5801910	111653
Vacuum side cover plate attachment for CC190PRO-EE	2708358	80580
Vacuum adapter 3" to 5"	2504846	82102
HEPA Twin Filter	2508947	105768
6 Mil Bag Liner (50 bags) for CVG1	2506170	83300

CVG1-PRO VACUUM









SPECIFICATIONS		
Vacuum Hoses	5" x 15' standard with quick- release clamps	
	Two 5" 200lb rubber	
Wheels	Two 5" 200lb swivel caster	
CFM	1100	
Height	59" (150cm)	
Length	34-1/2" (88cm)	
Width	28" (71cm)	
Weight	375 lbs. (170kg)	



For Use on the CC190PRO-EE First-Cut[™] Early Entry Saws






HYDRAULIC PUMP INFO



HYDRAULIC POWER UNITS - FLOW VS. PRESSURE

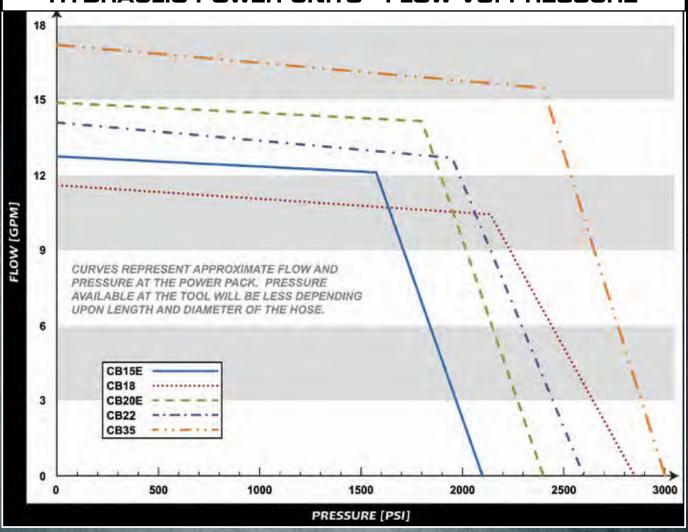

Hydraulic Pump Safety Information

- · Check hydraulic fluid level
- Confirm that hoses and fittings are secure
- · Make sure all hoses are connected for correct flow direction to and from the tool being used
- Do not inspect hoses and fitting for leaks by using bare hands
- Always wear personal protective equipment when running machinery



HYDRAULIC PUMP POWER UNITS

OP15EXL 0-12 CPM

CP18BVXL 0-10 GPM **Caselline**



Powered By:

BRIGGS STRATTON



- FEATURES: 15 HP electric motor
- Adjustable handles
- Large wheels for easy moving
- Heavy duty frame design
- Single lifting point
- Fully adjustable flow control
- Water-cooled

Powered By:

BALDOR

FEATURES:

- 18 HP Briggs-Vanguard gas engine
- Adjustable handles
- Large wheels for easy moving
- Heavy duty frame design
- Light weight and portable
- Single lifting point
- Fully adjustable flow control
- Air-cooled

CP15EXL SPECIFICATIONS

Hydraulic Flow	0-12 GPM
Relief Pressure	2100 psi
Hydraulic Tank Capacity	11 gallons
Flow Control	Fully adjustable
Hose	25' x 1/2" or 25' x 5/8"
Quick Disconnects	1/2" and 3/4"
Dimensions	48-1/2" L x 26-1/2" W x 39" H

CP18BVXL SPECIFICATIONS

Hydraulic Flow	0-10 GPM
Relief Pressure	2850 psi
Hydraulic Tank Capacity	5-1/2 gallons
Flow Control	Fully adjustable
Hose	25' x 1/2"
Quick Disconnects	1/2"
Dimensions	35-1/2" L x 23-1/2" W x 30" H

C	P1	5	EX	(L	ΕL	E,	C1	ΓR	IC	P	0	W	Æ	R	U	N	IT

Model #	Description	Part #	Cat#	Product Weight (lbs)			
CP15EXL (1/2")	15 HP 230V Baldor Electric Motor with 1/2" x 25' hose, 0-12 GPM	4250058A	10998	450			
CP15EXL (1/2")	15 HP 460V Baldor Electric Motor with 1/2" x 25' hose, 0-12 GPM	4250058B	10286	450			
CP15EXL (1/2")	15 HP 575V Baldor Electric Motor with 1/2" x 25' hose, 0-12 GPM	4250058C	73238	450			
CP15EXL (5/8")	15 HP 230V Baldor Electric Motor with 5/8" x 25' hose, 0-12 GPM	4250059A	13164	450			
CP15EXL (5/8")	15 HP 460V Baldor Electric Motor with 5/8" x 25' hose, 0-12 GPM	4250059B	20568	450			
CP15EXL (5/8")	15 HP 575V Baldor Electric Motor with 5/8" x 25' hose, 0-12 GPM	4250059C	14383	450			
	Tool Tray Option (for Electric Models)	4400262	25074	20			
Heavy Duty Whe	el Upgrade Kit (Qty 2) for CP15EXL, CP20EXL, CP22HXL, CP35BVXL	4641172	99434	10			
CB18BVXL GAS POWER UNIT							
CP18BVXL (1/2") 18 HP Briggs-Vanguard with 1/2" x 25' hose, 0-10 GPM		4250067	34017	350			
	Heavy Duty Wheel Upgrade Kit (Qty 2) for CP18BVXL	4641173	72444	10			

HYDRAULIC Power Units

HYDRAULIC PUMP POWER UNITS







Shown with Optional Tool Tray

Powered By:

HONDA ENGINES



- 20 HP electric motor
- Adjustable handles
- · Large wheels for easy moving
- Heavy duty frame design
- · Single lifting point
- Fully adjustable flow control
- · Water-cooled

Powered By:

- 22.1 HP Honda GX660 gas engine
- Heavy duty frame design
- Adjustable handles
- · Single lifting point
- · Large wheels for easy moving
- Fully adjustable flow control
- · Water-cooled

CP20EXL SPECIFICATIONS

PRODUCTS

BALDOR

Hydraulic Flow	0-15 GPM		
Relief Pressure	2400 psi		
Hydraulic Tank Capacity	11 gallons		
Flow Control	Fully adjustable		
Hose	25' x 5/8"		
Quick Disconnects	1/2" and 3/4"		
Dimensions	48-1/2" L x 26-1/2" W x 39" H		

CP22HXL SPECIFICATIONS

Hydraulic Flow	0-14 GPM
Relief Pressure	2600 psi
Hydraulic Tank Capacity	11 gallons
Flow Control	Fully adjustable
Hose	25' x 1/2" or 25' x 5/8"
Quick Disconnects	1/2" and 3/4"
Dimensions	48-1/2" L x 26-1/2" W x 39" H
Cooler Option Part #	4400267
Gas Fuel Tank Capacity	4.4 gallons

CP20EXL ELECTRIC POWER UNIT								
Model #	Description	Part #	Cat#	Product Weight (lbs)				
CP20EXL (5/8")	20 HP 230V Baldor Electric with 5/8"x 25' hose, 0-15 GPM	4220029A	43370	550				
CP20EXL (5/8")	20 HP 460V Baldor Electric with 5/8"x 25' hose, 0-15 GPM	4220029B	03082	550				
CP20EXL (5/8")	20 HP 575V Baldor Electric with 5/8"x 25' hose, 0-15 GPM	4220029C	03085	550				
	Tool Tray Option (for Electric Models)	4400262	25074	20				
	CP22HXL GAS POWE	R UNIT						
CP22HXL (1/2")	22.1 HP Honda GX690 with 1/2" x 25' hose, 0-14 GPM	4250063	78503	450				
CP22HXL (5/8")	22.1 HP Honda GX690 with 5/8" x 25' hose, 0-14 GPM	4250064	35571	450				
Catal	ytic Muffler for 22.1HP Honda, high mount right side	2702624	25901	25				
	Oil to air cooler	4400267	42968	20				
	Tool Tray Option (for Gas Models)	4400261	30005	20				
Heavy Duty Wheel U	pgrade Kit (Qty 2) for CP15EXL, CP20EXL, CP22HXL, CP35BVXL	4641172	99434	10				



HYDRAULIC PUMP POWER UNITS

Powered By:

BRIGGS STRATTON

GPESSYXL 0-17 CPM

GPEEKXL 0-18 CPM



FEATURESH

- 35 HP Briggs-Vanguard gas engine
- Heavy duty frame design
- Adjustable handles
- Single lifting point
- Two large wheels for easy moving
- Fully adjustable flow control
- Water-cooled

CP35BVXL SPECIFICATIONS

Hydraulic Flow	0-17 GPM
Relief Pressure	3000 psi
Hydraulic Tank Capacity	11 gallons
Flow Control	Fully adjustable
Hose	25' x 5/8" or 1/2"
Quick Disconnects	1/2" and 3/4"
Dimensions	49" L x 26-1/2" W x 39" H
Gas Fuel Tank Capacity	4.4 gallons

FEATURES:

- 38 HP Kohler EFI gas engine
- Heavy duty frame design
- Adjustable handles
- Single lifting point
- Heavy duty wheels standard Fully adjustable flow control
- · Water-cooled

CP38KXL SPECIFICATIONS

Powered By:

KOHLER

Hydraulic Flow	0-16 GPM
Relief Pressure	3000 psi
Hydraulic Tank Capacity	11 gallons
Flow Control	Fully adjustable
Hose	25' x 5/8"
Quick Disconnects	1/2" and 3/4"
Dimensions	52.3" L x 26.9" W x 40" H
Gas Fuel Tank Capacity	4.4 gallons

CP35BVXL GAS POWER UNIT								
Model #	Part #	Cat#	Product Weight (lbs)					
CP35BVXL (5/8")	35 HP Briggs-Vanguard gas engine (993cc) with 5/8" x 25' hose	4220028	03109	596				
CP35BVXL (1/2")	35 HP Briggs-Vanguard gas engine (993cc) with 1/2" x 25' hose	4220035	18537	596				
CP35BVXL (no hose)	4250071	99447	550					
	Oil to air cooler option for CP35BVXL	4400298	81268	40				
Cataly	tic Muffler for 35HP Briggs Vanguard gas engine	2707355	29029	20				
	Tool Tray Option (for Gas Models)	4400261	30005	20				
Heavy Duty Wheel Upg	rade Kit (Qty 2) for CP15EXL, CP20EXL, CP21HXL, CP35BVXL	4641172	99434	10				
	CP38KXL GAS POWE	R UNIT						
CP38KXL (5/8")	38 HP Kohler Command EFI gas engine with 5/8" x 25' hose	4241171	103921	550				
CP38KXL (1/2") 38 HP Kohler Command EFI gas engine with 1/2" x 25' hose		4241174	108204	550				
CP38KXL (no hose) 38 HP Kohler Command EFI gas engine with no hose		4241175	108205	535				
	Air to Oil Cooler	4400307	108136	42				
_	Tool Tray Option (for Gas Models)	4400261	30005	20				

HYDRAULIC PUMP POWER UNITS CP30EXL CP40EXL 0-20 GPM 0-23 CPM Electric

FEATURES:

- 30HP electric motor
- · Heavy duty frame design
- Single lifting point
- · Large wheels for easy moving
- Water-cooled

Powered By:



FEATURES: • 40HP electric motor

- Heavy duty frame design
- Four heavy duty wheels for easy moving
- Four lifting points
- Fully adjustable flow control
- Water-cooled

CP30EXL SPECIFICATIONS

Hydraulic Flow	0-20 GPM
Relief Pressure	2500 psi
Hydraulic Tank Capacity	23 gallons
Flow Control	Fully adjustable
Hose	60' x 3/4"
Quick Disconnects	3/4"
Dimensions	53-1/2" L x 26-1/2" W x 39" H

CP40EXL SPECIFICATIONS

Hydraulic Flow	0-20 GPM (H.P.) 0-28 GPM
Relief Pressure	3600 psi (H.P.) 2500 psi
Hydraulic Tank Capacity	23 gallons
Flow Control	Fully adjustable
Hose	60' x 3/4"
Quick Disconnects	3/4"
Dimensions	57" L x 32-1/4" W x 58" H

CP30EXL ELECTRIC POWER UNITS					
Model #	Description	Part #	Cat#	Product Weight (lbs)	
CP30EXL (3/4")	30 HP Leeson Electric motor with 3/4" x 60' hose, 0-20 GPM, 230V w/starter box	4250050A	04487	700	
CP30EXL (3/4")	30 HP Leeson Electric motor with 3/4" x 60' hose, 0-20 GPM, 460V w/starter box	4250050B	09534	700	
CP30EXL (3/4")	30 HP Leeson Electric motor with 3/4" x 60' hose, 0-20 GPM, 575V w/starter box	4250050C	04263	700	
CP40EXL ELECTRIC POWER UNIT					
CP40EXL H.P. (3/4")	40 HP Electric motor with 3/4" x 60' hose, 0-28 GPM, 460V w/starter box	4250053	85392	1,300	
CP40EXL (3/4")	40 HP Electric motor with 3/4" x 60' hose, 0-28 GPM, 460V w/starter box	4250052	48597	1,300	



Power Generator and Hydraulic Pump All-In-One Unit!





Powered By:

JCB

32 GPM 480V-240V-120V Electric

Diesel

FEATURES:

HYDRA-GEN

- 173HP JCB Ecomax Tier 4 Final Diesel Engine
- Auxilliary driven direct drive hydraulic pump that eliminates belts, sheaves, bearing supports and more
- 85KVA Generator with adjustable voltage regulation and 100 amp main service
- True dual circuit unit with total capacity of 32 GPM and 3000 PSI
- Single to use wireless controls or can be operated at the controller
- Integrated 50 gallon fuel tank
- Water-proof Hubbell electrical receptacles

CPHG173-85 HYDRA-GEN POWER UNIT				
Description Part # Cat # Product W. (lbs.)				
CPHG173-85 Hydra-Gen Power Unit	4250312	65403	4,620	
CPHG173-85 Hydra-Gen Power Unit - Open version	4250313	68432	3,930	
50' hose set (2) with valve and quick disconnects	CC-50-HH	85202	55	
100' hose set (2) with valve and quick disconnects	CC-100-HH	85203	110	
50' 6/4 cord with plugs	CC-50-EC	85204	50	
100' 6/4 cord with plugs	CC-100-EC	85205	100	

Engine 173HP JCB Diesel Ecomax Tier 4 Final

Electrical 480V 3Ø 70A, 240V 1Ø 30A, 120V 1Ø 30A & 20A

Hydraulics 32 GPM and 3000 PSI

Dimensions

Length: 82", Width: 42", Height: 72", Weight:



FEATURES:

- Dedicated 70KW generator
- Tier 4 Final Kohler 134HP diesel engine
- Sinple start/run control

- Adjustable voltage regulator
- Integrated DEF tank

CPSK-70 SPECIFICATIONS

Engine	134HP Kohler Diesel Tier 4 Final
Electrical	480V 3Ø 70A, 240V 1Ø 30A, 120V 1Ø 30A & 20A
Dimensions	Length: 90", Width:44", Height: 56", Weight: 2900 lbs.

CPSK-45 SPECIFICATIONS

Engine	70HP Kohler Diesel Tier 4 Final
Electrical	480V 3Ø 70A, 240V 1Ø 30A, 120V 1Ø 30A & 20A
Dimensions	Length: 72", Width: 44", Height: 66", Weight: 2500 lbs.

CPSK-70 & CPSK-45 OPEN GENERATOR UNITS				
Description	Part #	Cat #	Product Weight (lbs.)	
CPSK-70 Generator Set 70kW (for Custom Utility Trucks)	4250310	58890	2900	
CPSK-45 Generator Set 45kW (for Custom Utility Trucks)	4250311	100941	2500	



23 **GPM** Gasoline


FEATURES:

- Simple operation and easy to use
- 2500 PSI for versatility that can power many different machines
- Electronically controlled valve bank for ON/OFF & flow control
- Low maintenance external screw on hydraulic filter
- Electronically fuel injected gasoline Kubota engine

POWER THESE MACHINES: • Hydraulic Hand Saws

- **Wall Saws**
- **Wire Saws**
- **Hydraulic Core Rigs**

CP54GK POWER UNIT					
Model #	Engine Make	Engine Power	Power Source	Part #	Cat #
CP54GK	Kubota	54 HP	Gasoline	5801456	109253

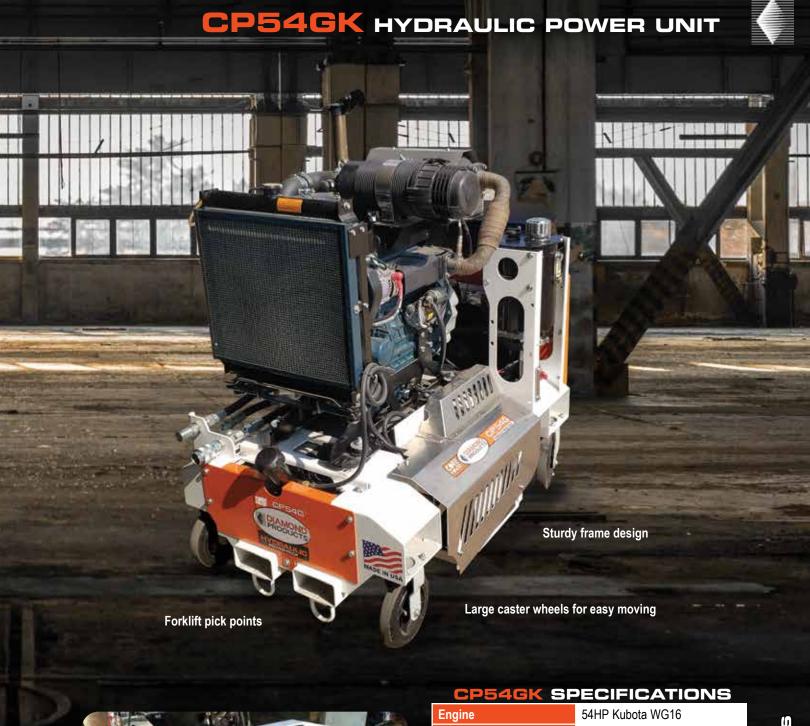



4.3" digital screen for electronic controls

Engine	54HP Kubota WG16
Hydraulics	Danfoss
Controls	4.3" HMI Display
Oil Cooling	12V Electric Fan HOC
Connections	3/4" Q.D.
Reservoir	2.5 Gallon
Length	49"
Width	32"
Height	52"
Weight	1,160 lbs.

Includes set of 60' hoses with 3/4" quick disconnects



- Fully Adjustable 1-35 Gallon per Minute Hydraulic Flow Rate
- Completely enclosed, self contained design
- Integrated safety features including warnings and shutdown commands to protect power pack including:
- Low Hydraulic Fluid Indicator
- Hydraulic Fluid Over Temperature Indicator
- Clogged or Dirty Hydraulic Filter Indicator
- Standard Engine Controls (Low Oil Pressure, Coolant Over Temperature, ETC)

CP74D SPECIFICATIONS

Engine	Deutz TD2.9L4 Tier 4 Final, Liquid- Cooled Turbo Charged Common Rail
Max GPM	35 GPM
Max PSI	3,000 psi
Flow/Pressure Control	Fully adjustable
Hydraulic Tank Capacity	44 gallons
Diesel Fuel Tank Capacity	17 gallons
Dimensions	74" L x 30" W x 60" H
Weight	2,200 lbs. (Including fluid)

Local or Remote Operations, Via Wireless Controller

- Murphy PV450 Color Display digitally indicated all necessary engine information, hydraulic system information and maintenance information.
- Kar-Tech Wireless Control System, with 2 Line MEGA Series Remote Display that indicates System Pressure and Hydraulic Flow, allows for flow and pressure adjustments, hydraulic function ON/ OFF, and Emergency Stop.
- Charges Directly off the Power unit via the incorporated docking station/charger.

CP74D POWER UNIT					
Model #	Engine Make	Engine Power	Power Source	Part #	Cat #
CP74D	Deutz TD2.9L4	74 HP	Diesel	5801545	60687



FEATURES:

- Towable dual independent circuit hydraulic power pack
- 74 HP Kohler Diesel Tier 4 Final engine
- No regeneration / DEF system
- ECU controlled hydraulic circuit with built in safety controls to protect from overheating and low fluid levels
- All LED lighting, redesigned fuel fill and large fuel tank
- Hannay power reels with 100' pressure and return hose for primary circuit included

CP74DDC SPECIFICATIONS

Engine	Kohler 74HP Tier 4 Final
Max GPM	32 GPM
Max PSI	3,000 psi
Flow/Pressure Control	Fully adjustable
Hydraulic Tank Capacity	39 gallons
Diesel Fuel Tank Capacity	27 gallons
Hose	100' x 3/4" pressure & 100' x 1.00" return
Dimensions	156"L x 84"W x 63"H, 3,350 lbs.
Reels	Hannay Brand power rewind

CP74DDC POWER UNIT					
Model #	Engine Make	Engine Power	Power Source	Part #	Cat #
CP74DDC	Kohler	74 HP	Diesel	5801450	48079



CUSTOM UTILITY TRUCKS

Made the Way You Want with Your Jobs in Mind



Call for the latest truck pricing and information 800-321-5336



Hydra-Gen Power Unit 173HP JCB Ecomax Tier 4 Final Diesel Engine

Hydra-Gen Power Unit			
Description	Part #	Cat #	
Enclosed Hydra-Gen*	4250312	65403	
Open Hydra-Gen	4250313	68432	
CPSK-45 - 45kW Electric Only Generator Set with 70 HP Kohler Diesel *	4250311	100941	
CPSK-70 - 70kW Electric Only Generator Set with 70 HP Kohler Diesel*	4250310	58890	

*Includes a fuel tank. All others require a truck-mounted fuel tank.



Power Reel Rack for Electric Trucks

Includes 200' of 6/4 cord 200' of 10/3 cord and 200' of 1/2" water hose

Electric Power Reel Rack		
Part #	Cat #	
6071091	100125	



Side graphic not included



Blade Rack
Up to 54" capacity

Blade Rack		
Part #	Cat #	
6075081	04701	

CUSTOM UTILITY TRUCKS



Core Bit Rack		
Part #	Cat #	
6075078	04698	



3 Level Shelf Unit		
Part #	Cat #	
6075073	04693	



Plastic Water Tank

· 175 gallons · 3/8" thick plastic, 10" fill cap · 52" tall x 36" deep x 22" wide *Plumbing not included We offer 10 gauge steel water tanks, powder coated inside and outside built to your specs in any size and shape!

Plastic Water Tank (Single)			
Part #	Cat #		
2506323	04689		
Water Tank Assembly (Dual)			
6070214	85677		



Wall Saw Track Holder

Right Side			
Part #	Cat #		
6075079	04699		
Left Side			
6075080	04700		

Blade Guard Holders Right Side Part# Cat#

6075075	04695		
Left Side			
6075076 04696			



Power Hose Reel

For two 100' x 3/4" hoses 22" wide x 36" long x 36" tall

Power Hose Reel		
Part #	Cat #	
2506351	04703	

Sliding Water
Pump Mount

6040605 53413

110-220 Volt
Single Phase

2600868 67727



Ventilation Fan

· Installed in the top of the truck box· Ventilation for heat and fumes

vendiación Fan			
Part #	Cat #		
2506353	04690		
Honda Pump with Plumbing			
Part #	Cat #		
HWP-CL	86660		

Water	Pumps
Multiple options for	water numns

Truck Opti	ions					
Description	Part #	Cat #				
Truck mounted 50 gallon auxiliary fuel tank mounted on truck frame	2503605	91723				
Plastic water tank 3/8" thick with baffles	2506323	04689				
2 steel water tanks, 165 gallons each, powder coated (330 gallon total)	2-WT-388	86268				
Hose stop	2502157	69299				
3/4" roller set for reel	2506280	69319				
Power reel rack-holds 3 reels	6075072	04692				
Power reel w/200' 6/4 cord and 50amp plug	ECR200P	86272				
Saw tie downs (each) lashing ring- 2 per saw	2503320	86658				
100' of 6/4 SO cord with 50amp plugs	CC-100-EC	85205				
Hook rack	6040421	99988				
Wall saw holder	6045001	18703				
1/2" water hose	3201312	91718				
Hand saw holder	6075077	04697				
Hammer/pry bar holder	6075091	06139				

Power Reels - Loaded							
Description	Part #	Cat #					
Hydraulic hose reel, narrow, (2) 3/4" x 100' hoses w/3/4" quick disconnects	6070710	75906					
Electric cord reel with 200' 6/4 electric cord & plug for 480V 3-phase	6070877	102262					
Water hose reel with 200' 1/2" water hose	6070683	75909					
Hydraulic hose reel, (1) 1/2" x 100' & (1) 5/8" x 100' w/1/2" quick disconnects	6070876	102263					
10/3 power reel assembly w/200' cord & plug 120V	6070600	63126					

Power Reels - Unloaded						
Description	Part #	Cat #				
Hydraulic hose reel, dual narrow, (2) 3/4"	2506351	04703				
Electric cord reel 6/4, 3-phase	2506273	64947				
Water hose reel	2503414	91721				
Hydraulic hose reel, dual wide, (2) 1/2"	2502581	91720				
Electric cord reel 10/3 1-phase	2503178	21063				




ABRASIVES SAFETY INFORMATION

These are general warnings and safety information. Please consult literature and packaging information before using abrasive products.

Handle Grinding Wheels Safety

Safety is everyone's business in both the application and care of grinding wheels. Wheels improperly used may not only be breakable-they can be dangerous. Grinding wheel operation must always be in strict compliance with the American National Standards Institute (ANSI) B7.1 Safety Requirements and the Occupational Safety and Health Act which regulates speed; safety guards; flanges; mounting procedures; general operating rules; handling, storage and inspection; and general machine conditions.

WARNING!!!



IMPROPER USE MAY CAUSE GRINDING WHEEL BREAKAGE AND SERIOUS INJURY.

CAUTION: Comply with American National Standards Institute Code B7.7, Occupational Safety and Health Act and Safety Guide with Packaging.


DON'T OVERSPEED, ABUSE, OR DROP
WHEEL ALWAYS USE A GUARD, PERSONAL PROTECTIVE
EQUIPMENT AND PROPER MOUNTING PROCEDURES.

DO:

- 1. DO always HANDLE AND STORE wheels in a careful manner.
- 2. DO VISUALLY INSPECT all wheels for possible damage before mounting.
- DO MAKE SURE MACHINE SPEED does not exceed MAXIMUM OPERATING SPEED marked on wheel or its container.
- DO CHECK MOUNTING FLANGES for equal size, relieved as required and correct diameter. (Should be at least 1/3 diameter of the wheel.)
- 5. DO USE MOUNTING BLOTTERS supplied with wheels.
- 6. DO be sure WORK REST is properly adjusted on bench and floor stand grinders. (Should be center of wheel or above and no more than 1/8" away from wheel.)
- DO always USE A PROPERLY DESIGNED SAFETY GUARD covering at least on half of the grinding wheel.
- 8. DO allow WHEELS to run at operating speed, with guard in place, for at least one minute before grinding.
- 9. DO always WEAR SAFETY GLASSES or equivalent proper eye protection when grinding.
- DO TURN OFF COOLANT before stopping wheel to avoid creating an out-of-balance condition.
- 11. DO make sure work is held FIRMLY in place. CLAMP work when using non-reinforced cut-off wheels.
- DO CHECK THE SPEED OF THE GRINDER as recommended in ANSI B7.1 Safety Requirements.

WARNING!!!

AIRBORNE PARTICULATES AND FUMES GENERATED BY THE GRINDING PROCESS MAY CAUSE INJURY TO THE EYES AND SKIN AND SERIOUS RESPIRATORY ILLNESS.



These airborne concentrations are produced by the material being ground, the coolant and the grinding wheel. Consult the MATERIAL SAFETY DATA SHEETS for each material involved in the process. Always use adequate ventilation, dust control and NIOSH and MSHA approved personal protective equipment appropriate for the grinding process involved.

DON'T:

- 1. DON'T use a wheel that HAS BEEN DROPPED or DAMAGED or appears to have been abused.
- DON'T FORCE a wheel onto the machine OR ALTER the size of the mounting hole-if wheel won't fit the machine, get one that will.
- 3. DON'T ever EXCEED MAXIMUM OPERATING SPEED established for the wheel.
- DON'T use mounting flanges on which the bearing surfaces ARE NOT CLEAN, FLAT AND FREE FROM BURRS.
- 5. DON'T TIGHTEN the mounting nut EXCESSIVELY.
- DON'T grind on the SIDE OF THE WHEEL unless wheel is specifically designed for that purpose.
 (See the current ANSI B7.1 Safety Requirements for exceptions.)
- 7. DON'T start the machine until the WHEEL GUARD IS IN PLACE.
- DON'T STAND DIRECTLY IN FRONT of a grinding wheel whenever a grinder is started.
- 9. DON'T grind without proper ventilation and personal protective equipment. (See ANSI B7.1)
- 10. DON'T grind material for which the WHEEL IS NOT DESIGNED.
- DON'T JAM work into the wheel. NEVER JAM, TWIST, BEND OR TILT a cult-off wheel when cutting.
- 12. DON'T GRIND with a machine that vibrates excessively.



For all cross sections

Cutting & **Grinding**

90°









SIZE	Specification	Max Safe RPM	Part #	Cat #	Unit Pkg. Qty.
4" x 1/8" x 3/8"	A30S-BF	15270	34301902	92401	10
4" x 1/8" x 5/8"	A30S-BF	15270	34301904	62999	10
4-1/2" x 1/8" x 7/8"	A30S-BF	13280	34301921	36885	10
4-1/2" x 1/8"x 5/8"-11	A30S-BF	13280	34301910	47621	5
5" x 1/8" x 7/8"	A30S-BF	12220	34301938	92402	10
5" x 1/8" x 5/8"-11	A30S-BF	12220	34312946	92403	5
7" x 1/8" x 7/8"	A30S-BF	8600	34301955	92438	10
7" x 1/8" x 5/8"-11	A30S-BF	8600	34301954	62992	5
9" x 1/8" x 7/8"	A30S-BF	6640	34301968	86495	10
9" x 1/8" x 5/8"-11	A30S-BF	6640	34301966	92439	5



Tyrolit PREMIUM Pipeliner Plus Wheels for Steel & Cast Materials

High quality zirconia alumina grain

High performance, aggressive, fast cutting, light grinding and

Designed specifically for the pipeline industry For the most demanding applications Designed for both steel and stainless




Right Angle Grinder




90° Right Angle Grinder









Reusable Metal Adapter Flanges for Dish Wheels					
Type	Spec	Part #	Cat #		
Adapter	SF113	20007845	59242		
Nut	S113	20007890	59602		

Reusable Metal Adapter Flanges

All 7" and 9" raised hub dish wheels, except those with ready mount adapters, require mounting with properly designed adapter flanges.



More Comfort, Less Stress.TYROLIT Comfort Start.




Comfort Start Edge

With innovative Comfort Start technology, we bring our grinding expertise into your everyday working life. Users of our PREMIUM rough grinding wheels have been enjoying the advantages of the TYROLIT Comfort Start edge since 2014. Now, all BASIC grinding wheels are now also available with Comfort Start technology for comfortable, safe working in any situation. Innovative TYROLIT Comfort Start technology is available on all .250" thick grinding wheels.

With Comfort Start, we present innovative technology that aims to significantly improve comfort for all grinding applications. The specially bevelled edge prevents the tool from plunging in when you start grinding. This saves the workpiece from irreparable damage and completely eliminates the need for time-consuming reworking.




The Comfort Start beveled edge reduces the vibration that causes uneven grinding from the start and gives you a smooth finish.





Tyrolit BASIC Wheels for Concrete & Masonry



 General purpose wheel for rough grinding of concrete, masonry and stone


Very good stock removal rates and wheel life









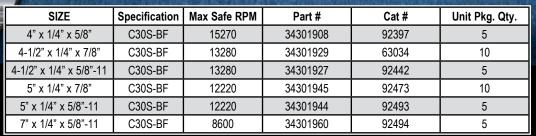

Tyrolit BASIC Wheels for Steel

· Aluminum oxide grain

SIZE

9" x 1/4" x 5/8"-11

- · General purpose wheel for ferrous metals; surface or edge grinding
- · Very good stock removal rates and wheel life

Specification

A30Q-BF



Grinder

Cat #

30° COMFORT START

Unit Pkg. Qty.

10

10

10

10

5

10

5

10

5


10

5

10

5



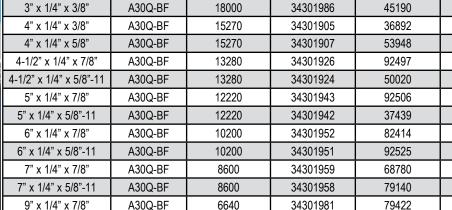

6640

Max Safe RPM

Part #

34301970



CYROLIT



- Aluminum oxide grain
- High performance rough grinding wheels designed especially for steel and stainless steel
- Excellent stock removal rates and exceptional wheel life
- Contaminate-free iron/sulfur and chlorine, <0.1%



92528

30° Right Angle Grinder





Type 27

SIZE	Specification	Max Safe RPM	Part #	Cat #	Unit Pkg. Qty.
5" x 1/4" x 7/8"	A24Q-BFX	12220	34251163	58216	10
9" x 1/4" x 5/8"-11	A24Q-BFX	6640	34251269	51624	5





Tyrolit BASIC High Performance Zirconia Wheels for Steel & Cast Materials

- · Zirconia alumina grain
- High performance grinding wheel for the most demanding applications
- Highest stock removal rates and ultimate wheel life
- Designed for ferrous metals, stainless steel and cast materials









MADLID

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4" x 1/4" x 3/8"	ZA30BF	15270	34337104	92128	10
4-1/2" x 1/4" x 7/8"	ZA30BF	13280	34301936	92755	10
4-1/2" x 1/4" x 5/8"-11	ZA30BF	13280	34301934	92851	5
7" x 1/4" x 7/8"	ZA30BF	8600	34301964	92153	10
7" x 1/4" x 5/8"-11	ZA30BF	8600	34301962	48463	5
9" x 1/4" x 7/8"	ZA30BF	6640	34301984	79650	10
9" x 1/4" x 5/8"-11	ZA30BF	6640	34301983	47624	5



- Zirconia alumina grain
- High performance grinding wheel for the most demanding applications Very good stock removal rates and wheel life
- Type 28 saucer shape provides greater surface area coverage and provides the operator with better grinding visibility



Grinder







SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
7" x 1/4" x 7/8"	C30S-BF	8600	34302022	93135	10
7" x 1/4" x 5/8"-11	C30S-BF	8600	34302021	47631	5
9" x 1/4" x 7/8"	C30S-BF	6640	34337108	47329	10
9" x 1/4" x 5/8"-11	C30S-BF	6640	34302024	36884	5

Type 28







Tyrolit BASIC Wheels for INOX, Steel & Stainless Steel

- Aluminum oxide grain
- · General purpose wheel for cutting INOX, steel and stainless steel
- · Good cutting rates and wheel life
- Excellent price/performance ratio
- Contaminate-free of iron, sulfur and chlorine, <0.1%



Right Angle Grinder

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4-1/2" x .040 x 7/8"	WA60BF	13280	34331624	93214	25





Type 27



Tyrolit BASIC Wheels for INOX, Steel & Stainless Steel

- · Aluminum oxide grain
- General purpose wheel for cutting INOX, steel and stainless steel
- For cutting thin-wall metal sheets, profiles and tubes
- Good cutting rates and wheel life
- Excellent price/performance ratio
- Contaminate-free of iron, sulfur and chlorine, <0.1%



90°

Right Angle Grinder



SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4-1/2" x .040 x 7/8"	A60Q-BF	13280	396110	47413	25
4-1/2" x .060 x 7/8"	A46Q	13280	34332872	100577	25
5" x .040 x 7/8"	A60Q	12220	34162827	47553	25
6" x .045 x 7/8"	A46Q	10200	34331611	44552	25

Type 1



Tyrolit BASIC 2 in 1 Wheels for Steel & Stainless Steel

- Premium aluminum oxide grain
- · Aggressive, fast cutting wheels for steel and stainless steel
- · Very good wheel life
- Contaminate-free of iron, sulfur, chlorine, <0.1%



90°

Right Angle Grinder

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4" x .040 x 5/8"	A60Q-BF	15270	34163027	75612	25
4-1/2" x .040 x 7/8"	A60Q-BFXA	13280	34162818	54078	25
4-1/2" x .060 x 7/8"	A60Q-BFXA	13280	34162820	51002	25
5" x .040 x 7/8"	A60Q-BFXA	12220	34162819	57419	25
6" x .045 x 7/8"	A46Q-BFXA	10200	34331319	39135	25
6" x .060 x 7/8"	A46Q-BFXA	10200	34162823	47582	25
7' x .060 x 7/8"	A46Q-BFXA	8600	34162825	48490	25
9" x .075 x 7/8"	A46Q-BFXA	6640	34331346	50168	25

Type 1

SUPER-THIN CUT-OFF WHEELS







High performance cut-off wheels designed especially for steel Hard "S" bond provides exceptionally long life



Right Angle Grinder

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4-1/2" x .040 x 7/8"	A60S-BFKA	13280	34163158	41769	25
4-1/2" x .060 x 7/8"	A46S-BFKA	13280	34163160	41787	25
5" x .040 x 7/8"	A60S-BFKA	12220	34163159	67659	25

Type 1

TROUD



Aluminum oxide grain


Ultimate performance characteristics in cutting material made

of rust and acid resistant steels

Contaminate-free of iron, sulfur and chlorine, <0.1%



Right Angle Grinder



Type 1



Tyrolit PREMIUM Super Thin Cutting Wheels for Aluminum & Stone

High performance cut-off wheels especially for aluminum, concrete and stone

Fast cutting times on aluminum, bronze, aluminum alloys, copper, brass, nickel, and titanium.

Also suitable for cutting masonry materials

Consistent free cutting wheel utilizing a non-loading bond.

90°

Right Angle Grinder

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4-1/2" x .040 x 7/8"	C46S-BFXA	13280	34332827	52551	25

Type 1



CUT-OFF WHEELS



Tyrolit BASIC Small Diameter Cut-Off Wheels for Steel and Cast Materials

Aluminum oxide grain
General purpose cutting wheel for all metals
Side reinforced for increased life
For cutting thinwall material and deburring

A36 for fast cutting on rough applications A60 for smooth, burr-free cuts





SIZE	Max RPM	Coarse A36TBF Part #	Coarse A36TBF Cat #	Pkg Qty
3" x 1/16" x 1/4"	25,000	34312842	50038	40
3" x 1/16" x 3/8"	25,000	34312843	93298	40
3" x 3/32" x 1/4"	25,000	34312844	79373	25
4" x 1/16" x 5/8"	19,100	34312857	79401	40
4" x 1/8" x 3/8"	19,100	34312859	93367	25

1/4" Metal Adapter					
Part #	Cat #				
20010606	70030				
3/8" Metal Adapter					
Part #	Cat #				

70031

20010607

SIZE	Max RPM	Med/Fine A60TBF Part #	Med/Fine A60TBF Cat #	Pkg Qty
3" x 1/16" x 3/8"	25,000	34312888	44557	40
3" x 3/32" x 3/8"	25,000	34312892	93813	50
3" x 1/8" x 3/8"	25,000	34312895	93814	50
4" x 1/16" x 1/4"	19,100	34312904	93815	100
4" x 1/16" x 3/8"	19,100	34312905	47628	100



Tyrolit BASIC Portable Electric Saw Wheels for Steel

· Aluminum oxide grain

7" x 1/8" x 5/8"

Designed for cutting all ferrous metals (or masonry, concrete option) with portable circular saws

8600

Ge

A30S-BF

Inte

	e wheel with good and knockout ada				Circular S
SIZF	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qtv.

34301855

93818



Type 1





Type 1

Tyrolit BASIC Chop Saw Wheels for Steel

- Single Reinforced-General Purpose-fast, burr-free cuts in metal and cutting steel studs, rebar and lighter gauge metals
- Double Reinforced-Premium-Suited for cutting steel studs
- Also good for rebar and lighter gauge metals. Fast cutting and very good wheel life



Electric

25

Single Reinforced-General Purpose							
SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.		
12" x 7/64" x 1"	A36BF	5100	34301875	93857	10		
14" x 7/64" x 1"	A36BF	4400	34301893	93890	10		
Double Reinforced-Premium							
12" x 3/32" x 1"	A36BF	5100	34301872	37503	10		
14" x 3/32" x 1"	A36BF	4400	34301891	79442	10		

CUT-OFF WHEELS





Tyrolit BASIC Stationary Cut-Off Wheels for Steel

- Aluminum oxide grain
- · General purpose cut-off wheels designed for higher horsepower stationary cut-off machines
- · Designed to make straight cuts in structural steel, solids, pipe and tubing



Stationary Cut-Off Saws

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
14" x 1/8" x 1"	A30S-BF	4400	34301892	94078	10
16" x 5/32" x 1"	A30S-BF	3850	34301898	88583	10
20" x 5/32" x 1"	A30S-BF	3100	34301900	47021	10





Type 1

Tyrolit BASIC Cold & Hot Pressed Walk Behind Wheels for Concrete

- · Silicon carbide grain-designed for cutting concrete, masonry, brick on all low HP walk-behind machines
- · Fast cutting and good life with triple reinforcement for added safety
- · Hot pressed wheels combine fast cutting action with extremely long life
- The hot press process enhances wheel life and strength-use on <18HP
- · Suitable for concrete, green concrete and asphalt



Walk Behind Saws

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
14" x 3/16" x 1"	A30-BF	4400	34312948	45186	10
14" x 1/4" x 1"	СР	4400	34312831	89323	5







Type 1



HIGH SPEED CUT-OFF WHEELS

Tyrolit BASIC Heavy Duty High Speed Gas & Portable Saw Wheels for Steel



· Designed for all ferrous metals

Specification

A30BF

A30BF

A30BF

· A free cutting wheel with exceptional cut rate and very good life

Max RPM

5500

5500

5100

Part #

34169155

34169156

34169157

· Triple-reinforced for stability and safety



High Speed Gas & Portable

5aws					
Cat #	Unit Pkg. Qty.	٩			
53056	10				
51567	10				

10

65475



SIZE

12" x 1/8" x UNV

14" x 1/8" x UNV



Tyrolit BASIC Heavy Duty High Speed Gas & Portable Saw Wheels for Ductile/Cast Iron & Asphalt

- · Aluminum oxide/silicon carbide blend
- Designed for ductile pipe, asphalt and cast iron
- · Exceptional cut rate and life
- Triple-reinforced for stability and safety




High Speed Gas & Portable Saws

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
12" x 1/8" x UNV	AC30BF	5500	34169183	65482	10
14" x 1/8" x UNV	AC30BF	5500	34169184	51568	10
16" x 1/8" x UNV	AC30BF	5100	34169185	65483	10





Type 1



- · Silicon carbide grain
- · Designed for cutting concrete, masonry, stone, brick and PVC pipe
- · Exceptional cut rate and very long life
- · Triple-reinforced for stability and safety



High Speed Gas & Portable Saws

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
12" x 1/8" x UNV	C30BF	5500	34169159	65485	10
14" x 1/8" x UNV	C30BF	5500	34169160	51573	10
16" x 1/8" x UNV	C30BF	5100	34169182	65493	10





Type 1

UNV **Universal Arbor** (1" & 20mm)

HIGH SPEED CUT-OFF WHEELS



Tyrolit PREMIUM High Speed Gas & Electric Saw Wheels for Steel

- · Premium aluminum oxide grain
- When increased productivity is required in cutting all ferrous metals, structural steels, rebar and metal decking.



· Superior cut rate and wheel life



High Speed
Gas & Portable
Saws

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
12" x 1/8" x 1"	A30P/100	5100	20010511	64192	10
12" x 1/8" x 20mm	A30P/100	5100	20010520	64193	10
14" x 1/8" x 1"	A30P/100	4400	20010509	64194	10
14" x 1/8" x 20mm	A30P/100	4400	20010510	64195	10





- · Premium aluminum oxide/silicon carbide grain
- When increased productivity is required in cutting ductile pipe, cast iron and asphalt
- · Superior cut rate and wheel life



High Speed Gas & Portable Saws

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
12" x 1/8" x 1"	AC24/100	5100	20010513	64196	10
12" x 1/8" x 20mm	AC24/100	5100	20010514	64197	10
14" x 1/8" x 1"	AC24/100	4400	20010515	64198	10
14" x 1/8" x 20mm	AC24/100	4400	20010516	64199	10



Type 1

Tyrolit PREMIUM High Speed Gas & Portable Saw Wheels for Masonry & Concrete

- · Premium silicon carbide grain
- When increased productivity is required in cutting concrete, masonry, stone and PVC pipe

Superior cut rate and wheel life



High Speed Gas & Portable Saws

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
12" x 1/8" x 1"	1C24/100	5100	20010517	64200	10
12" x 1/8" x 20mm	1C24/100	5100	20010518	64202	10
14" x 1/8" x 1"	1C24/100	4400	20010519	64203	10
14" x 1/8" x 20mm	1C24/100	4400	20010521	64204	10





Type 1

UNV Universal Arbor (1" & 20mm)

FLAP DISCS



Tyrolit BASIC 2 in 1 Zirconia Flap Discs for Steel and Stainless Steel



- · General purpose, economically priced flap disc
- Zirconium grain
- Suitable for grinding, deburring, trimming, beveling, cleaning surface conditioning
- Contaminant-free/ iron, sulfur and chlorine <0.1%

Right Angle Grinder

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4-1/2" x 7/8"	ZA40-B	13280	34335386	54121	10
4-1/2" x 7/8"	ZA80-B	13280	34335390	94147	10





Tyrolit PREMIUM Zirconia Flap Discs for Steel and Stainless Steel

- · Premium zirconium grain
- · Suitable for grinding work, deburring, trimming, beveling, cleaning & surface conditioning
- Extremely long life compared to aluminum oxide discs
- · Suitable for grinding steel, stainless steel and cast materials
- Contaminate-free of iron, sulfur and chlorine, <0.1%



Right Angle

Grinder



Type 27

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4-1/2" x 7/8"	ZA40-B	13280	34334161	94155	10
4-1/2" x 7/8"	ZA60-B	13280	34334163	94156	10
4-1/2" x 7/8"	ZA80-B	13280	34334165	46938	10
4-1/2" x 7/8"	ZA40-B (plastic back)	13280	34333927	94157	10
4-1/2" x 7/8"	ZA60-B (plastic back)	13280	34333965	94158	10
4-1/2" x 7/8"	ZA80-B (plastic back)	13280	34334029	94159	10



Type 29

Tyrolit PREMIUM Zirconia Flap Discs for Steel and Stainless Steel

- · Premium zirconium grain
- Suitable for grinding work, deburring, trimming, beveling, cleaning & surface conditioning
- Extremely long life compared to aluminum oxide discs
- Suitable for grinding steel, stainless steel and cast materials
- Contaminate-free of iron, sulfur and chlorine, <0.1%

	Q.	V	1
100	ı١		
		•	

15°

Right Angle

Grinder

SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.
4-1/2" x 7/8"	ZA40-B	13280	34334120	68890	10
4-1/2" x 7/8"	ZA60-B	13280	34334676	46964	10
4-1/2" x 7/8"	ZA80-B	13280	34334145	59859	10
4-1/2" x 5/8"-11	ZA40-B	13280	34334141	94168	10
4-1/2" x 5/8"-11	ZA60-B	13280	34334677	94169	10
4-1/2" x 5/8"-11	ZA80-B	13280	34334149	94170	10
4-1/2" x 5/8"-11	ZA120-B	13280	34334679	74370	10
5" x 7/8"	ZA40-B	12220	34334680	94171	10
HI	GH DENSI	TY JUMB	D - ULTRA	LONG-LIF	E
4-1/2" x 5/8"-11	ZA40	13280	34334098	19209	5

WIRE WHEELS





Spindle Mounted Wire **Brushes for Steel**

- · For use on portable tools and die grinders
- 1/4" diameter shank
- Designed for use in cleaning and finishing recessed areas and pipes for aggressive cutting and deburring



Straight Grinder

ĸ		Knot Type Steel Wire									
ě	Diameter	Wire Size	Trim Length	Overall Length	Max RPM	Part #	Cat #	Unit Pkg. Qty.			
S	3/4"	.020	1.20	2.80	20000	52685	63573	25			
V	1-1/8"	.020	1.20	2.80	20000	52680	63574	25			
١	Crimped Steel Wire										
	Diameter	Wire Size	Trim Length	Overall Length	Max RPM	Part #	Cat #	Unit Pkg. Qty.			
	3/4"	.020	.86	2.60	20000	52679	63575	25			
	1"	.020	1.0	2.70	20000	890722	63576	25			
				Circular F	lared Steel W	lre 💮 💮					
	Diameter	Wire Size	Trim Length	Overall Length	Max RPM	Part #	Cat #	Unit Pkg. Qty.			
	2"	.012	.50	0.50	20000	890845	64424	25			
ř	3"	.012	.60	0.75	20000	890848	63577	25			



Crimped Wire Cup Brushes for Steel

- For use on right angle grinders 5/8'-11 threaded arbor
 Designed for heavy cutting, deburring, weld prep and rust removal Fast, aggressive cutting action
 Crimped wire for greater flexibility and light cleaning and material removal, especially for irregular surfaces. Available in carbon or stainless steel wire



Right Angle Grinders



	Crimped Wire Brushes for Steel									
Diameter	Wire Size	Arbor	Max RPM	Part #	Cat #	Unit Pkg. Qty.				
2-3/4"	.012	5/8-11	12000	52666	60071	1				
4"	.014	5/8-11	9000	896251	80418	1				
5"	.020	5/8-11	6500	896253	77633	1				
6"	.020	5/8-11	6000	896254	76578	1				



Knot Wire Cup Brushes for Steel or Stainless Steel

- For use on right angle grinders 5/8"-11 threaded arbor
- Designed for heavy cutting, deburring, weld prep and rust removal Fast, aggressive cutting action
 Weld or large area cleaning



Right Angle **Grinders**



THE SHOP A PROTECTION OF THE ASSAULT	A CONTRACTOR OF THE PROPERTY OF	SOCUMENTS.		A SUN NEWSFELD PROSPER OF THE	ALTERNATION OF THE PROPERTY OF				
	Knot Wire Cup Brushes for Steel								
Diameter	Wire Size	Arbor	Max RP	Part #	Cat #	Unit Pkg. Qty.			
2-3/4"	.020	5/8-11	12000	52672	60072	1			
4"	.020	5/8-11	9000	52673	61851	1			
5"	.020	5/8-11	6500	52675	58778	1			
6"	.020	5/8-11	6000	52678	79856	1			
	Knot Wire	Cup Br	ushes for	INOX/Sta	ainless				
Diameter	Wire Size	Arbor	Max RPM	Part #	Cat #	Unit Pkg. Qty.			
2-3/4"	.020	5/8-11	12000	52676	60463	1			
4"	.020	5/8-11	9000	52677	64591	1			
		Wire C	up Adapt	ers					
Adapter Size	Adapter Size Adapts To Part # Cat # Unit Pkg. Qty.								
M10 x 1.50 to 5/8"-11	B&D, Hitachi, Skil	20011964	0011964 73998 1			1			
3/8-24 to 5/8"-11	Air Tools	20011965	680	002		1			



WIRE WHEELS & CUP WHEELS



Tyrolit PREMIUM Wire Brushes for Joint Crack Cleaning for Concrete

- For use on small, low horsepower walk behind saws
- Designed for cleaning concrete expansion joints
- Maximum RPM-5,000



Low HP Walk Behind Saws



Diameter	Wire Size	Arbor	Max RPM	Part #	Cat #	Unit Pkg. Qty.
12" x .625 with drive pin	.035	1"	5000	896247	76619	2
15" x .016 x 1"	52 knots	1"	5000	896248	58194	1



Tyrolit PREMIUM Twist Knot Wire Wheels for Steel or Stainless Steel

- For use on small side grinders
- Regular Twist Knot-provides low flexibility and aggressive cutting and cleaning
- Stringer Bead Twist Knot-provides more aggressive cleaning and cutting for the most demanding applications





Side **Grinders**



	Reg	ular Twi	st Knot W	ire Wheels	For Steel			
Diameter	Wire Size	Arbor	Max RPm	Part #	Cat #	Unit Pkg. Qty.		
4"	.014	5/8"-11	12000	52693	62674	1		
6"	.020	5/8"-11	9000	52697	59670	1		
	Stringer Bead Knot Wire Wheels For Steel							
4"	.020	5/8"-11	12000	52694	61506	1		
6"	.020	5/8"-11	9000	52699	61099	1		
E	legular 1	lwist Kr	not Wire W	heels For l	NOX/Stair	iless		
6"	.020	5/8"-11	9000	52702	68618	1		
S	tringer	Bead Kr	not Wire W	heels For	INOX/Stair	nless		
4"	.020	5/8"-11	12000	52700	62321	1		



Flaring Cup Wheels for Steel & Masonry

- Aluminum oxide grain
- For use on right angle grinders Coarse 16 or 24 grit wheel for demanding grinding applications Heavy stock removal on all ferrous metals



Right Angle **Grinders**





XPERT Flaring Cup Wheels for Metal-Type 11								
SIZE	Specification	Max RPM	Part #	Cat #	Unit Pkg. Qty.			
4" x 2" x 5/8"-11	A24PB (24 grit)	9050	2010525	65500	1			
6" x 2" x 5/8"-11	A24PB (24 grit)	6050	20006829	59296	1			
XPERT Flaring Cup Wheels for Masonry & Concrete-Type 11								
SIZE	Specification	Max RPM	Material #	Cat #	Unit Pkg. Qty.			
4" x 2" x 5/8"-11	C16PB (16 grit)	9050	2010526	65501	1			
5" x 2" x 5/8"-11	C16PB (16 grit)	7250	2010524	65499	1			
6" x 2" x 5/8"-11	C16PB (16 grit)	6050	20006823	59147	1			

BLOCKS, STONES & GRINDING WHEELS





Rubbing Blocks & Grinding Stones for Concrete/Masonry

- Rubbing Blocks-long life and good performance for removing mold and form marks, cleaning castings and smoothing concrete surfaces-comes with or without handle
- Grinding Stones-for removal and/or grinding concrete imperfections, uneven joints or smoothing exposed aggregate
- Available in: Coarse (fast removal), Medium (finish grinding) or Fine (smoothing surfaces)



Hand Tool



Rubbing Blocks					
SIZE/DESCRIPTION		Part #	Cat #	Unit Pkg. Qty.	
6" x 3" x 1" with handle		ABRBH-HR252	35064	5	
8" x 3-1/2" x 1-1/2" with handle ABRBH-HR250		35065	5		
8" x 2" x 2" fluted without handle		ABRBF-HR242	35062	6	
Grinding Stones					
SIZE	Grit	Material #	Cat #	Unit Pkg. Qty.	
2" x 2" x 4"	Coarse	ABCH-10	35067	6	
2" x 2" x 4"	Medium	ABCH-24	35063	6	
2" x 2" x 4"	Fine	ABCH-80	35066	6	




Zec. and Semi-Flexible Grinding Discs for Concrete/Masonry

- Zec® Disc-16 grit silicon carbide, minimal loading, ideal for grinding concrete, masonry and stone along with adhesives from concrete
- No backup pad needed
- Semi-Flex Disc-16, 24, 36, 60, 80 & 120 grit silicon carbide-a lower cost alternative to plastic-backed Zec wheels
- Must be used with backup pads







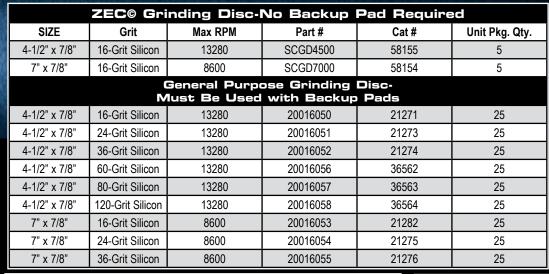

Backing Pads				
SIZE	Part #	Cat #	Unit Pkg. Qty.	
4-1/2"	44878	64970	1	
5"	44879	68811	1	
7"	44880	64548	1	

Nut for Zec© Disc		
Part #	Cat #	
SCGD-NUT	60210	

GROOVING





CC-1 & CC-2 Mini Croovers
TEC134 Bridge Deck Croover
PC1505XL Pavement Grinder & Groover
PC4504 Pavement Grinder
PC5004EC Highway Grinder
BC240T4 Grinder & Groover
CCSR Pavement Groover

GC-9 & GC-2 MINI GROOVER/GRINDERS

CG-2 with 49HP
CAT C1.7
Cilesel engine

CG-1

Wide Capacity CG-1

16" Wide Capacity CG-2

Caralla Capacity CG-2

Caralla Capacity CG-2

Caralla Capacity CG-2

FEATURES

Electric

- Compact and maneuverable machine that can be used for grooving and grinding applications
- Great for grooving and grinding and projects where large machines cannot access
- Self-propelled by hydrostatic transmission
- Heavy duty construction to handle big jobs
- Power raise and lower system
- Up-cut grinding head rotation
- Accepts 10" (CG-1) or 16" (CG-2) blades
- Electric over hydraulic raise and lower system



Uses 12" (30.48cm)diameter blades on a CG-1 10" (25.4cm) or CG-2 16" (40.64cm) grooving or grinding head with specifications that can be custom fit to your application



CG-1 with 20.5HP Honda GX690

gas engine

Useful for creating textured anti-slip areas for improved traction

CG-1 & CG-2 MINI-GROOVERS					
Model #	Engine/Capacity	Grinding Head Capacity (Width)	Part #	Cat #	Product Weight (lbs)
CG-1G24	20.5 HP (15.2 kW)Honda® GX690 Gas	10" (25.4cm)	5803003	08005	800
CG-1E15	15 HP (11.9 kW) Marathon® Electric	10" (25.4cm)	5803005	08009	780
CG-2E30	30 HP 460V (22.31 kW) Lincoln® Electric	16" (40.64cm)	5803007	08985	1,800
CG-2E30	30 HP 575V (22.31 kW) Lincoln® Electric	16" (40.64cm)	5803020	34824	1,820
CG249CT4	49 HP C1.7 CAT Diesel	16" (40.64cm)	CG249CT4	109836	1,850

Horsepower and torque as rated by the engine manufacturer.



40" Cutting Width 1 meter

Diesel

FEATURES

- Removable seat and flip up operators platform
- · Night operation light package
- · Safety strobe lights
- Adjustable carriage travel limit switches
- Lift eyes
- 90 gallon fuel capacity allows for up to 10 hours of operation
- Power steering
- Rear crab steer allows for operation in small areas
- Grooves within 12" (34.48cm) of curb or barrier wall

TBG134 SPECIFICATIONS

Engine: Caterpillar C4.4 174HP (129.7Kw) @ 2200rpm turbo-

charged/intercooled electronically controlled diesel engine. Meets U.S. EPA Tier 4 Final and EU stage V emission requirements. Fuel consumption is

approximately 10gph (37.8 LPH)

Fuel Capacity: 90 gallon (370L)

Hydraulic Oil

Tank Capacity: 70 gallon (259L)


Dimensions: Length 8ft,, Width 8ft 2in, Height 10ft (304cm),

Weight 12,500lbs (26,400kg) estimated


Cutting Width: 40in (1meter))
Blade Diameter: 12in(30.48cm)

UNIQUE "CRAB" FEATURE

A switch is provided on the control panel which causes the rear drive wheels to pivot to 28 degrees. A quick turn of the steering wheel to full left lock positions the front wheels at the same 28 degrees. This allows the TBG134 to "crab" sideways while backing up and remain parallel to the previously cut grooves. The TBG134 can thus groove in a 12' wide lane and realign for the next pass in one backward movement. NO MACHINE ON THE MARKET TODAY OFFERS THIS FEATURE. (see diagrams to the right).

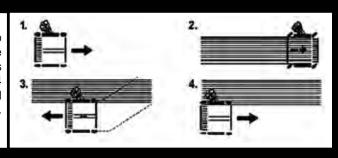



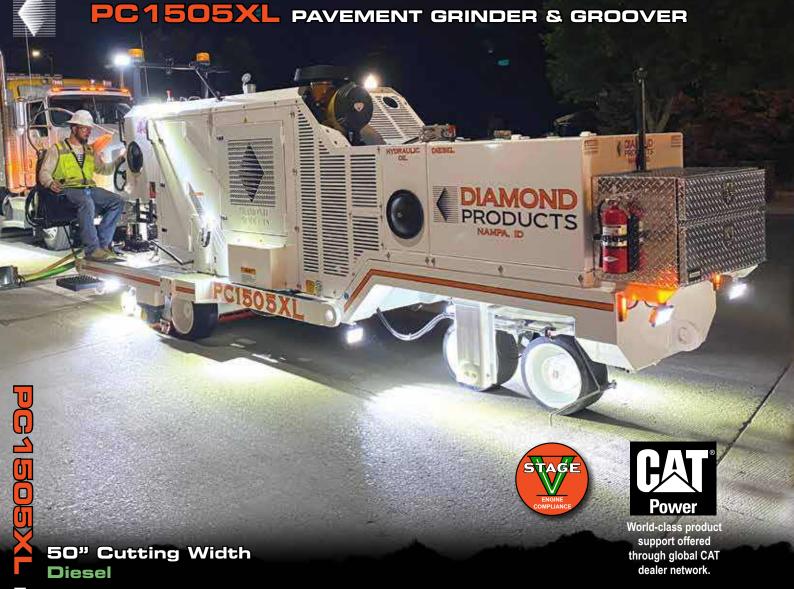

FEATURES

- High production grinding/profiling of concrete and asphalt pavements
- Centrally located operator station allows for either left or right side operation
- On board slurry vacuum and discharge system
- Hydraulically adjustable. Raise/lower, profile wheels
- · Profile wheels manually side to side adjustable for accurate matching of previous cut
- Stainless steel fresh water system with basket filter
- Out of cut travel speed up to 250 feet per minute (76.2 meters per minute)
- Equipped with odometer that measures total footage and has a resettable daily production odometer. Odometer screen also displays feet per minute. Display can be set to measure in either feet or meters.
- Optional: Head temperature monitoring system with temperature display. Displays in Fahrenheit or Centigrade
- The PC1505XL is excellent for longitudinal highway or transverse airport groover. The front bogey assembly is adjustable from 9 foot
 effective wheelbase to allow grooving to within 10 feet (3.04 meters) of the runway edge, to 11 feet effective wheel base for accurate
 grinding/ profiling of bumps in concrete or asphalt pavements.
- Manually adjustable grooving depth control legs are attached to the mainframe of the PC1505XL. The depth control wheels are
 positioned on the blade shaft centerline for accurate depth control.
- Grinds to within 10 inches (25.4cm) of vertical wall, right side only.
- Easy To operate and comfortable to run



PC1505XL SPECIFICATIONS

Engine: CAT C7.1 ACERT 302HP @ 2200 rpm Engine meets U.S. EPA Tier 4 Final and EU Stage V Emission Standards and meets

European Machinery Directive 2006/42/EC, Service free DPF for the emissions life of the engine.

Fuel consumption: 10.8 GPH (40.9 LPH)

Dimensions: Length: 23 feet (7.01 meters); Width: 8 feet 5 inch (2.56 meters) with grooving legs installed; Height: 10 feet (3.04 meters)

Weight: 24,500 LBS (10,659.5 Kilograms) estimated

Fuel Capacity: 150 Gallons (567 Liters)

Blade Shaft: 5 inch (12.7cm) Diameter with 4 Draw bolts

Blade Capacity Diameter:12 inches (30.48 cm)
Cutting Width: 50 inches (127cm)

Blade Shaft RPM: 1400 RPM low – 1900 RPM high

Blade Shaft Drive: Manually engaged PTO clutch /right angle drive gearbox drives single Poly Chain GT Carbon Belt drives blade shaft.

Ground Drive: Closed loop Hydrostatic pump drives two wheel motor assemblies. Wheel motor assemblies have integral brakes and two

speed function.

Vacuum System: Belt driven positive displacement blower with demister and inlet filters, 3 inch (7.62cm) slurry discharge pump.

Machine Controls: An Electronic Joystick equipped with Operator Presence Switch controls the grounddrive and machine raise/lower functions.

Other controls include: Power Steering, Water On/Off valve, 2-Speed, Brake On/Off, EliStop, Left/Right Profile Wheel Depth Control, and Front Slide

Control.

Instrumentation: Digital engine panel and Digital Odometer/Hydraulic System Pressures Monitoring Panel

Lighting: Full complement of work lights, safety beacons and flashers for night operations

Part #: PC1505XL **Catalog #**: 103369



C4504 PAVEMENT GRINDER



Diesel

FEATURES

- High Production pavement grinding on either concrete or asphalt.
- Designed for small continuous grinding projects or bump grinding.
- Can be operated manually or with computer controlled cruise control system that automatically adjusts forward speed to cutting conditions.
- Equipped with odometer that measures total footage (meters) ground and has a resettable daily production odometer and feet (meters) per minute indicator.
- On board slurry vacuum and discharge system.
- Centrally located operator station allows for either left or right side operation.
- Hydraulically controlled depth control wheels.
- Depth control wheels are side to side adjustable for accurate cut matching.
- Designed to grind within 9.5 inches (24.1cm) of curb face and raised medians.
- The PC4504 is excellent for Urban/City Street grinding projects.
- Stainless steel fresh water system



Grinding Heads

Diamond Products helps maximize the life of its grinding heads by matching the correct diamond concentrations with machine horsepower

We manufacture high quality, long lasting CORE CUT™ grinding and grooving blades in all arbors for all types of machines. Call your local sales representative for blade specifications that fit your grooving and grinding machine.

PC4504 PAVEMENT GRINDER





PC4504 SPECIFICATIONS

Engine: Caterpillar® C18, 575 HP @ 2100 RPM, Turbocharged and after-cooled electronically controlled diesel engine. Meets U.S. EPA Tier

4, EU Stage V emission requirements. Fuel capacity: 220 Gallons (832 Liters), Fuel consumption: 28.3 GPH

Dimensions: Length: 30', Width: 7', Height: 9'6", Weight: 46,500 lbs (21, 092Kg)

Blade Capacity: 18" diamond blades

Blade shaft Drive: Engine power is transmitted to blade shaft through a fluid clutch/hydraulic pump drive gearbox. A single Poly Chain GT Carbon belt

drives blade shaft.

Cut Width: 50 inches (127cm)

Blade shaft: 8" (20.32cm) diameter with 2 keyways
Blade shaft Speeds: High range-1,900 RPM, Low range-1,315 RPM

Ground Drive: 4 hydraulic wheel motor assemblies with integral brake and two speed function speed is 0-250 feet per minute forward/reverse

Machine Controls: Electronic joystick forward/reverse control, Engine voltage meter, Safety shutdowns and alarms on engine, hydraulic system and

transmission, Hydraulic system pressure monitoring gauge, Water pressure gauge and alarm, Lighted for night operation, safety

beacons and backup alarm

Engine Instruments: Electronic screen displays engine RPM, oil pressure, coolant temp, engine hours, volt meter. Screen also provides for

engine diagnostics and fault codes.



Centrally-located control station



Ability to grind close to barrier walls and curb



50" Cutting Width

Diesel

FEATURES





- Designed for high production grinding/profiling of concrete and asphalt pavements
- · Centrally located operator station allows for either left or right-side operation
- Can be operated manually or with computer-controlled cruise control system that automatically adjusts forward speed to cutting conditions
- Equipped with odometer that measures total footage (meters) ground and has a resettable daily production odometer and feet (meters) per minute indicator
- On board slurry vacuum and discharge system
- Depth control wheel assemblies are side to side adjustable for accurate cut matching
- Hydraulically controlled depth control wheels
- Front wheel bogey assembly is adjustable 11ft to 15ft 6in to optimize cutting plane based on job conditions
- Can be transported with standard 3-axle semi tractor.
- On board 2850-gallon (8327 L) stainless steel water tank with hydraulically driven water pump. On board water filtration is provided.
 Water system plumbing and spray bar are stainless steel to eliminate system rust.



The PC6004EC Pavement Grinder brings proven and patented closed loop control to the field of pavement diamond grinding. Built at our Nampa, Idaho Facility. The revolutionary PC6004EC is state-of-the-art in pavement grinding efficiency.

Call 800-225-0142 for more information

PC6004EC PAVEMENT GRINDER





PC6004EC SPECIFICATIONS

Main Engine: Caterpillar® C18 630HP (469.7Kw) Turbocharged and air to air after-cooled electronically controlled diesel engine. Meets U.S.

EPA Tier 4 Final and EU Stage V emission. Fuel consumption is approximately 30GPH (113 LPH) @ 1900RPM.

Auxiliary Engine: Caterpillar® C4.4 148HP (110.3Kw) Turbocharged and air-to-air after- cooled electronically controlled diesel engine. Meets U.S.

EPA Tier 4 Final and EU Stage IV emission. Fuel consumption is approximately 9GPH (34 LPH) @ 2200 RPM.

Dimensions: Length: 49' (14.9 Meters) Width: 8' 8"(264.1CM)

Height: 12' 8"(386.08CM)

Weight: 57,000 lbs. (25,401 Kg) with blade shaft installed and full fuel tank, 80,000 lbs. (34,020 Kg) with full water tank. Note: The

PC6004EC is a legal load with water tank empty when attached for transport to a standard 3-axle semi-tractor. U.S. standard

ABS brake and light connections are provided.

Blade shaft Drive: Engine power is transmitted to blade shaft through an Electro/Hydraulic fluid clutch, heavy duty coupling, right angle drive and

two Poly Chain GT Carbon belts

Cutting Width: 50" (127Cm)

Blade shaft: 8"(20.32Cm) diameter with 2 key ways
Blade shaft Speed: Low 1315 RPM, High 1900 RPM

Blade Capacity: 16"(40.64Cm) or 18"(45.72Cm) diameter blades may be used. Quantity is dependent on blade spacing requirements.

Travel Speed: Maximum travel speed 250 FPM (76.2mpm) forward/Reverse.

Fuel Capacity: 450 Gallon (1703.25L) Stainless steel - Note: Single tank supplies fuel to both engines

Hydraulic Oil Capacity: 100 Gallon (378.5L) Note: Hydraulic tank has in tank mounted return oil filtration. Air over oil coolers are mounted to main

engine radiator to provide hydraulic oil, Fuel and right angle drive.

Hydraulic Systems

Ground drive: Closed loop electronically controlled hydrostatic pump drives two piston motors that are mounted

to two Torque hubs on traction frame.

Vacuum System Drive: Open loop hydraulic controlled with soft start valve.

Auxiliary Drive: Open loop. Auxiliary functions such as raise/lower, slurry pump on/off. Some other functions are manually controlled such as

landing legs and front bogey slide.

Steering: Power steering is standard.

Machine Controls: Instrumentation and machine controls are located at operator's station.

Instrumentation and controls includes safety shutdowns and alarms on engine, hydraulic system and transmission

Lighting: Full complement of work lights, safety beacons and flashers for night operations.

Engine Instruments: Electronic screen displays engine RPM, oil pressure, coolant temp, engine hours, volt meter. Screen also provides for

engine diagnostics and fault codes.



24" Cutting Width Diesel

FEATURES

- Great for placing concrete grooves in barn flooring and other pavement where flooring can be slippery
- Hydrostatic ground drive allows precise speed control
- Blade shaft raise/lower switch is incorporated in joystick for ease of operation
- Three stage engine air intake filter
- Two night lights for night grooving and low light areas
- Right and left side operation positions
- Fuel gauge
- Digital read out engine control panel includes Tachometer and hour meter

Call 800-225-0142 for more information

BG24DT4 BARN GROOVER





Effectively create grooves in concrete where flooring becomes slippery or where extra traction is needed.



BG24DT4 SPECIFICATIONS

Engine: Deutz 2.2L 75HP Tier 4 Final, liquid cooled, turbo charged, common rail fuel injection

System: 4 cylinder diesel engine, maximum RPM 2600.

Dimensions: Length 64 1/2 inches (163.83 cm), Width 48 5/8 inches (123.51 cm), Height 591/4" (150.49 cm)

Weight: 3500 lbs (kilograms) estimated

Fuel Capacity: 20 gallons (Liters)

Blade Shaft: 5 inches (12.7 cm) diameter with key ways

Blade Capacity: 12 inches (30.48 cm) or 14 inches (35.56 cm)

Blade Shaft RPM Max: 1300 rpm

Cutting Width: 24 inches (60.96 cm)

Blade Shaft Drive: Belt driven

Hydraulics: Electric over hydraulic adjustable blade raise / lower.

Ground Drive: Belt driven hydrostatic ground drive pump.

Machine Controls: Control lever connected to transmission controls the ground drive and machine raise/lower

Instrumentation: Digital engine panel.

Electrical: 12 Volt electrical system.

 Part #:
 BG24DT4

 Catalog #:
 105126



Ride-On Pavement
Groover with
Integral Slurry
Vacuum and
Discharge System

Powered By:

TIER 4

30" Cutting Width Diesel

FEATURES

- · Riding unit for grooving long areas of pavement
- · Compact and highly maneuverable
- Robust construction and heavy duty design
- On-board slurry vacuum & discharge system
- 30" (77.2cm) grooving width
- Uses standard 5" (12.7cm) bore 12" (30.48cm) diameter blades
- Joystick speed control with integral raise/lower switch
- Full compliment of work lights for night jobs



Digital Engine Panel, Fuel Gauge and E-Stop

CG3R SPECIFICATIONS

Engine	Deutz Turbo Diesel 2.9L, 74.9HP Tier 4 Final, EU Stage V Engine
Dimensions	Length 87-5/8" (222.57cm), Width 54-1/8" (137.48cm), Height 87-7/8" (223.2cm)
Weight	3200 lbs. (1451.5Kg) Estimated
Fuel Capacity	25.85 Gallons (97.85 liters)
Blade Shaft	5" (12.7cm) Diameter with 4-Draw Bolts
Blade Diameter	12" (30.48cm)
Cutting Width	30" (76.2cm)
Blade Shaft RPM	1300 Maximum

Blade Shaft Drive	Belt Driven
Hydraulics	Electric/Hydraulic Blade Raise/Lower
Ground Drive	Joystick-controlled Belt Driven Closed Looped hydrostatic pump
Vacuum System	Hydraulically-driven Fan and Self Priming Centrifugal Slurry Pump
Electrical	12 Volt
Speed	Up to 250 Feet Per Minute Forward/Reverse
Machine Controls	Power Steering, Joystick Ground Drive Control with Integral Head Raise/Lower Switch



CG3R PAVEMENT GROOVER			
Description	Part #	Cat #	
CG3R Pavement Groover - 74.9HP Deutz Diesel - Tier 4 Final	CG3R	99357	





Call 800-225-0142 for more information



DIAMOND TOOLS LIMITED WARRANTY

Diamond Products Limited warrants all of its diamond tools against defects in material and workmanship for a period of one (1) year from the date of shipment to Customer. All laser welded blades and bits are warranted against segment loss due to weld failure. Determination of the applicability of warranty will be made after the product is inspected by our Warranty Claims Department. The warranty does not cover any tool which Diamond Products determines to have been used in an improper application, subjected to negligent abuse, improperly mounted, altered, involved in a non-application accident or miscellaneously damaged. The responsibility of Diamond Products under this Warranty is limited to repair or replacement at Diamond Products' option free of charge. In no event shall Diamond Products be liable for consequential or incidental damages. This warranty includes all labor, parts and shipping costs via UPS ground. Proof of purchase in the form of an invoice showing the date of shipment to be within one (1) year must accompany all warranty claims. Diamond Products reserves the right to prorate any warranty claim based upon a percentage of tool life prior to the failure in question.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, AND ALL SUCH OTHER WARRANTIES ARE HEREBY DISCLAIMED.

EQUIPMENT LIMITED WARRANTY

Diamond Products warrants all products manufactured by it against defects in material and workmanship under normal use and service for a period of one (1) year from the date of shipment to Customer. The responsibility of Diamond Products under this Warranty is limited to replacement or repair of defective parts at Diamond Products' Elyria, Ohio factory, or at a point designated by it, of such parts as shall appear to us upon inspection at such point, to have been defective in material or workmanship, with expense for transportation and labor born by Customer. In no event shall Diamond Products be liable for consequential or incidental damages arising out of the failure of any product to operate properly. Integral units such as gasoline engines, electric motors, batteries, tires, transmissions, etc., are excluded from this Warranty and are subject to prime manufacturer's warranty.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, AND ALL SUCH OTHER WARRANTIES ARE HEREBY DISCLAIMED.

ABRASIVES LIMITED WARRANTY

Diamond Products Limited warrants all of its abrasive products against defects in material and workmanship for a period of one (1) year from the date of shipment to Customer.

The warranty does not cover any products which Diamond Products determines to have been used in an improper application, subjected to negligent abuse, improperly mounted, altered, involved in a non-application accident or miscellaneously damaged.

The responsibility of Diamond Products under this Warranty is limited to repair or replacement at Diamond Products' option free of charge. In no event shall Diamond Products be liable for consequential or incidental damages. This warranty includes all labor, parts and shipping costs via UPS ground. Proof of purchase in the form of an invoice showing the date of shipment to be within one (1) year must accompany all warranty claims. Diamond Products reserves the right to prorate any warranty claim based upon a percentage of product life prior to the failure in question.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, AND ALL SUCH OTHER WARRANTIES ARE HEREBY DISCLAIMED.

HIGHWAY GROOVING MACHINERY LIMITED WARRANTY

Diamond Products Limited makes the following limited warranty:

Diamond Products warrants each new and unused grooving or grinding machine and accessory equipment sold by it (except items not manufactured by Diamond Products such as engines, pumps, transmissions, and other trade accessories sold with, attached to, or operated with Diamond Products' products), to be free from defects in material and workmanship under normal use and service for one (1) year from the date of shipment from the Diamond Products factory, the obligation under this warranty being limited to the replacement or repair at the Diamond Products factory, or at a point designated by it, of such parts as shall appear to it upon inspection at such point to have been defective in material or workmanship at the time sold, provided that the parts or parts claimed defective are returned to inspection points, transportation charges prepaid.

If after inspection of the returned products, Diamond Products determines that the defect is a result of misuse, mishandling, installation, abnormal conditions of operation, unauthorized repair or modification, or due to the Buyer's failure to install, maintain or operate the product in compliance with the written instructions, all expenses incurred by Diamond Products in connection with the replacement or repair of the product shall be for the account of the Buyer. Any product returned to Diamond Products for replacement shall become the property of Diamond Products.

The Buyer shall be responsible for all costs of shipping, customs clearance and other related charges in connection with Diamond Products' replacement or repair of products located outside the continental United States pursuant to the limited warranty.

This warranty applies only to new and unused grooving or grinding machines and accessory equipment which after shipment from the Diamond Products factory have not been altered, changed or repaired in any manner. Maintenance items, such as filters, V-belts, air cleaners, wheels or Blade shaft bearings, are not covered under this warranty. The validity, performance and interpretation of the limited warranty shall be governed by the internal laws (and not the laws of conflicts) of the State of Ohio. All disputes arising in connection with the limited warranty shall be resolved, if not sooner settled, by a court of competent jurisdiction located in Canyon County, Idaho, U.S.A.

Exclusive Remedy:

Replacement or repair of the Diamond Products' products as provided under this warranty is the Buyer's exclusive remedy. This exclusive remedy will not be deemed to have failed of its essential purpose so long as Diamond Products is willing and able to replace or repair any defective product in the prescribed manner. In the event Diamond Products fails to replace or repair the product as aforesaid, Diamond Products' entire liability shall not exceed the amount paid by the Buyer to Diamond Products for its purchase of the defective product.

Limitations on Warranty:

In no event shall Diamond Products be liable for any indirect, special, incidental, consequential or other damages, including but not limited to damage to or loss of property or equipment, lost revenues or profits, or harm to goodwill or business reputation directly or indirectly arising from the sale, handling or use of the product, or from any other cause relating thereto and Diamond Products' liability hereunder. Diamond Products shall not be liable to the Buyer for any claims, demand, injuries, damages, actions or causes of action what so ever based on negligence or strict liability.

Exclusions of Warranties:

Diamond Products, Limited makes no warranty that the products sold hereunder shall be merchantable or that such products shall be fit for any particular purpose. Moreover, Diamond Products makes no express or implied warranties except for the Limited Warranty outlined above. In addition, no representation or warranty, express or implied, made by any distributor, sales representative, or field agent of Diamond Products which is not specifically set forth herein shall be binding on Diamond Products.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED. AND ALL SUCH OTHER WARRANTIES ARE HEREBY DISCLAIMED.











WORLD OF



































PLACING ORDERS

800-321-5336

FAX: 800-634-4035

custserv@diamondproducts.com

Our Customer Service Representative Will Need:

Company name and billing address
 Your Purchase Order No. and/or name
 Resale, Tax or other special situations
 Shipping address, if different
 Your Diamond Products Customer #
 Date Needed
 Special Instructions
 Product(s) desired:

Example:

Quantity Catalog # Description

1 12462 4" X .250 Standard Gold Dry Tuck Point Blade

1 39317 M-1 with CB733 Complete Combo Rig

CUSTOMER SERVICE POLICIES

FAST PAY DISCOUNT:

A Fast Pay Cash Discount will be allowed when payment is received within the terms specified on your invoice.

SALES TAX:

Sales tax will be charged where applicable unless a tax exemption certificate is provided.

REPAIRS:

Items returned for repair should be carefully packaged and accompanied by a Packing Slip with the following information:

- · (RGA) number obtained from the Returns Dept. or Customer Service Dept.
- · Your company name, address, phone and email · List of items for repair · Returned Goods Authorization
- Explanation of repair(s) needed Original invoice (warranty only)

TEST POLICY:

Purchase orders are requested and full payment is expected on all test products. Product tests will be invoiced on the basis of normal ordering quantity that the customer is expected to purchase if the trial is successful. Orders must specify the exact number normally purchased and be invoiced on that basis. Tests proving only partially satisfactory, but usable, will be credited on the basis of the value received. Tests proving completely unsatisfactory receive full credit.

REPLACEMENT/REFUND:

All catalog items returned to stock are subject to a 15% restocking fee. Non-catalog items, special order items and any item beyond two (2) years from original invoice date are subject to a mandatory 50% restocking fee. Discontinued items and/or items purchased beyond four (4) years from original invoice date cannot be returned. Items returned for replacement or refund should be in original cartons and must be accompanied by a packing slip with the following information:

- · Returned Goods Authorization (RGA) number obtained from Returns Dept or Customer Service Dept.
- · List of items returned · Reason(s) for return(s) · Copy of original invoice(s)

FREIGHT POLICY:

Freight is paid on orders that include the following:

COMPLETE EQUIPMENT

(Walk Behind Saws, Complete Core Rigs, Wall Saw Systems, Choice System Wall Saws, Complete Core Vacs):

• Four or more pieces of Complete Equipment shipped within the continental U.S. and does not include Hand-Held Equipment. HAND-HELD EQUIPMENT

(Electric or Hydraulic Hand-Held Saws, Hand-Held Core Drill Motors, Hand-Held Choice System Equipment):

- Four or more pieces of Hand-Held Equipment shipped within the continental U.S. and does not include Complete Equipment.
- COMPLETE EQUIPMENT AND HAND-HELD EQUIPMENT CANNOT BE MIXED TO GET FREIGHT PAID ON FOUR PIECES.
- Diamond blades, bits and abrasive orders totaling \$1,000.00 or more net. (freight paid via ground or truck excluding carbide core bits and threaded caps and barrels. Premium shipping (i.e. 2nd day or overnight is always charged.)
- Diamond blade, bits and abrasive orders totaling \$1,500.00 or more net that include equipment parts (freight paid via ground or truck. Parts on the same order will be freight paid but must have the \$1,500.00 in diamond tools included. Factory freight fee is waived under this guideline. This does not apply to: transmissions, motors or engines, hydraulic pumps or fuel cases. This also does not apply to equipment parts from our Nampa, ID facility.)

Other Freight Policy Details:

Equipment being picked up or shipped from a warehouse is subject to additional freight charges. Equipment parts are charged freight. Shipments to Puerto Rico have a minimum of \$8,000 (abrasives), \$6,000 (diamond blades and bits). Any prepaid freight does not apply going to Alaska or Hawaii.

Diamond Products reserves the right to update list prices as needed during the effective date period.

Call (800) 321-5336

To open your internet account for order status, shipping information, order confirmations, net pricing or register online.

Diamond Products, Core Cut, Core Bore, Core Prep, Core Vac, Core Power logos, and quality grades are trademark (™) of Diamond Products Limited.

Tyrolit logo is trademark (™) of Tyrolit, part of the Swarovski Group.





Manufacturers of Diamond Blades, Core Bore and Equipment for the Construction Industry









Diamond Products Limited 333 Prospect Street, Elyria, OH 44035 U.S.A. Phone: 800-321-5336 Fax: 800-634-4035